



# ACORN USER

For the BBC micro and Atom computers

March 1983 £1

Atom hardware conversion


Printers: a layman's guide

Micros and maths

Atom with BBC Basic

Beeb sound

**Chess**  
on the  
**BBC micro**  
computers versus machines

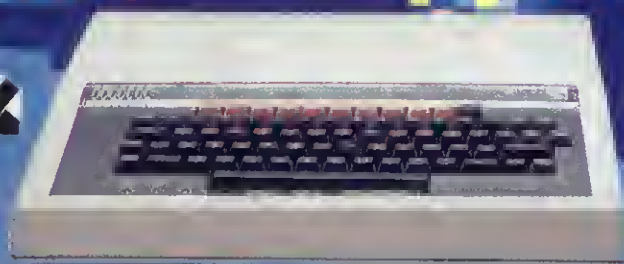

DIY Lightpen for £17

**96**  
pages

# ACORN USER

MARCH 1983, NUMBER EIGHT

Editor  
Tony Quinn  
Editorial Assistant  
Kitty Milne  
Managing Editor  
Jane Fransella

Production  
Peter Ansell  
Tina Teare

Marketing Manager  
Paul Thompson

Promotion Manager  
Pat Bitton

Publisher  
Stanley Malcolm

Designers and Typesetters  
GMGraphics, Harrow Hill

Graphic Designer  
Phil Kanssen

Printed in Great Britain  
by E.T.Heron & Co. Ltd

Advertising Agents  
Computer Marketplace Ltd  
20 Orange Street  
London WC2H 7ED  
01-930 1612

Distributed to the News Trade  
by Magnum Distribution Ltd,  
72-8 Fleet Street,  
London EC4Y 1HY.  
Tel: 01-583 0961  
Telex: 893340 Magnum G.

Published by  
Addison-Wesley Publishers Ltd.  
53 Bedford Square,  
London WC1B 3DZ  
Telephone: 01-631 1636  
Telex: 881 1948  
ISSN: 201-17002 7  
©Addison-Wesley  
Publishers Ltd 1983

## Subscription Information

For UK Subscriptions, send your cheque or postal order made payable to Addison-Wesley Publishers Ltd to:

Acorn User FREEPOST  
BKT (Subscription Services) Ltd  
Douglas Road,  
Tonbridge  
Kent TN9 2TS  
England  
Tel: (0732) 351216  
Telex: 95573

## Annual subscription rates

UK	£15
Europe	£18
Middle East	£20
The Americas and Africa	£22
Rest of the World	£24

## 3 News

### 4 Caption competition

### 8 BBC update

David Allen describes some spin-offs from the TV series

### 11 Chess: the big review

John Vaux compares three programs with a dedicated machine

### 15 Beeb forum

Ian Birnbaum on programming

### 19 Musical synthesis

Jim McGregor and Alan Watt assess the Beeb's potential

### 27 DIY lightpen

Joe Telford shows you how in a hardware session of **Hints and Tips**

### 33 Lightpen OXO

Software from Joe Telford

### 39 Lightpen multiple choice

### 41 BBC assembler

Tony Shaw and John Ferguson tackle indirect addressing

### 45 Micros in primary schools

Maths is put under scrutiny

### 51 Software review

Three educational packages worthy of consideration

### 53 Microprimer review

How good is the MEP's package? Heather Govier finds out

### 57 Software review

Eight packs for the Beeb

### 63 User groups

### 64 Atom ROM review

Bruce Smith gives his opinion of the Ross toolkit

### 67 Atom analogue converter

Circuitry and software by Paul Beverley

### 71 BBC Basic board

Barry Pickles provides a way round some of its limitations

### 75 Competition

Simon Dally offers software for solving his puzzler

### 79 Book reviews

Assembly language and Pascal among this month's offerings

### 83 Printers for beginners

First part of this layman's guide by George Hill

### 89 Back issues and subscriptions

How to get the ones you missed, and those you don't want to miss

### 91 Letters

Readers' queries and comments on everything from discs to EPROMs

### 95 Official dealer list

Where to go for the upgrades and support



Cover design by Mike Milne

## How to submit articles

You are welcome to submit articles to the Editor of *Acorn User* for publication. *Acorn User* cannot undertake to return them unless a stamped addressed envelope is enclosed. Articles should be typed or computer written. Black and white photographs or transparencies are also appreciated. If submitting programs please send a cassette or disc. Payment is £50 per page or pro rata. Please indicate if you have submitted your article elsewhere. Send articles, reviews and information to: The Editor, *Acorn User*, 53 Bedford Square, London WC1B 3DZ.

Coming soon in *Acorn User*:

- Games listings ● Language ROMs for the Beeb ● Software reviews ●
- Programming in primary schools ● Discs tested ● Musical micros ● Graphics
- Atom EPROM blower ● Printer guide ●

All rights reserved. No part of this publication may be reproduced without prior written permission of the publisher. The publisher cannot accept any responsibility for errors in articles, programs or advertisements published. The opinions expressed on the pages of this journal are those of the authors and do not necessarily represent those of the publisher. Acorn Computers Ltd, or Acornsoft Ltd.

Acorn, Acornsoft, and the Acorn symbol are the registered trademarks of Acorn Computers Ltd and Acornsoft Ltd



# Official **BBC** Dealer

## **BBC**

### Model B £399

(price includes VAT. Carr. extra £8)

Complete Upgrade Kit **£50**  
 Installation **£15**  
 Individual Components also available.  
 All mating connectors with cables in stock.



'VIEW' BBC Word Processor ROM **£52**  
 Teletext Adaptor **£196**

2nd Processor (6502) + 64K RAM **£170**  
 2nd Processor (Z80) + 64K RAM **£170**

*Please Phone to Check Delivery Details on New Add-ons*

### WIDE RANGE OF SOFTWARE HELD IN STOCK


**SEND or PHONE FOR OUR BBC LEAFLET**

### BBC COMPATIBLE 5¼" DISC DRIVES

These are TEAC mechanism fully compatible with BBC. They are supplied with independent power supply and housed in BBC matching cabinet.

SINGLE DRIVES: 100K **£180** 200K **£255** 400K **£345**  
 DUAL DRIVE: 200K **£360** 400K **£480** 800K **£610**

Carr. £6/Single drive £8/Dual drive. Disc Cable: Single £8 Dual £12



### PRINTERS

#### NEC PC8023 BEC

- 80 Cols. 100 CPS • Proportional Spacing • Hi-Res & Block Graphics
- Bi-directional Logic Seeking • Forward & Reverse Line Feed • International & Greek Alphabet • Auto underline
- Super & Sub Scripts • 2K Built-in buffer

**£320 + £8 Carr**



#### EPSON MX80 & 100F/T3

- MX80: 80 Cols. 80 CPS • MX100: 136 Cols. 100 CPS • Bit Image Printing
- Hi-Res Graphics • Bi Directional Logic Seeking • International Characters
- 32 Print FONTS • Auto underline
- Super & Sub Scripts

MX80 F/T3 **£325 + £8 Carr.**  
 MX100 F/T **£425 + £10 Carr.**

Please send SAE for our detailed price list of electronic and computer components

#### SEIKOSHA GP100A

- 80 Cols. 30 CPS • Self Testing • Hi-Res Graphics • Standard & Double width characters only

**£185 + £6 Carr.**



### MONITORS

Microvitec 1431 14" Colour Monitor **£269 + £8 Carr.**

Microvitec 2031 20" Colour Monitor **£389 + £8 Carr.**

Kaga 12" Colour Monitor RGB

**£250 + £8 Carr.**

Kaga 12" Antiglare Green Monitor

**£107 + £6 Carr.**

Hi-Res 12" Green Screen Antiglare Monitor **£99 + £6 Carr.**

Ferguson Cassette Recorder

**£26 + £1.50 Carr.**

Cassette Leads

7 pin DIN 3 jacks **£3.50**

7 pin DIN pin DIN + jack **£4.00**

We carry a wide range of connectors and assemblies, Microprocessors, RAMs, EPROMs, Crystals, etc. Price Lists, Leaflets available on request. Large stocks enable same day despatch on most orders. Special pricing for dealers purchasing in quantity.

### BBC DISC SYSTEM

Disc Interface inc. 1.0 operating System **£95** Installation **£20**

BBC Single Drive (100K)

**£230 + £6 Carr.**

BBC Dual Drive (800K)

**£POA**

*A wide range of Software from Acorn, BBC and others for education and fun in stock.*

### BOOKS

Basic Programming on BBC **£5.95**

30 HR Basic (NEC) **£5.95**

Let your BBC teach you to Program **£6.95**

BBC Micro Revealed **£7.95**

Assy. Lang. Program on BBC **£8.95**

Program the 6502 **£10.75** 6502 Games **£10.75**

6502 Software Design **£10.50**

(No VAT on Books — £1 p&p/book)

*For Full Details of Add-ons for BBC Send for our Leaflet.*

### DISKETTES

in packs of 10

Single Sided 40 tracks **£15**

Single Sided 80 tracks **£24**

Double Sided 80 tracks **£32**

p&p £2/pack

## TECHNOMATIC LTD

MAIL ORDERS TO: 17 BURNLEY ROAD, LONDON NW10 1ED

SHOPS AT: 17 BURNLEY ROAD, LONDON NW10

(Tel: 01-452 1500, 01-450 6597. Telex: 922800)

305 EDGWARE ROAD, LONDON W2

**PLEASE ADD 40p p&p & 15% VAT**

(Export: no VAT, p&p at Cost)

Orders from Government Depts. & Colleges etc. welcome.



Detailed Price List on request

Stock items are normally by return of post.



# Second processor timings

BENCHMARK timings from Acorn for the BBC micro with a 6502 second processor take the machine from third to first place in the top ten speed ratings for micros.

According to October's *PCW*, the Olivetti M20 was top in all the machines they reviewed. The BBC micro came third, with the DAI second.

Even more interesting is a price comparison. The DAI is no longer sold in Britain, the Olivetti costs over £2000, and the Beeb with the 6502 second processor about £600.

The second processor uses the same eight-bit chip as the Beeb - a 6502 micro-processor. It is this which performs all the calculations within the machine.

As well as increasing the machine's speed by about half, the second processor means an extra 64k of RAM can be used.

Two more second processors are planned, based on the eight-bit Z80 and 32-bit 16032 chips. Development of these is not as far advanced, but engineers at Acorn are already comparing the 32-bit system to *mini* computers, never mind micros.

Source of comparative timings and the benchmarks themselves is *Microprocessors and Microsystems* (October 1978 vol2 no5) with an update from *Personal Computer World* (October 1981). The benchmarks are listed in order according to benchmark 7.

	1	2	3	4	5	6	7	8	7+8
3MHz BBC in 6502 Second Processor	0.42	1.73	4.95	5.25	5.51	8.46	13.18	3.08	16.26
2MHz BBC	0.61	2.6	7.43	7.88	8.27	12.69	19.77	4.62	24.39
1MHz Atom Basic	0.50	5.07	9.49	10.8	13.85	19.14	31.06		
4MHz 380Z TDL	1.4	6.5	13.2	13.9	15.0	22.3	31.6	6.2	37.8
4MHz Osbourne 1	1.4	4.4	11.7	11.6	12.3	21.9	34.9	6.1	41.0
4.77MHz 8088 IBM	1.5	5.2	12.1	12.6	13.6	23.5	37.4	3.5	40.9
1MHz BBC in ATOM	1.21	5.20	14.86	15.75	16.53	25.39	39.54	9.24	48.78
Vic20	1.4	8.3	15.5	17.1	18.3	27.2	42.7	9.9	53.6
Applesoft	1.3	8.5	16.0	17.8	19.1	28.6	44.8	10.7	55.5
Pet2001	1.7	9.9	18.4	20.4	21.7	32.5	50.9	12.3	63.2
1MHz 6809 TRSCOL	2.0	11.3	22.2	23.9	27.0	41.5	61.1	13.0	74.1
ZX81 fast mode	4.5	6.9	16.4	15.8	18.6	49.7	68.5	22.9	91.4
ZX Spectrum	4.8	8.7	21.1	20.4	24.0	55.3	80.7	25.3	111.0
ZX81 slow mode	17.7	27.2	65.3	63.0	74.2	199.3	275.6	91.6	367.2
*Olivetti M20	1.3	4.0	8.1	8.5	9.6	17.4	26.7	1.6	
*BBC	1.0	3.1	8.2	8.7	9.1	13.9	21.4	5.1	

The processors' cycle times are related to their clock frequencies as follows:

6502 cycles per second equals clock frequency

Z80 cycles per second equals clock frequency divided by 2.5

6809 cycles per second equals clock frequency

8088 cycles per second equals clock frequency divided by 4

Thus a 2MHz 6502 is vaguely equivalent to: 5MHz Z80, 2MHz 6809, 8MHz 8088.

The 1MHz timing applies to Atom and Acorn System versions of BBC Basic.

\*These two timings are from *PCW* (October 1982). The timings are not strictly comparable with the figure above as *PCW* used a pre-production BBC machine. Also, the BBC machines timed themselves in the Acorn figures.


## Micros in intensive care

A HOSPITAL is so delighted with its four BBC micros that it is planning to buy a dozen more. St Thomas's Hospital in London installed the first of its micros in an intensive care unit.

The consultant in charge believes hospitals could easily afford to equip their intensive care units with the BBC micro - and save money.

St Thomas's plans to use the three other micros to monitor heart-related problems, artificial kidney systems for renal dialysis and incontinence in children.

Other possibilities for the Beeb's use are being explored by the hospital administration. It could, for example, store every detail of a patient's condition as an addition to medical records.

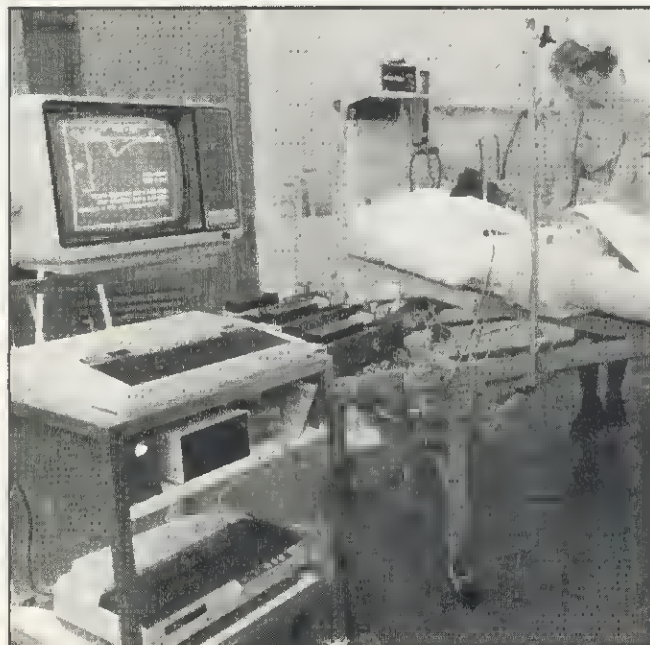

## Show dates

□ The Manchester Home Computer Show opens its doors from April 22 to 24. The Midland Hotel is the venue. Details from ASP, 145 Charing Cross Rd, London WC2H 0EE.

□ Artificial Intelligence and Education is the theme of a conference to be held at Exeter University on April 16-17. Seymour Papert (as in *Logo*) will be there and tutorials will be held on *Prolog* and *Logo*.

Details from Masoud Yazdani, Computer Science, Exeter University, Physics Building, Stocker Rd, Exeter EX4 4OL. Tel: (0392) 77911 ext. 216.

□ Bristol University is running several courses using BBC micros. Contact D. Wilde or Mrs. L. Skinner, Extramural studies, 32 Tyndalls Park Rd, Bristol BS8 1HR. Tel: (0272) 24161





## Telesoftware launch due

THE BBC's telesoftware service could be ready for an April launch. Acorn's teletext adaptors were on show at January's BBC micro trade exhibition and are starting production.

Teletext is a process whereby information transmitted by BBC's Ceefax and ITV's Oracle can be accepted and stored by a micro. This removes the need for a special TV set and means software can be broadcast and downloaded into a computer directly.

Graham Clayton, head of

Ceefax, explained that modifications to his computers which transmit teletext information were complete. 'The BBC end is ready to start broadcasting when we want,' he said.

Software available will be educationally-biased, with 50 programs coming from the Microelectronics Education Programme and eight from Brighton Polytechnic. It will be changed fortnightly at first, but this frequency will be increased as the number of users grows.

Brighton Polytechnic took

part in the earliest telesoftware projects and is undertaking research to assess its value in education.

A third source of software is the general public. 'People are already sending in a steady trickle of listings,' said Graham Clayton. 'We are negotiating a very small payment and have produced guidelines for writers.'

However, the main problem is still the BBC's inability to pay commercial rates for telesoftware as it is unable to charge users.

## Memory back-up

A BACK-UP memory device should now be available for the BBC micro. Greenwich Instruments have developed an adaptor for their NVR64, to store the Beeb's memory once the power is switched off.

The adaptor plugs into the 1MHz extension bus and will be available with the necessary software from late February costing about £25. The NVR64 itself costs £375.

The device has 64k of usable memory, protected by an internal lithium power system for up to 10 years. The manufacturers claim it is exceptionally fast - programs load and save in a fraction of a second - and due to the absence of moving parts, is suited to hostile environments.

Contact Greenwich Instruments at 22 Bardsley Lane, Greenwich, London SE10 9RF. Tel: (01) 853 0868.

## Reject call

DO YOU have something in common with Einstein, Winston Churchill, Puccini, Rudyard Kipling, Jimmy Young or Margaret Thatcher? They have all been rejected at some time or other.

If you have any funny, cruel, kind or eccentric rejection letters, Peter Knight wants to use them in a book of rejection stories.

He'll be offering a bottle of champagne for the best entry - you should send your stories to: Peter Knight, (Acorn User), FREEPOST, London SW6 5BR.

## Digit-a-pic

THE Digitiser System, for the BBC model B, can reproduce pictures and diagrams or can be used to produce original designs. The user traces a picture and the co-ordinates are stored in the computer.

The digitiser costs £98, with a joystick an additional £48.95, both plus £4 postage and packing and VAT. Further details from B.S. Dollamore, Burton Road, Castle Gresley, Burton-on-Trent, DE11 9HA. Tel: (0283) 217905.

## Shop clubs

A Manchester-based software company, is starting its own users club.

It costs £5 a year to join, and members are entitled to discounts of up to 30% on tapes. There will also be a bi-monthly newsletter. Details from: Micro-Link at 830, Hyde Road, Gorton, Manchester M18 7JD.



## Smiling beauty prize

WE couldn't resist holding a little 'balloon' competition about these two smiling beauties. They are (left) Chris Curry, joint managing director of Acorn and David Allen, produce of BBC TV's *Making the Most of the Micro*. What do you think they're thinking or saying? A prize of software to the value of £20 is offered for the best balloons. Entries on a postcard please, addressed to *Acorn User* and marked 'GRIN'.

## TV robot link to micro

THE Buggy shown in the BBC's latest computer series is soon to go on sale.

This vehicle is designed to be controlled from the Beeb, and software will be provided to enable it to perform a variety of tasks, from following lights to mapping out boundaries.

It is about five inches

square by five inches high and runs on three wheels driven by two stepper motors.

Economatics, who make the device, say it will cost about £125, including 13 programs, and will be available in April. It comes in an 'easily assembled' kit form and has collision and

light detectors.

A pen operating system is planned, to enable the Buggy to be linked up to Logo packages and used as a turtle. The NEC course 'Interfacing and control systems' will include a teaching board to drive the Buggy.

Details from: Economatics Education Division, 4 Orgrave Crescent, Dore House Industrial Estate, Handsworth, Sheffield S13 9NO.

# WATFORD ELECTRONICS

DEPT BBC, CARDIFF ROAD, WATFORD, Herts, England  
Tel Watford (0923) 40588. Telex: 8956095

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. Carriage: unless stated otherwise, please add min. 50p to all cash orders. **VAT** APPLICABLE TO UK CUSTOMERS ONLY. ALL PRICES EXCLUSIVE OF VAT. PLEASE ADD 15% VAT TO THE TOTAL COST INCLUDING POSTAGE. SHOP HOURS: 9.00am TO 5.00pm MONDAY TO SATURDAY. AMPLE FREE CAR PARKING. ACCESS ORDERS: Simply telephone through your order on Watford 50234/40589.

## BBC MICROCOMPUTER

### Model B £399

(carr £7)


UPGRADE KITS. Upgrade your Model A to Mod. 8 with our Upgrade Kits and save yourself £ s s . . . . .

- BBC1 16K Memory (8 x 4816AP-3 100nS) £18.00
- BBC2 Printer User I/O Port £6.98
- BBC3 Disk interface Kit £65.00
- BBC4 Analogue I/O Kit £6.40
- BBC5 Serial I/O Kit £6.70
- BBC6 Expansion Bus Kit £6.10
- Printer Cable Ready made 36" £11.95
- Complete Upgrade Kit Mod. A to Mod. B £43.00

Complete range of Connectors & Cables available for BBC Micro. Send SAE for list.


## DISC DRIVES

'TEAC' 88C Compatible

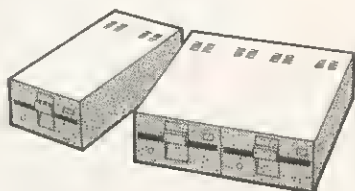

- FD50A - Uncased, Single sided, 40 track, 5 1/4", 100K £125
- FD50A - Cased, Single sided, 40 track, 5 1/4", 100K £150
- FD50A - Cased with own Power Supply, S/S 40 track, 5 1/4", 100K £180
- FD50A - Twin Cased with own PSU, Single sided, 40 track, 5 1/4", 200K £350
- FD50E - Single case with own PSU, Single Sided, 80 track, 5 1/4", 200K £250
- FD50E - Twin cased with own PSU, Single sided, 80 track, 5 1/4", 400K £475
- FD50F - Twin cased with own PSU, Double sided, 80 track, 5 1/4", 800K £725
- Single Drive Cable for BBC Micro £8
- Twin Drive Cable for BBC Micro £12
- 10 Verbatim Diskettes, 5 1/4", S/sided £18
- 10 Verbatim Diskettes, 5 1/4", D/Sided £30

## ACORN AP100A PRINTER

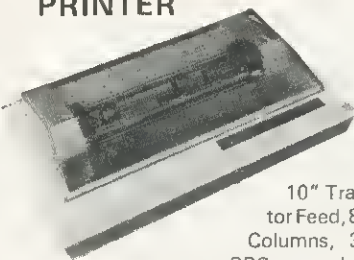

10" Tractor Feed, 80 Columns, 30 CPS normal & double width

Characters. Dot res graphics  
Parallel Interface Standard.


Our price includes

**FREE 500 SHEETS** of PAPER

Only **£175** (£7 carr)

- **SEIKOSHA GP250X** 10" Tractor Feed, 80 col. 50 CPS, normal & double width & height characters, RS232 & Centronics Interfaces standard. **£235** (£7 carr)
- **PRINTER CABLE** to Interface above printers to 88C Micro **£11**


## NEC PC8023BE-C

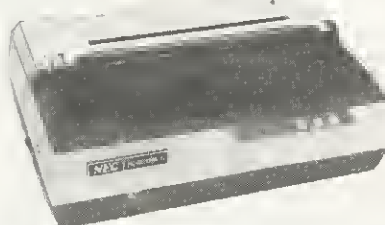

100 CPS, Bi-directional, logic seeking, 80 columns, 7 x 9 Dot matrix, superscript & subscript, hi-res block graphics, underlining, true descenders, Tractor/Friction feed, Reverse linefeed, 2K 8uffer, proportional spacing, attractively finished **£320** (£7 carr)

Interface Cable for BBC Micro **£12**

## EPSON



**FREE 500 SHEETS**

### MX80FT/3

10" Tractor & Friction feed, 9 x 9 matrix, 80 col., speed 80 cps, Bi-directional, hi-res bit image graphics. Subscript & superscript, Italics & underlining. Only **£324** (£7 carr)

Printer Interface Cable for BBC **£12**

### MX100FT/3

15" Carriage, 136 columns, plus all the facilities of MX80FT/3 Only **£425** (£7 carr)


## LISTING PAPER

8 1/2" or 9 1/2" Fanfold paper plain or ruled (1000 sheets) **£7** (150p carr)

15" fanfold paper (1000 sheets) **£9** (150p carr)

Teletypewriter Roll (econo paper) **£3** (150p carr)

## MONITORS



**MICROVITEC 1431.** 14" Colour Monitor. RGB Input. (as used in BBC Prog.) Price including connecting Lead **£249.95** (carr £7)

**ZENITH 12"** Green Monitor. Excellent res. **£80** (carr £7)

## CASSETTE RECORDER & ACC.

Top quality Sanyo Slim-line, portable Cassette Recorder. Ideal for Computer use. Mains/Battery operated. **£24** (carr £1)  
C12 Computer Grade Cassettes in library cases **40p**

## STAK-PAK

The unique computer program filing and storage system. Made of tough black plastic these compact drawer sections hold two cassettes each and lock together vertically to form miniature cabinets of any height. Each drawer section has two Agfa C12 Cassettes with labels plus external index card. Five twin Paks (£10 Cassettes) **£6.00**



## READY-MADE LEADS for BBC

CASSETTE LEADS: 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug **£2.00**  
to 3 pin DIN Plug + 1 Jack Plug **£2.00**  
to 7 pin DIN Plug **£2.50**  
to 3 pin Jack Plug **£2.00**

6 pin DIN to 6 pin DIN Plug (RGB) **£2.50**

## RIBBON CABLE LEADS 36" long

(Female Plug at one end, other end free)

SK9 Printer Cable (26 way Female) **£2.75**  
SK10 I/O cable (20 way Female) **£2.00**  
SK11 1MHz Bus Cable (34 way Female) **£3.20**  
SK12 Tube Cable (40 way Female) **£3.70**

## PRINTER LEAD 36" Ready made

Single DISC DRIVE Cable **£8**  
Twin DISC DRIVE Cable **£12**

## MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 pin DIN)	30p	45p
RS423 (5 pin Domino)	30p	40p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	15p	25p
Paddles (15 pin 'D')	£1.10	£2.15

## IDC MALE Headers

to fit BBC PC Board

2 x 10 way (20 pin User Port) **£1.00**  
2 x 13 way (26 pin Printer Port) **£2.00**  
2 x 17 way (34 pin DISC Intr) **£2.35**  
2 x 17 way (34 pin 1MHz Bus) **£2.35**  
2 x 20 way (40 pin Tube) **£2.50**

## Official JOYSTICKS

£11.50/pr



## Acorn ATOM UTILITY ROM

WEROM is Watford Electronic's own most sophisticated but easy to use 4K ROM based on BASIC extension for Acorn ATOM. Plugs straight into the utility socket in an ATOM with floating point. The special features are:

High Speed Tape Interface - Memory Dump, Modify Machine code breakpoints - BASIC Error Trapping - READ, DATA and RESTORE - Full BASIC Keyboard Scanner (BBC like) - FULL Disassembler - AUTO Line Numbering - PLUS: CHAIN, Cursor Movement, Loop Aborting - Easily Extendable further. Supplied complete with instructions.

Special Introductory Offer: **£9.95**

## BBC WORDPROCESSOR PACKAGE

We offer a complete BBC Wordprocessor package consisting of:

**BBC Model 'B',** Single TEAK Disc Drive (Twin Disc Drives optional) **EPSON MX80FT3 PRINTER** (Daisywheel Printer optional), **ZENITH Hi-Res Green 12" Monitor** (Microvitec 1431 Colour Monitor optional), A packet of 10 Diskettes, 1000 Sheets Fanfold paper, **WORDWISE** (the most sophisticated ROM Based BBC Word Processing software yet written), all the connectors, Cables, Manuals etc supplied. All you require is a mains outlet to have it up and running.

For further details phone Martin on Watford (0923) 40588/50234

For BBC SOFTWARE and BOOKS see our advert on Page 60 of this magazine.



## Subscription changes

SUBSCRIPTIONS to *Acorn User* will, from the April issue, be handed by Brown, Knight and Truscott Ltd.

Their address and phone number are given on page one, and they will deal with subscription and back number enquiries from now on.


A new service they offer is the ability to arrange subscriptions by credit card over the phone.

Details of back issues, a photocopy service and the arrangements for subscriptions are given on page 89.

## Hidden message

SOMEWHERE in this magazine is a hidden message. We're not giving away any clues, but there's a year's free subscription awaiting the first person to find it.

Send your answer on a postcard, which must be posted, and we will not accept answers by phone. So there!

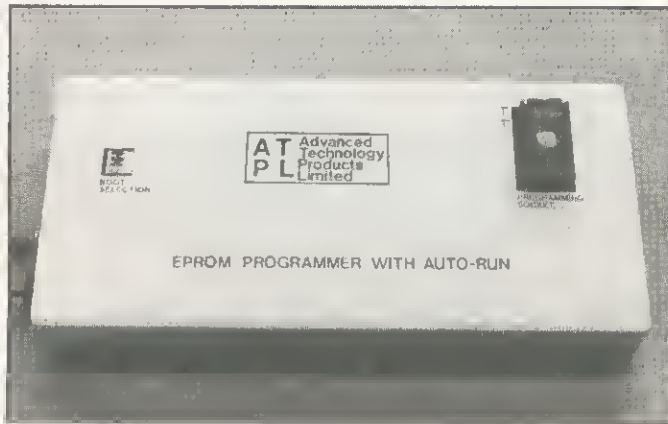

## Autoprommer

THIS little box can not only blow EPROMs, but also run programs automatically on the Beeb.

Data files can be loaded from and dumped to cassette for all operating systems up to 1.2. It runs on 25 or 21 volts and takes power from the Beeb. The price is £120 plus VAT and postage. Details from ATPL, Station Rd, Clowne S43 4AB.

## NEC to launch micro courses

THREE new computer correspondence courses are to be released by the National Extension College.

The first two - 'Structured programming in Basic' and '6502 assembly language programming' will cost £50 and be available this year. The third, 'Interfacing and control systems' is not yet accepting enrolments.

All the courses are based around the BBC micro, but

will be applicable to other machines. Books of the courses will be jointly published with the BBC.

The NEC is now claiming over 100,000 users for its original course '30-Hour Basic' released as part of the BBC's Computer Literacy Project. It has also arranged for the City and Guilds of London Institute to offer a certificate in computer literacy.

Some people have critic-

ised '30-Hour Basic' because it was not specific enough, although this was mainly caused by a lack of BBC micros when the course was written. This problem, graphically described by Richard Freeman in September's *Acorn User*, has now been overcome as there are now more than 50,000 Beebs about.

Details of courses from: NEC, 18 Brooklands Avenue, Cambridge CB2 2HN.

## BITS & BYTES

44 Fore St. Ilfracombe, Nth Devon. Tel: (0271) 62801

### ACORN DEALERS, BBC, DRAGON, VIDEO GENIE SALES & SERVICE EPSON HX20 COMPUTER

Atom Micros	BBC Upgrade Kits
Colour Monitors	BBC printer interfaces
Seikosha GP100A Printers	5¼" Floppy Discs
Epson Printers	C-12 Cassette Tapes
Monitors - 12" B/W	Cassette Recorders
Monitors - 12" Green	Continuous Stationery Software
5¼" Disc Drives (C/W P.S.U. & CASE)	Software written to order

## REPAIRS & SERVICE

To all Micros

**In stock NOW!**

**BUY THE BEST BRITISH COMPUTER**

Model A ←  
£299

Model B ←  
£399

As supplied to schools, local authorities and government departments by the leading BBC/Acorn dealer & service centre

**We supply all the extras:**

Floppy disk interface + Econel network interface + voice synthesis circuits + Cartridge ROM pack interface + Alternative high-level languages in ROM + Paddles + Cassette recorders + Black & white or colour monitors + 100K single-sided disk drive + 800K double-sided disk drive + Dot matrix printer + Daisy wheel printer + Teletext or Prestel acquisition units

PLUS computers, peripherals, printers, software, games, books and much, much more from leading makers at low prices - always available from your local stockist:

**TWICKENHAM COMPUTER CENTRE LTD**

72 Heath Rd Twickenham Middx TW1 4BW (01-882 7886/01-891 1612)

ACORN OFFICIAL STOCKISTS



# IJK

## the one to watch

### MODEL A/B

Cassette 1: Star Trek/Candy Floss (very popular) **£6.50**

Cassette 2: Family Games (hours of fun) **£4.50**

Cassette 3: Mutant Invaders/Breakout **£6.50**

Cassette 8: Model A Invaders (M/C) **£5.50**

### MODEL B (or A+32K)

Cassette 4: Beep-Beep (Super Simon Game) **£4.50**

Cassette 5: Beebmunch (full colour Munchman) **£6.50**

Cassette 6: Super Hangman (animated, educational) **£4.50**

Cassette 7: 3D Maze (fast and intricate) **£4.50**

### CASSETTE 9

MODEL B Invaders (or A+32K) (M/C) **£7.50**

### CASSETTE 10

WORDPRO. (Cassette W.P. system). **£10.50**

### CASSETTE 12

FLAGS. (Countries and Capitals). **£4.50**

### CASSETTE 13

HYPERDRIVE (M/C arcade). Destroy the Drone aliens in the caverns with your laser tank. **£6.50**

### CASSETTE 14

STRATOBOMBER (M/C arcade). Keep the enemy fleet at bay in order to destroy the rogue star ships nuclear reactor. **£7.50**

### CASSETTE 15 - LEAP FROG

The fabulous "frogger" arcade game reaches the BBC micro. Superbly written full colour machine code version for the Model B (or A+32K). Help the frog cross the road avoiding the vehicles travelling at different speeds, and cross the multi current river to reach the safety of the lily pads. The game gets progressively harder - perfect for arcade addicts

**Only £7.50 for MODEL B (or A+32K)**

### CASSETTE 11

ATLANTIS - The superb fast action arcade game written in machine code to illustrate to the full the machines fantastic colour graphics and capabilities. This game includes all the usual ATLANTIS/SCRAMBLE features. Guide your submarine Nautilus along the undersea landscape and through the caverns avoiding mines, chain charges, rockets, jelly fish, serpents etc.

**Only £7.50 for MODEL B (or A+32K)**

# BBC MICRO GAMES



ATLANTIS

- All Programs will run on all operating systems
- All software in stock before we advertise
- Send SAE for Brochure



LEAP FROG

PRICE FULLY INCLUSIVE  
OF P.V. AND P.P.P.  
NO MORE TO PAY

# IJK

# Software Limited

9 King Street, Blackpool, Lancashire  
**(0253) 21555**

24 HOUR  
ANSWERPHONE  
48 hour despatch





# SPINNING

by David Allen,  
BBC producer

**M**ost of the programmes in *Making the Most of the Micro* have now been shown, so this is a useful time to look at the software and hardware which is likely to be produced to support the series.

In programme one, 'The versatile machine', we see a number of demonstration programs. One of these helps to explain how data gets from tape into the computer's memory when a program is loaded. It was written by Ian Trackman and will probably be released by BBC Publications.

The sound monitoring program and the pressure pad weighting-machine software (written by BBC engineers Steve Lowry and John Mitchell) may also be available.

The BBC micro is used throughout the series to produce the closing superimposed credits, subtitles and names. This technique could be used on home videos.

'Getting down to Basic' is the first programme to show any coding. Although quite simple, programs have been written to show good practice and it is likely these will appear on Ceefax.

**A**t the end of the programme we see programs written for schools by the Microelectronics Education Programme, as well as one from the *Welcome* tape. The two MEP programs will be transmitted free to viewers who have teletext decoders attached to their BBC micros.

'Strings and Things', programme three, looks at how the computer handles words and demonstrates a word processor.

We also look at procedures and structured programming. Ian Trackman demonstrates a patience-playing program with excellent graphics, and a couple of programs which play a dice game. One of these has been 'well' written, and shows the principles of good structure; the other is a 'bad' program with poor screen display, and poor error trapping.



*The BBC Buggy in action. This small robot can negotiate mazes, follow lights and draw pictures. It should soon be linked to a Logo language, and may be used in an NEC course on control.*

*The TV picture on the left was set up using a technique developed by BBC engineers which has obvious possibilities for home video.*

# GETTING OFF FROM THE MICRO



For those who want to learn more about structured programming there is a second National Extension College course coming up called 'Structured Programming on the BBC Microcomputer'.

Programme five, 'Keeping a Record', helps to demystify databases and shows a simple friendly home database or 'record keeper' written by Ian Trackman.

We also see the BBC machine interrogating the *New York Times* database using software written by John Coll at Acorn. This converts the BBC machine into a 'smart terminal' and enables you to use the telephone to communicate with any mainframe computer capable of reading ASCII code.

Programme six is about business applications. It contains a demonstration of *UltraCalc* - a spreadsheet program similar to *Visicalc*. This software is important because it enables the small

businessman to produce a financial model of his business.

Music, speech and 'intelligence' make up programme seven. This shows software which converts the BBC machine into a music synthesiser and demonstrates the musical equivalent of the word-processor - a music editor which enables you to create music, display it in 'proper' notation and then play it back, with harmony.

The speech chip - immortalising the voice of Kenneth Kendall - is shown in action, and this is now available for the BBC machine.

**C**ontrol is the subject of programme eight. In this we show how various simple sensing devices can be interfaced to the BBC machine and how it can control mains operated devices.

We also show the BBC buggy, a wheeled vehicle which is controlled

by the computer. It has a pair of precision stepping motors, a light sensor, a macro barcode reader, an electromagnetically operated pen and two touch sensors.

Software is being written which should enable the buggy to, for example, map out its environment or find its way out of a maze as well as follow a light, negotiate its way round objects and follow bar-coded instructions.

Programme nine takes a second look at graphics, and various techniques such as 'colour switched' animation effects are demonstrated as well as the use of lightpens and graphics tablets.

Programme 10 deals with communications. We look at the use of the machine with the telephone and networking 'linking machines so they can communicate and share peripherals, a subject you will be hearing a lot more about.

## BBC COMPUTER-EPROM PROGRAMMER WITH AUTO-RUN FACILITY

### FEATURES

**COMPREHENSIVE** eprom programmer for 24/28 pin packages 2516/2716/2532/2732/2564/2764/27128/27256.

**AUTOMATICALLY RUNS** a user programme on power-up or pressing BREAK.

**EASY CONNECTION** with BBC via 1MHz bus interface.

**PROGRAMME RUNS** on BBC models A and B.

**FULLY AUTOMATIC** configuration for all eproms.

**EASY USE** with full operator prompting.

**BBC AND MICROCOMPUTER**

**COMPLETE** with C10 cassette containing programme, cables, software listings and full explanatory manual.

Model A's may require a 34 way connector fitting onto the 1MHz bus.

**VERSION ALSO AVAILABLE FOR USE ON ACORN ATOM, SYSTEM 3, SYSTEM 4.**

**BLOW YOUR FAVOURITE PROGRAMME ONTO EPROM AND AUTO-RUN ON RESET**

COMPLETE BOXED UNIT

for only **£120** + VAT INCL. P & P

**DISCOUNTS AVAILABLE** for Schools, Colleges & Clubs. Trade enquiries welcome

Send cheque for order to:



**Advanced Technology Products Limited**

Station Road, Clowne, Chesterfield S43 4AB



For further details send a stamped self addressed envelope to the address above.

Please allow 28 days for delivery.



Come to

# MICROAGE for sensational value packages\*

## ELECTRONICS

**\* BBC + Disk Interface, 800k Disk Drive, Word Processing ROM, Epson Printer, Dust covers for all units, Basic Programming Book, Cassette lead, Paper & Cable.**  
 Normal Price £1748.80  
**Our Price £1599.00**  
 Saving £149.80 **FREE COURIER**

### BBC MACHINES

Model A, 32K RAM & 6522 Chip	£329.00
Model B	£399.00
Model B + Disk Interface	£494.00
BBC Dust Covers	£3.95
BBC Compatible Single Disk Drive* (100K)	£235.00
BBC Compatible Dual Disk Drive* (200K)	£389.00
BBC Dual Slimline Disk Drive* (Double Sided & Density B00K)	£799.00
Verbatim Single Sided Diskettes 10 for	£22.50
Verbatim Double Sided Diskettes 10 for	£39.95
Let us fit a disk interface in 24hrs	£95.00
Second processor Z80	£195.00
Teletext receiver	£225.00
RH Electronics colour light pen	£37.00

### BBC MONITORS

14" RGB Microvitec Colour Monitor (as used in the BBC Computer Prog.) Including lead	£284.00
Microvitec High Res. Colour Monitor	£575.00
12" Zenith High Res. Green screen Monitor	£95.00
BNC Cable for above	£4.95
BBC Compatible Cassette Player price on application	
Blank Data Cassettes 10 for	£3.50
	+ £1.30 p&p
DIN to Jack Lead	£2.00
	+ 75p p&p
Official Joysticks per pair	£13.00
	+ £1.30 p&p

\*All Drives include manual and utility Disk.

All items subject to availability.

All the products are the official versions, beware of imitations, they will invalidate your guarantee.



We accept official orders from educational establishments, - send large S.A.E. for lists and info pack.

Credit card holders can phone in for express despatch.

### ACORNSOFT FOR BBC

Snapper, Planetoid, Monsters, Rocket Raid, Philosophers Quest, Sphinx Adventure, Arcadians, Lisp Cassette, Peeko Computer, Creative Graphics Tape, Graphs and Charts Tape, Desk Diary, Arcade Action, View (on ROM) and Printer Drive Cassette.

All Acornsoft at £9.95 each, except Arcade Action (£11.90), Lisp (£16.85), View and Printer Drive (£69.90), Wordwise word Processing ROM (£46.00) + £2.00 p+p.  
 Only a selection of Acornsoft available.

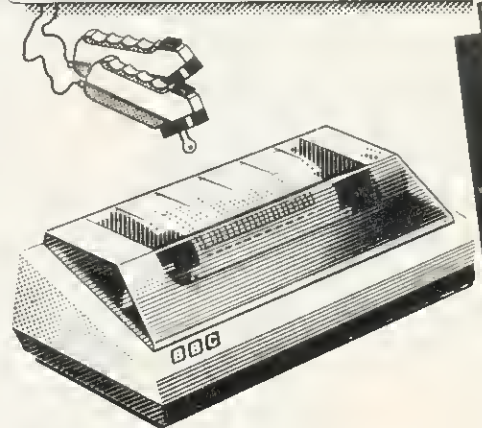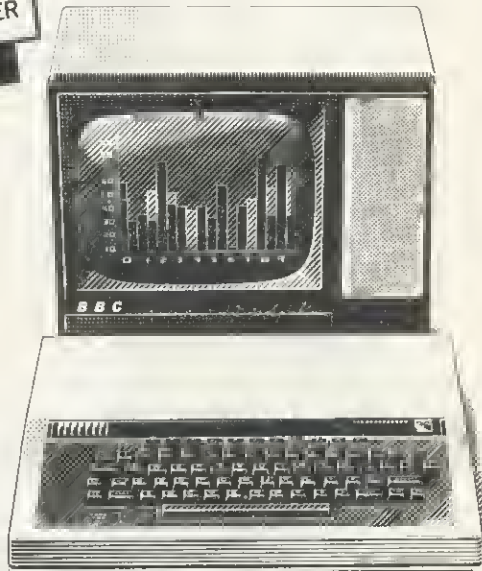

BBC compact, slimline Disk Drive.

### BOOKS

Practical Programs for BBC & Atom	£5.95
BASIC Programming on the BBC Micro	£5.95
Assembly language programming for BBC	£8.95
BBC Micro Revealed	£7.95
Creative Graphics, Graphs & Charts, LISP	all at £7.50 each
30hr. BASIC	£5.95
Let your BBC Micro teach you to program	£6.45

**\* 8BC Model 'B' wordprocessing pack at a low price of only £699. Save £44. Normal price £743. The Pack consists of: BBC Model 'B' GP100 Printer Cables, Cassette Player Word Processing ROM 1,000 sheets of paper. Then add the GP100A Printer at only £215. The lowest price ever.**  
**FREE COURIER**

### PRINTERS

See advertisement opposite for full details	
Acorn AP-B0A now down to	£189.00
Acorn AP-100A now down to	£215.00
AP-B0A Ribbons	£4.95
AP-100A Ribbons	£5.95
Epson MX-80 F/T 111 (new model, Dot matrix High res. graphics, B0 or 132 chars. per line)	£390.00
All printers include cable & paper	
Epson Dust Cover	£3.95
	+ 75p p&p
Parallel printer cable	£15.00

### POSTAGE RATES

Small items such as Ribbon, books & software:- 1 item £1.00, 2 items or more All Dust Covers £1.00 p&p 50p per unit

### BY COURIER TO YOUR DOOR

Large items such as Computers, Disk Drives & Monitors:- 1 item £7 2 items £10 3 or more £13

### ATTENTION!!

All Linx, Oric, BBC, Commodore 64 owners, we pay top royalties for quality software programs. Please write or phone for details.

Barclaycard and Access welcomed All prices include VAT



**ALL PRICES INCLUDE VAT. FOR FURTHER DETAILS AND MAIL ORDER LIST SEND LARGE S.A.E.**  
**Open Mon - Sat 9.15am - 6.00pm. Thurs 9.15am - 1.00pm.**

**MICROAGE ELECTRONICS**  
 135 HALE LANE EDGWARE MIDDLESEX HA8 9QP  
 TEL: 01-959 7119 TELEX 881 3241

John Vaux set three programs for the Beeb against each other – and a dedicated chess machine

# MICRO TAKES ON CHESS MACHINE

This is a review of three chess programs for the model B BBC micro. As an interesting comparison, one of the dedicated chess machines has been included in the test. The review looks at how well the programs play chess from various aspects of this complex game.

The three programs are from Program Power (abbreviated to PP), Bug-Byte (BB) and Computer Concepts (CC). The chess machine is the Mini Sensory Challenger (MSC). The programs loaded from the tape with no trouble except that the BB program is called 'BEEBCHESS' on the tape and 'CHESS' in the instructions. Documentation in all cases gave adequate information about all the facilities, although presentation ranged from a glossy booklet with the MSC to duplicated pages with PP and CC.

The facilities provided are wide ranging, with CC having the most (four typed pages of them). CC is the only program which uses the function keys. All provide various levels of play which can be changed at any time. All allow the setting up of a position for problem solving. Additional features include saving and reloading of a game printing a list of moves made, playing 'Blitz' (provided by PP – you move in 10 seconds or you miss your move!), changing the colour of the board and pieces (provided by CC), to name a few.

The CC display is the clearest. PP is reasonable but the difference between the pieces is not great. BB shows quite clear pieces but the relative sizes can be confusing (for instance, the pawns are bigger than the king). MSC of course does not have a display but uses actual pieces. Although these are small and fiddly they are quite easy to differentiate.

Clock display: BB has no clock, PP shows time taken for your moves only, CC has a clock for both sides.

CC can be set to play computer against computer, computer against human or human against human (in the last case it monitors for legal moves). At any time that it is a human's move CC can be asked to suggest a move.

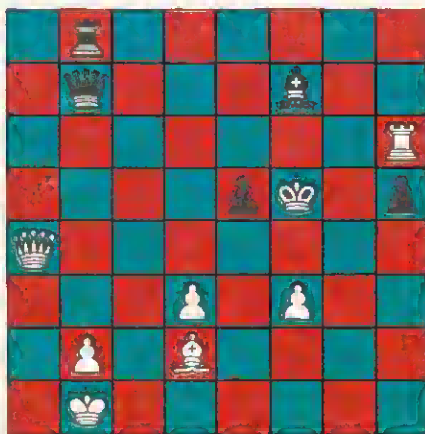


Figure 1. White to move

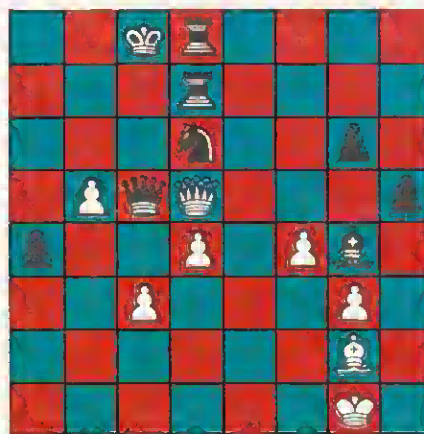


Figure 2. White to move

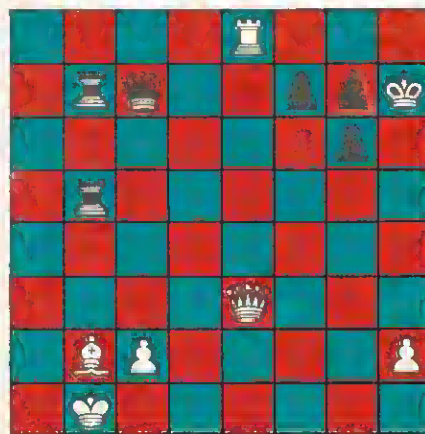


Figure 3. White to move

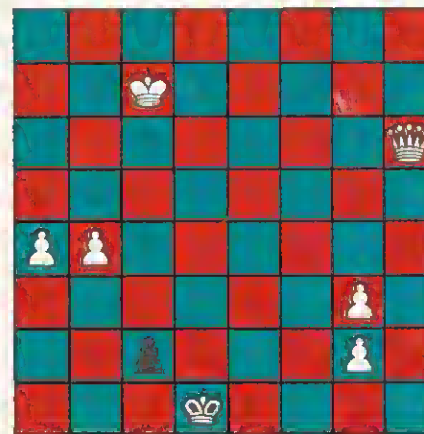


Figure 4. White to move

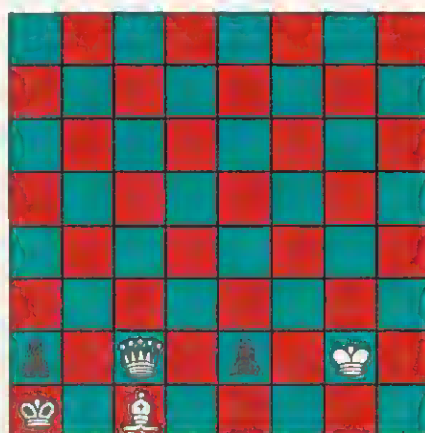


Figure 5. Black to move

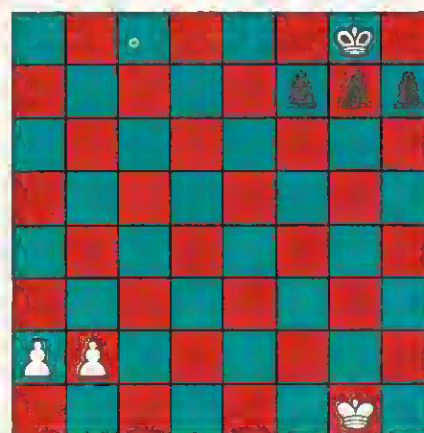


Figure 6. White to move



**N**ow we come to levels of play. MSC has four, one being the fastest and four being very slow. PP has six levels indicating the number of half-moves or 'ply' searched. Thus a mate in two is three ply (white-black-white-mate). BB has main levels up to nine indicating ply and sub-levels up to 99 indicating the number of moves tried at each level. CC has no less than four different level settings.

These are called level, care, sublevel and speed, but these names do not really describe what they mean. All these settings provided by CC may be fun for the experimenter but are too complex for the average user.

Expensive chess machines have the more common standard opening move sequences stored in memory. For the first moves of these stored openings they do not need to 'think' and so move immediately whichever level they are playing at. None of the programs under review have this facility, although a plug-in module of openings is available as an optional extra for the MSC machine.

PP, CC and MSC playing white all prefer D2-D4 or E2-E4, apparently choosing randomly between them. BB preferred knight opening B1-C3 or G1-F3.

Playing black, PP, CC and MSC respond with sound moves. BB is

less reliable and sometimes plays peculiar moves in the early stages. On one occasion BB's first move was G8-F6, it's second move F6-G8 and so after two moves it was back where it started!

Space does not permit me to go in detail into how well each program handled the opening moves, but BB was generally the least sound.

A good way to test chess programs is to give them set problem positions to solve, and there are many books from which such problems can be obtained.

**S**ome are specifically designed to demonstrate the limitations of chess computers. Problems for this review were extracted from books listed at the end of this article. Illustrations of some of the positions are included so that you can try them on your chess machine or program to see how they compare with those in this review.

Each program was given nine mate-in-two (ie three-ply) problems. PP was found to be particularly good at these and correctly solved every one on level three, times being from 10 seconds to eight minutes. Having moved, it displays 'mate in one' to show that it recognises the fact. None of the others approached PP's mate-in-

two performance, CC and MSC getting four correct and BB five.

Figure 1 shows an example they all succeeded on, times being: PP (on level three) 25 seconds, BB (on 3.99) six minutes, CC (on 3,0,0,4) 22 seconds and MSC (on level three) 55 seconds. The solution is: A4-E4 check, B7xE4; D3xE4 mate. Figure 2 shows an example that only PP solved in two minutes, BB (3.99) wrong in five minutes, CC (3,0,9,9) wrong in 18 seconds and MSC (3) wrong in one minute. The solution is: D5-A8 check, C8-C7; A8-B7 mate.

PP was so good at mate-in-two, it was put up to level five and given a couple of mate-in-three (five ply) problems to tackle. At this level you need something else to do while waiting. It 'beeps' when it has made it's move. PP solved both, one in 49 minutes the other in nearly three hours. Figure 3 shows the first one - see how well your chess program does! The solution is: E8-H8 check, H7xH8; E3-H6 check, H8-G8; H6xG7 mate.

I was impressed at how well PP handled these problems and surprised at the performance of the others. I would have expected any program claiming to be good to consistently solve mate-in-two situations even if for instance the first move is a queen sacrifice.



However, there were some situations which PP couldn't solve. Figure 4 shows a problem that was only solved correctly by BB. The others did not realise that it is OK to let black promote his pawn to a queen and then exchange queens resulting in a winning position with four pawns against nothing. They kept checking with the queen to prevent the promotion taking place!

Figure 5 shows a situation where a win is obtained immediately by promoting the pawn not to a queen but a knight. BB is apparently the only one that is capable of under-promoting a pawn. Later it was discovered that when it is your pawn being promoted BB asks what piece you want to promote to. The others all assume you want a queen.

**C**omputer chess programs are reasonably good at the opening game and come into their own in the middle game in that unlike human players in complex situations they rarely make mistakes. On the other hand, they do not have sudden flashes of inspiration and see combinations beyond their normal horizon of searching. In the end game, the look ahead required usually increases considerably – especially with respect to pawns racing with kings to promotion. Figure 6 is an example of this. If

white advances his A-pawn, the black king cannot reach it in time to prevent it promoting. BB handled this correctly at level 4.99 in 24 seconds. CC was correct on level 6,0,5,9, in five minutes. PP got it wrong at it's top level and MSC was also unable to solve it.

Only one BBC micro was available so I could not get the chess programs playing each other, but I did play each program against the MSC machine. Playing at level two, results were as follows:

**MSC v PP.** Three games played – PP won one, one was drawn by MSC obtaining a stalemate while PP was ahead on material, the other game was abandoned about equal when MSC tried to make an illegal move (maybe this was due to a mistake by me when transferring the moves from one to the other).

**MSC v CC.** Three games played – MSC won all three.

**MSC v BB.** Two games played – MSC won both.

**T**hese games took from about half an hour to an hour and a half each. As PP was the only program to beat MSC, two games were played between them at level three. One game was won by MSC in about two hours. In the other game PP won the queen but failed to build on its advantage and the game just drifted on aimlessly. It was

abandoned on move 27 after two hours 40 minutes.

I was generally somewhat disappointed in the performance of all these programs. During tests, all occasionally made stupid moves so I do not think they would be good enough for the above average chess player. They could all give the less strong player a reasonable game at level two (each move taking about a minute) and a stronger game at level three (moves taking around three to five minutes). The MSC machine (£50) is no stronger than these chess programs. It is apparent that the strong player would need one of the expensive machines (£100 plus) to really challenge him.

Of the programs PP is the strongest – and also the cheapest at £7.95. CC has the best display and the most facilities (£10). BB has it's moments but is the least desirable of the three (£11.50).

Thanks to Ray Hodges Associates of Maidenhead for the loan of the MSC machine, to Program Power and Computer Concepts for the loan of their programs. The Bug-Byte program was purchased.

The problems were taken from: *How to get the most from your chess computer* by Julio Kaplan; *The Computer Chess book* by T.D. Harding; *Rate your own chess* by F. Donald Bloss.





# THE PROGRAM THAT'S LEAPS AHEAD OF ALL THE REST...



©1983

FROM SOFTWARE FOR ALL

## THE MOST FANTASTIC ACTION GAME FOR THE BBC MICRO!

FAST ARCADE PLAY!  
MODE 2 COLOUR GRAPHICS  
AT ITS BEST!  
FIVE TUNES!  
INCREDIBLY ADDICTIVE!

AVAILABLE NOW  
AT YOUR SOFTWARE  
FOR ALL DEALER

# ONLY £8.95

### SEE IT NOW AT YOUR NEAREST SOFTWARE FOR ALL DEALER!

#### A B & C COMPUTERS

11 Brockstone Road  
St. Austell

Cornwall PL25 30W

Tel. 0726 64463

#### BLADEN COMPUTER SYSTEMS

22 Glynne Street  
Farnworth, Bolton  
Lancs BL4 4DY

Tel. 0204 794226

#### BYTEWARE LTD.

Unit 25  
Handyside Arcade  
Newcastle On Tyne

Tel. 0632 617111

#### CARLTON COMPUTERS LTD.

4 Swanstons Road  
G1 Yarmouth

Norfolk NR30 3NQ

Tel. 0493 58898

#### COMPUTERS FOR ALL

72 North Street  
Romford, Essex

Tel: 0708 752862

#### COMPUTER PLUS

47 Queens Road  
Wattford

Herts WD1 2LH

Tel: 0923 33927

#### ESSEX COMPUTER CENTRE LTD.

150 Moulsham Street  
Chelmsford, Essex

Tel: 0245 358702/87959

#### FAREHAM COMPUTER CENTRE

56 High Street  
Fareham, Hants

Tel: 0329 239191

#### GAMES WORKSHOP

1 Oalling Road  
Hammersmith, London W6

Tel: 01-741 3445

#### GAMES WORKSHOP

162 Marsden Way  
Arndale Centre  
Manchester

Tel: 061-832 6863

#### GAMES WORKSHOP

Unit 37  
Birmingham Shopping Centre  
Birmingham B2

Tel: 021-632 4804

#### GAMES WORKSHOP

95 The Moor, Sheffield

Tel: 0742 750114

#### MANSFIELD COMPUTERS & ELEC

79 Ratcliffe Gate Mansfield  
Notts, NG18 2JB

Tel: 0623 31202

#### MICROSTYLE

29 Belvedere  
Lansdown Road, Bath

Tel: 0225 319705

#### RAM ELECTRONICS

106 Fleet Road  
Fleet, Hants, GU13 8PA

Tel: 02514 5858

#### ROS ELECTRICAL LTD.

157-161 Kingston Road  
Portsmouth

Hants PO2 7EF

Tel: 0705 812478

#### R. M. K. ELECTRONICS LTD.

Hinton House, Station Road  
New Milton

Hants, BH23 6HZ

Tel: 0425 616110

#### STORKROSE LTD.

44 Shroton Street  
London NW1

Tel: 01-258 0409

#### SUPERIOR SYSTEMS LTD.

178 West Street  
Sheffield

South Yorkshire, S1 4ET

Tel: 0742 755005

#### TECHNOMATIC LTD.

17 Burnley Road  
London NW10

Tel: 01-450 1500

#### WATFORD ELECTRONICS

33-35 Cardliff Road  
Watford

Herts WD1 8EQ

Tel: 0923 40568

Distributor for Holland,  
Belgium & Luxembourg

#### AACKOSOFT

Postbus 3111  
2301 OC Leiden

Tel: 01880 11446



*"Programs for the people"*

## SOME FURTHER THOUGHTS ON BYTE PACKING

December's Forum gave a few ideas on cutting down on storage space by packing bytes. I want now to return to this subject and consider a different way of storing numerical information economically.

Suppose you wish to store in a particular sequence the horizontal and vertical positions of a pixel (using the Beeb's absolute references of 1280 by 1024), the mode of connection to the next pixel in sequence (ie whether solid line, dotted line, triangular filled or not connected) and the colour of the connection (or the pixel itself if not connected). We will code the connection as 4 for not connected, 1 for dotted, 0 for solid, and 5 for triangular (the reason for this will become clear). And the colours are 0 to 7, depending on mode: no flashing colours are included for now.

Our method of storage rests on our constructing a 10-digit number formed by the four digits of the horizontal coordinate (X), followed by the four digits of the vertical coordinate (M) and the colour (C). This is done by computing  $1,000,000X + 100Y + 10M + C$  and will fit into just one integer storage location of four bytes, for the maximum positive number permissible is  $\&7FFFFFFF$  or 2,147,483,647. Thus for example we can store coordinates of (963,45), a connecting mode of 5 and colour 5 as 963,004,555. And the number corresponding to (1200,1021), a connecting mode of 0 and colour 6 is 1,200,102,106. Each combination has a unique number corresponding to it and each number has a unique combination corresponding to it (assuming the combination is possible).

This is an economical way of storing data. For example, to store data on 100 connections requires just over 400 bytes of storage using an integer array; and 2k of storage gives you over 500 connections.

Accessing the information is

easy, for the  $i$ th point the coordinates are  $A\%(I)\text{DIV}1,000,000$ ,  $(A\%(I)\text{MOD}1,000,000)\text{DIV}100$ . The connecting mode is given by  $(A\%(I)\text{MOD}100)\text{DIV}10$ , and the colour by  $A\%(I)\text{MOD}10$ .

We can do even better than this since we can include flashing colours also, in the same amount of storage. If the colour is flashing we shall use a negative number; otherwise positive. A function to do

IAN BIRNBAUM sets out to improve your programming techniques on the BBC micro.

He will answer reader's questions and develop their ideas - as well as providing some of his own. But the real aim is for readers to provide the questions and answers.

At least £5 will be paid for any tip published, with £10 for those which merit a one-stat award and £20 for real humdingers!

Send your hints or questions to BBC Forum, Acorn User, 53 Bedford Square, London WC1B 3DZ. Please include a self-addressed envelope if your contribution is to be returned.



£20

### Benjamin Finn earns £20 for this tip on using passwords

Here is a very useful routine for inserting a password system into programs on the BBC model A or B. It can be placed anywhere (preferably at the start) in a program, but nonetheless is unlistable.

The program should be renumbered to clear lines 0,1 and 2, and listing 1 entered.

Note that there should be no blank spaces before or after the REMs, and that you may insert any phrase as a password instead of PHRASE (line 1).

Now you should enter the second listing below which makes these lines invisible. If you now list the program lines 0-2 have disappeared, and there are no traces of any alterations.

However, when the program is run the computer will say:

Password?

#### Listing 1.

```
OREM1234567
```

```
1 INPUT "Password? "A$: IFA$(>"PHRASE" !PAGE=0: RUN
2 REM 123456
3 Rest of program...
```

#### Listing 2.

```
A=PA.:$(A+5)=STRING$(5,CHR$(127))
A?10=11:A?11=21:A=A+9:REP.A=A+1:U.?A=244
$(A+1)=STRING$(5,CHR$(127):A?6=6
```

and you will have to enter one. If it is correct all will be well; but a wrong password will cause the message:

```
Syntax error
Bad program
```

and you will find that your program has been erased!

If ever you forget your password but remember the line it is stored in, just enter:

```
1 (or the line number used for the
password routine) and press
RETURN
```

This will delete the offending line, and you may carry on with the program.

□ To recover the program if you mistakenly type in the wrong password, execute the following:

```
?PAGE=13:?(PAGE+3)=12
```



**Program 1.**

```

32000 DEF FNENCODE(X%,Y%,M%,C%):LOCAL N
%,R%
32010 IF C%>7 THEN C%=C%-8:N%=-1 ELSE N
%=1
32020 R%=(1000000*X%+100*Y%+10*M%+C%)*N
%:IF R%=0 AND N%=-1 THEN =-2000000000 E
LSE =R%

```

**Program 2.**

```

32000 DEF PROCDECODE(I%)
32010 IF I%<0 THEN _C%=8 ELSE _C%=0
32020 I%=ABS(I%):IF I%=2000000000 THEN
I%=0
32030 _X%=I%DIV1000000:_Y%=(I%MOD100000
0)DIV100:_M%=(I%MOD100)DIV10:_C%=_C%+I%
MOD10
32040 ENDPROC

```

**Program 3.**

```

32000 DEF PROCPLOT(X%,Y%,M%,C%)
32010 BCOLO,C%:PLOT(5+16*M%),X%,Y%
32020 ENDPROC

```

this is given in program 1, called FNENCODE (X%,Y%,M%,C%); in program 2 a procedure PROCDECODE (I%) is given. The function is used to encode the information (the parameters are horizontal coordinate, vertical coordinate, connecting mode, and colour - this time from 0 to 15). Since there is only one value to be returned, a function is the most convenient way of returning the information.

**T**he procedure in the second program is used to decode the information. Notice we need four global variables to return the information. Conforming to our ideas in December's issue, we use as a prefix for the globals with obvious notation to correspond to the parameters in FNENCODE. If we want to plot the points immediately we do not need the globals. Instead we can pass the values to a plotting procedure.

PROCPLOT (X%,Y%,M%,C%) is such a procedure given in program 3. It should now be clear why we chose the numbers we did for the connecting modes.

It is possible to squeeze even more information into these four bytes. The sixth digit from the right will always contain 0 or 1. It follows that we can additionally store information on a further variable with up to five values, in this sixth digit position. Moreover, if we really want to pack the bytes, we can store information on another variable with two values, this time in the first digit position on the right. But you might now feel economy is being carried too far!

The most important use of these procedures is to save and retrieve graphics information from tape or disc. This may facilitate the creation of an economical 'look-up' table of data to speed up plotting, for example. But other uses are possible.

## SHIFT-LOCK AND CAPS-LOCK CONTROL

Many people have asked whether it is possible to control the Shift-lock and Caps-lock keys from the program. The answer is 'yes', but there are two problems: the method is conditional on which operating system is in use; and you will not be able to use your program across the Tube without modifications.

The general syntax is as follows:

```

?B%=&10 sets Shift-lock;
?B%=&20 sets Caps-lock;
?B%=&30 releases both locks;
?B%=&40 sets both locks.

```


In OS Version 0, B%=&D8 : in OS Version 1, B%=&25A. An easy way to ascertain which OS is installed directly from the program is to execute:

```

IF ?&FFFE=164 THEN <OS 0>
ELSE <OS 1>

```

# What do you do if your BBC Micro goes wrong?

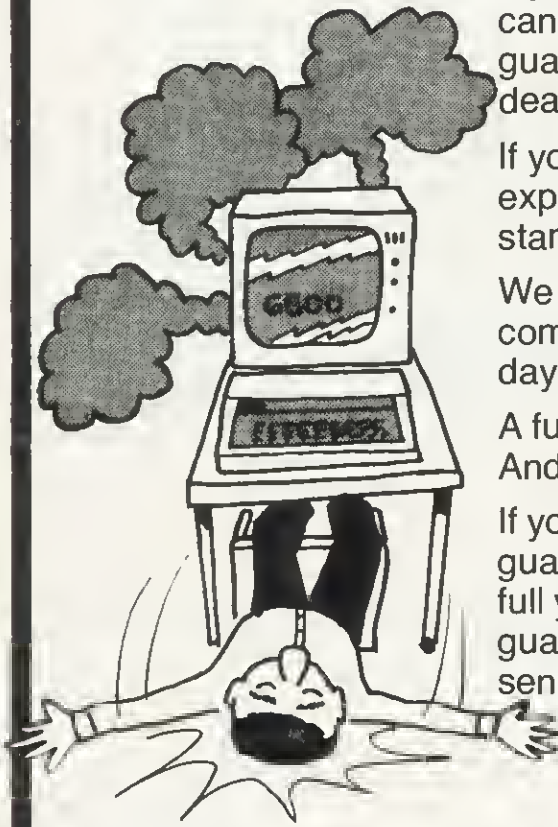

If you value your BBC Micro and your money you can now purchase extra one and two year full guarantees direct from us or via most Acorn dealers.

If your Micro is still under warranty, just fill in the expiry date on the coupon\* and the guarantee will start from that date.

We carry a full stock of parts and should your computer malfunction we will repair it within five days of receipt.

A full one year guarantee costs just **£18.40**  
And a full two year guarantee costs just **£27.60**

If your Micro is already faulty, and out of guarantee, we will repair it on receipt and issue a full years guarantee for **£29.90** or a full two years guarantee for **£39.10**. Please state fault when sending micro.

**For you and your BBC Micro's peace of mind send the coupon today**

Please tick service required.

I enclose **£18.40** for a full 1 years guarantee

I enclose **£27.60** for a full 2 years guarantee

I enclose **£29.90** for an immediate repair and a full 1 years guarantee

I enclose **£39.10** for an immediate repair and a full 2 years guarantee

Surname .....

Initials .....

Address .....

or telephone your access card number to Madingley 210212

Access Card No .....

Make/Model ..... A/B

Serial No. ....

Send remittance to:

**Cambridge Processor Services,  
25 Parsonage Street, Dept. A  
Cambridge CB5 8DN.**

Warranty Expiry\*  
Date / /83  
If applicable

**This offer applies to mainland UK only  
This guarantee does not apply to major damage caused by abuse.**





*electronic monitor manufacturer*



**100% BRITISH** and approved  
RGB colour monitors  
with optional PAL and Audio Interface

**£?**

**LOOK OUT FOR  
NEXT MONTH'S  
ISSUE**



MOUNT ROAD • BURNTWOOD • WALSALL  
ENGLAND • WS7 0AX  
Registered No. 1370335  
TEL. 021-308 7075 TELEX 339671 ALD FAB

Dealer Enquiries are welcome

# MUSIC ON A MICRO

Jim McGregor and Alan Watt assess the values and limitations of the sound facilities on the BBC micro, and show how it can be used for serious instrumental synthesis

Can the sound and envelope on the BBC micro be used for serious instrumental synthesis or are they just for fun? What is instrumental synthesis and can a computer make violin sounds like Yehudi Menuhin?

The answer to the first question is a qualified yes, and this article explores the BBC facilities, and their values and limitations in instrumental synthesis, drawing on some musical physics to try and put them in perspective. We will not go into detail on the meaning of the parameters in the envelope statement, but rather concentrate on how the parameters influence sounds. Also at this stage we will concentrate on the amplitude parameters in the envelope statement.

The answer to the second question is also yes. Given sufficient resources there is no technical reason why a computer could not accurately reproduce or copy a master musician playing eight bars of a Mozart violin concerto on a Stradivarius. This may seem surprising, and it would be pointless – a tape recorder is a better device for listening to Yehudi Menuhin. However, providing sufficiently fine measuring devices are available to capture every subtle nuance, change in intensity, pitch, harmonic envelope, etc, a performance could be reconstructed from computer controlled fragments.

The real point of instrumental synthesis is to make a computer sound like a traditional instrument or make unique sounds unlike any existing instrument.

Perhaps it is best to introduce sound by tying up the aural impressions or qualities of sounds with visual impressions. Any sound is a pressure variation with time, or

successive compressions and rarefactions of air. This pressure variation can be converted into a variation of electrical current as a function of time, using a transducer such as a microphone, and the electrical current or signal displayed on an oscilloscope. This gives us an idea of what sounds look like when converted into such a signal. 'Seeing' sounds then provides a useful bridge between the aural impressions of sounds and the numbers we have to supply to a computer program to generate the sounds. Various examples are shown in figure 1.

A pure tone has a regular sinusoidal appearance and can only be generated perfectly electronically or mechanically (or electromechanically) by a device such as a tuning fork. Musical instruments do not generate pure tones, each mixture a function of many variables, the most predominant being the instrument type and the player. An oboe produces a mellow smooth tone, a trumpet a much harsher cutting tone.

Sound generated by the BBC micro is not a pure tone either. It is a distorted square wave (figure 1), which is why it sounds 'electronic' rather than instrumental. Its other less than desirable characteristic is that it changes shape as a function of frequency or pitch. This means the character of the sound changes with frequency.

Differences in sounds produced by different musical instruments – or in the sounds produced on one instrument played by different players – can be quantified by two mathematical models.



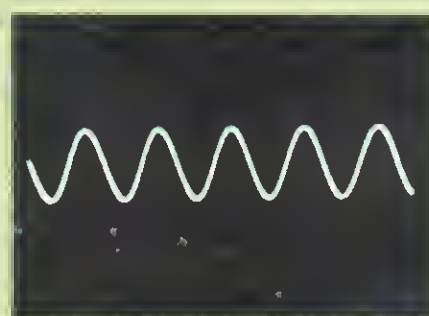



Figure 1.  
Pure tone middle C

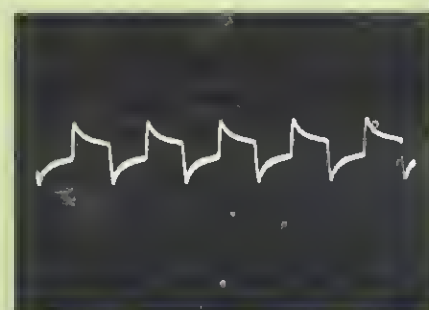

Middle C on the BBC micro

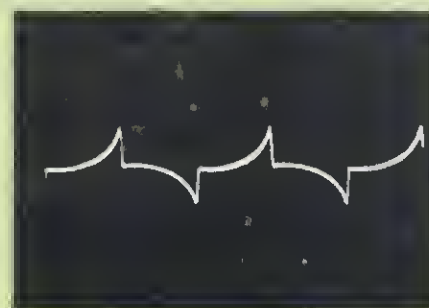

Bottom C on the BBC micro

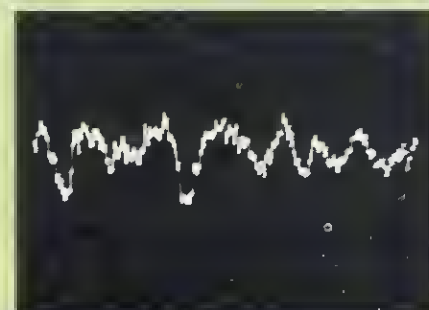

Rock music extract





# NEW SOFTWARE

## Run your business at petty cash prices.



**INVOICES AND STATEMENTS . . . £19.95**  
 Compatible with most micros. See table. Ideal for the small business. A complete suite of programs together with generated customer file for producing crisp and efficient business invoices and monthly statements on your line printer. All calculations include VAT automatically, and the program allows your own messages on the form produced. This program gives you superb presentation and saves time on one of the most tedious tasks in the office.



**COMMERCIAL ACCOUNTS . . . £19.95**  
 Compatible with most micros. See table. A gem of a program, all for cassette, with the following features:— Daily Journal. Credit Sales. Cash Sales. Credit Purchases. Purchases — other. Sales Ledger. Purchase Ledger. Bank Account. Year to date summary. A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance.



**MAILING LIST . . . £19.95**  
 Compatible with most micros. See table. A superb dedicated database to allow for manipulations of names and addresses and other data. Gemini's unique 'searchkey' system gives you a further ten 'user-defined parameters' to make your own selections. Features include the facility to find a name or detail when only part of the detail is known, it will print labels in a variety of user specified formats.



**DATABASE . . . £19.95**  
 Compatible with most micros. See table. The program that everyone needs, the most valuable and versatile in your collection. Facilities include sort search, list print if required. Can be used in place of any card index application; once purchased you can write your own dedicated database to suit your particular needs with a limitless number of entries on separate cassettes.



**STOCK CONTROL . . . £19.95**  
 Compatible with most micros. See table. Dedicated software with all that's necessary to keep control of stock. This program will take the tedium out of stock control and save time and money. Routines include stock set up, user reference number, minimum stock level, financial summary, line print records, quick stock summary, add stock, delete/change record and more.



**HOME ACCOUNTS . . . £19.95**  
 Compatible with most micros. See table. Runs a complete home finance package for you with every facility necessary for keeping a track of regular and other expenses, bank account mortgage, H.P. etc. This program also allows you to plot graphically by Listograms your monthly outgoings.



**WORD PROCESSOR . . . £19.95**  
 Compatible with most micros. See table. This program features routines found in much larger and more expensive packages with a typical word length of 5-6 letters it allows for around 1000 words in memory at one time. Ideal for the user who requires a simple program to write letters on his computer. Features include, block delete, block insert, search and replace, edit text, display text and more.

Dealer/Trade enquiries invited – generous trade discounts for quantity  
**Special ACCESS card instant sales hotline Tel: 03952-5165**  
 for **GUARANTEED** despatch within 24 hours . . .  
 24 hr Ansaphone Service.

All enquiries other than credit card sales to 03952-5832  
**Gemini. Functional Software Specialists. 9, Salterton Road, Exmouth, Devon.**

Tick the box for Program you require. Prices include V.A.T. and Package and Postage. Please supply the following cassette software.

Database .....	£19.95	<input type="checkbox"/>	ZX81 16K Database .....	£9.95	<input type="checkbox"/>
Stock Control .....	£19.95	<input type="checkbox"/>	BBC Cash Book disk or tape .....	£95.00	<input type="checkbox"/>
Mailing List .....	£19.95	<input type="checkbox"/>	BBC Disks – other titles .....	£23.95	<input type="checkbox"/>
Invoices and Statements .....	£19.95	<input type="checkbox"/>	Osborne Disk Database .....	£23.95	<input type="checkbox"/>
Commercial Accounts .....	£19.95	<input type="checkbox"/>	Word processor .....	£19.95	<input type="checkbox"/>
Home Accounts .....	£19.95	<input type="checkbox"/>	Beebcalc .....	£19.95	<input type="checkbox"/>
			Dragoncalc .....	£19.95	<input type="checkbox"/>

Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 Machine Type \_\_\_\_\_ Memory Size \_\_\_\_\_  
 I enclose \_\_\_\_\_  
 Make cheques and postal orders payable to Gemini Marketing Ltd.  
 Diners Card Number \_\_\_\_\_ Access Number \_\_\_\_\_  
 Signature \_\_\_\_\_



**Gemini. Functional Software Specialists, 9 Salterton Road, Exmouth, Devon.**



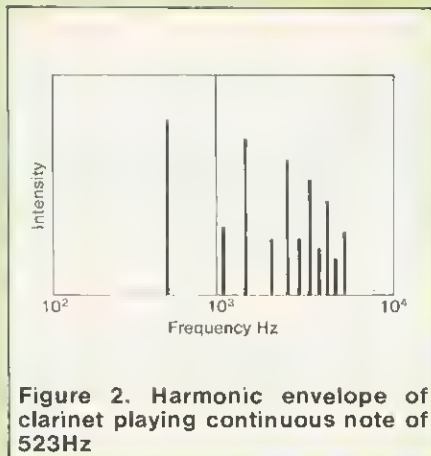


Figure 2. Harmonic envelope of clarinet playing continuous note of 523Hz

First consider a note played on an instrument and held at a steady volume. This exercise carried out on a trumpet will sound totally different from the same continuous note played on an oboe. This is because the mechanical design of an instrument causes vibration modes at different frequencies and the different mechanical designs mean that different instruments exhibit varying vibrational strengths at different modes. A continuous note played on any instrument can be considered to consist of a series of superimposed sine waves all having different frequencies and amplitudes. This is sometimes called a harmonic envelope. The harmonic envelope for a clarinet is shown in figure 2.

The diagram indicates that this note is made up of a sine wave undulating at 523 (the frequency of top C) plus a number of other sine waves or harmonics undulating at twice, three times, four times etc, the fundamental frequency of 523. The fundamental sine wave is the

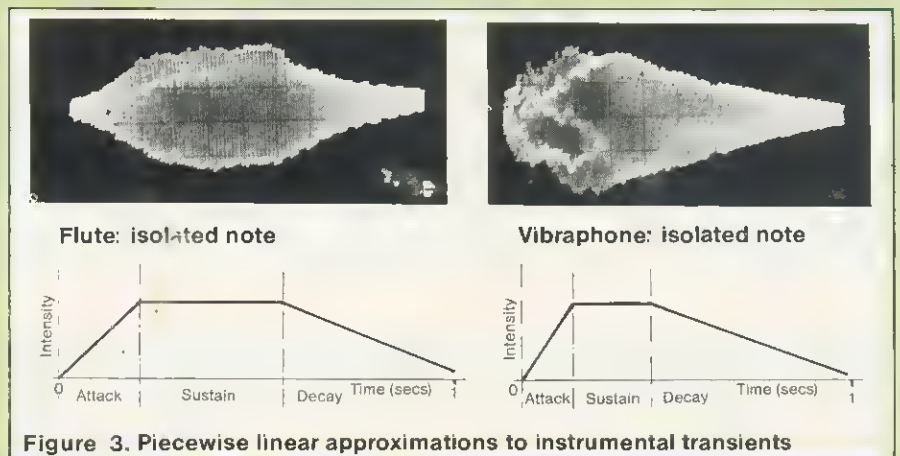


Figure 3. Piecewise linear approximations to instrumental transients

one with the highest amplitude, and the relative amplitude of the other harmonics define a harmonic envelope. The overall shape of this envelope gives a note a characteristic sound, and this shape varies generally with the frequency of the note and the way an instrument is played. Even the same note on the same instrument can produce different envelopes depending on the way it is blown.

The varying mechanical designs of instruments produce completely different harmonic envelopes. Computer synthesis of continuous tones of different instruments can be achieved by playing pure sine waves of different amplitude and frequency simultaneously. The capacity for the BBC computer to do this is, however, limited as it has only three tone channels, and the tone generated is not a pure sine wave, but a square wave, already possessing its own harmonic envelope. To convincingly reproduce

the sound of a continuous note on a particular instrument would need many more than three tone channels, and all of these would have to produce pure sine waves.

There is, however, another important consideration in the sound a particular instrument makes that the BBC computer can synthesise accurately. This is the amplitude envelope. Above we considered a continuous note, but musical notes are not continuous. They start and stop, some more abruptly than others. They take a certain time to build up and decay. These times are characteristic of different instruments.

Figure 3 shows one of a series of isolated notes at the same frequency played on a flute, together with one of a series of notes played on a vibraphone (a tuned percussion instrument like a xylophone with metal bars). The waveforms show that the undulations the instruments make (that themselves can be synthesised

### Program 1. Turns keyboard into 'piano'

```

1 ENVELOPE 1, .....
2 ENVELOPE 2, .....
3 ENVELOPE 3, .....
4 ENVELOPE 4, .....
5
10 octave = FALSE : envelope = -15
20 keys$ = "ZSXCFVGBNJKM,L,/" :
30 *FX 11, 1
40 *FX 12, 1
45
50 currnote$=GET$
60 REPEAT
70 PROCcheckforstops
80 pitch = INSTR(keys$, currnote$)*4 + 37
90 SOUND 1, envelope, pitch, 255
100 IF octave THEN SOUND 2, envelope, pitch+48, 255
110 REPEAT
120 note$ = INKEY$(2)
130 UNTIL note$ <> currnote$

140 SOUND &11, 0, 0, 0
150 SOUND &12, 0, 0, 0
160 IF note$ = "" THEN currnote$ = GET$
    ELSE currnote$ = note$
170 UNTIL currnote$ = ""
175
180 *FX 12, 0
190 END
200
210 DEF PROCcheckforstops
220 IF INSTR(keys$, currnote$) > 0 THEN ENDPROC
230 IF currnote$ = "0" THEN octave = NOT octave
240 IF currnote$ = "p" THEN envelope = -15
250 IF INSTR("1234", currnote$) THEN
    envelope = ASC(currnote$)-ASC("0")
260 REPEAT: currnote$ = GET$
270 UNTIL INSTR(keys$, currnote$)
280 ENDPROC

```

from a number of pure tones) have their amplitude controlled by the transient characteristic of the instrument. The amplitude of the undulations build up, sustain and decay. The attack time on the flute (the time it takes the sound to build up to a maximum) is much longer than the attack time for the vibraphone. The sustain time of the flute is longer than that of the vibraphone. (Although sustain time in a wind instrument depends on the player, figure 3 shows the sound produced by a musician instructed to play as short a note as possible.) A piano, essentially percussive, has a transient that exhibits a fast build up and long sustain. This is almost the opposite of an organ where the note takes a longer time to build up but decays sharply as the air supply is abruptly cut off. In fact a tape recording of a piano played backwards will make organ sounds and vice versa.

The rate at which a note builds up and decays and how long it is sustained for can be controlled accurately by the envelope statement, but the undulations whose amplitude is controlled are square waves and not pure tones or 'trumpet-like' or 'clarinet-like' undulations. Approximate instrumental synthesis is still possible and this demonstrates that transient control or control over the amplitude envelope, is just as important as (if not more important than) the harmonic envelope in determining the unique sound of an instrument.

There are other subtle factors involved in the recipe for an instrumental sound but we have not the space to go into them here.

**A**t this stage it is useful to introduce a program that will play notes from the keyboard and also change the characteristics of the note played as soon as an 'effect' key or 'organ stop' is pressed. You can then play tunes from the keyboard and instantly change the sound produced by pressing an 'effect' key, just as you would on an electronic organ. The structure of the program is amenable to extension.

Program 1 causes the keys on the bottom row of the keyboard to behave like the white notes on an

organ or piano, with the keys on the row above behaving like black notes where appropriate. Key C represents middle C. The 'effect' keys 1, 2, 3, 4 select one of four envelopes for playing subsequent notes and the P key (P for Plain) causes subsequent notes to be played without an envelope. The O key (O for Octave) causes each note to be played together with the note an octave above (using the same envelope for both notes). In the program the inner REPEAT loop causes the SOUND statement to be played UNTIL the key is no longer pressed or UNTIL a different key is pressed. The INKEY parameter defines the length of time the program is to wait and see if a key is pressed. The value of this parameter has got to be as small as possible, (so playing the keys fast is possible), but greater than the repeat rate at which characters are sent by a continually depressed key. The repeat rate is decreased to its smallest possible value using a \*FX call (see *User Guide*). The effect keys are checked by PROCcheckforstops, in between each note being played. A variety of stops could be examined by extending this procedure. The procedure also has to absorb the variable number of characters that will be sent by a stop key due to the increased key repeat rate.

You can define up to four envelope statements and these can be incorporated into a number of effect keys. Some suggestions are:

- single notes with a selected envelope (four possibilities).
- chords can be played with two or three sound statements selecting one of the four

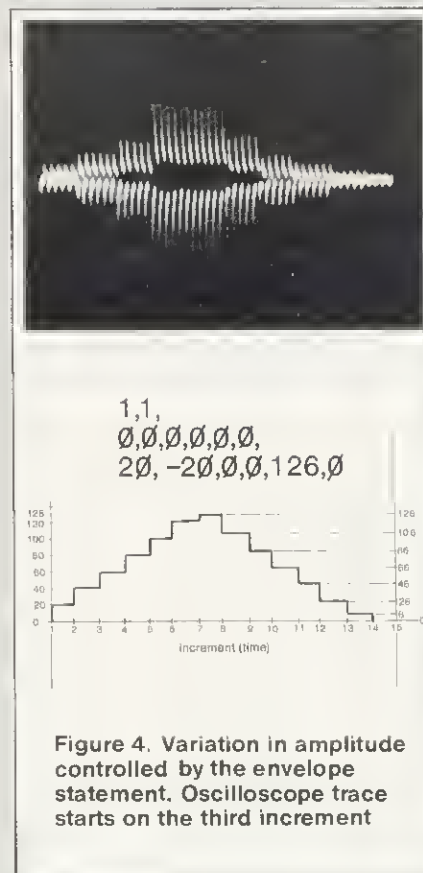


Figure 4. Variation in amplitude controlled by the envelope statement. Oscilloscope trace starts on the third increment

envelope statements (eight possibilities) for each note in the chord.

- playing chords where each note in the chord is controlled by a different envelope statement (4x3x2 possibilities per three note chord).
- Adding channel 0 effects.

Alternatively, program 2 can be used to experiment with the effect of the amplitude envelope by playing tunes from DATA statements (*Acorn User* December). The code

#### Program 2. Sets up envelopes from DATA statements

```

10 tempo = 1
20 INPUT aa, ad, as, ar, ala, ald
30 ENVELOPE 1,1, 0,0,0,0,0,0,
                aa, ad, as, ar, ala, ald
40 REPEAT
50   READ note, duration
60   IF note=255 THEN envelope=0
           ELSE envelope=1
70   SOUND 1, envelope, note, tempo*duration
80 UNTIL note=-1
90
100 DATA .....
```



**Table 1.**  
Envelope parameters for some instruments

aa	ad	as	ar	ala	ald	approx. description
126	-4	0	0	126	100	Electric piano
126	-8	0	0	126	50	Electric guitar
126	-8	-4	-1	126	100	Acoustic piano
126	-10	-5	-2	126	126	Acoustic guitar
63	10	0	-63	63	126	Organ
63	63	0	-63	63	126	Wind instrument

255 is used to represent rests. This means only two items of information are needed per musical entity (note or rest) in the DATA statement.

Figure 4 is an oscilloscope photograph of an isolated note generated using:

```
ENVELOPE 1, 1,
           0, 0, 0, 0, 0, 0,
           20, -20, 0, 0, 126, 0
```

This is an inverted 'V' envelope taking seven increments to build up and seven to decay, the attack rate being equal and opposite to the decay rate. If this was compressed in the horizontal or time direction so the steps were not so apparent, it would begin to look like an instrumental envelope.

Some amplitude envelopes are now given together with a very approximate subjective description of their sound or effect. All the envelope statements in this article are only suggestions. The emphasis is on relating envelope parameters to the produced sound and in giving frameworks for experimentation. With some imagination and patience you should produce pleasing and original sound.

The envelope parameters in table 1 are meant to be used with  $t=1$ . In the top part of the table, percussive envelope values are given, in the bottom part wind instruments' values are suggested. Note that for the wind instruments values of *ald* are greater than *ala* and *ad* is positive. A long slow attack is continued into the decay phase.

**W**e now move on to consider the effect of using two or three sound statements under envelope control. An echo effect can be achieved by using a second sound statement under a different envelope control, but using the same sound channel. A suggesting is:

```
20 ENVELOPE 1,1,
           0,0,0,0,0,0,
           aa,ad,as,ar,ala,ald

30 ENVELOPE 2,1,
           0,0,0,0,0,0,
           aa/2,ad,as,ar,ala/2,ald/2

80 SOUND 1, envelope, note,
           duration * tempo
90 SOUND 1, envelope*2, note,
           tempo * 2
```

The parameters in the echo envelope can be made a function of the main envelope parameters to control the echo effect. Again experiment yourself.

**A**s discussed above, it is not only the transient behaviour of a note that gives it its characteristic instrumental sound, but its harmonics. We can add harmonics to a program generated note, but only two. Also bear in mind that the BBC tones are not sine waves and that is why, no matter how hard you try, all notes will sound 'electronic'. Now in real harmonic envelopes, not only does the amplitude change as a function of the frequency of the harmonic but so does the attack rate of the harmonic. We can control this easily in a program:

```
20 ENVELOPE 1,1,
           0,0,0,0,0,0,
           aa,ad,as,ar,ala,ald

30 ENVELOPE 2,1,
           0,0,0,0,0,0,
           aa/2,ad,as,ar,ala/2,ald/2

40 ENVELOPE 3,1,
           0,0,0,0,0,0,
           aa/3,ad,as,ar,ala/3,ald/3

90 SOUND 1, envelope, note,
           tempo * duration
100 SOUND 2, envelope*2, note +
           48 tempo * duration
110 SOUND 3, envelope*3, note +
           96, tempo * duration
```

Other simple effects can easily be attained with octave sound

```
10 duration = 2
20 ENVELOPE 1,1, 0,0,0,0,0,0,
           126, -20, -20, -20, 126, 60

30 ENVELOPE 2,1, 0,0,0,0,0,0,
           90, -20, -20, -20, 90, 60

35 ENVELOPE 3,1, 0,0,0,0,0,0,
           20, -20, -20, -20, 126, 90

40 FOR bar = 1 TO 16
45   FOR triplet = 1 TO 2
50     FOR note = 1 TO 3
60       IF note=1 THEN envelope = 1 ELSE envelope = 2
70       SOUND 0, envelope, 4, duration
80       NEXT note
90     NEXT triplet
100    FOR note = 1 TO 4
110      SOUND 0, 3, 4, duration*3/2
120    NEXT note
150 NEXT bar
```

**Program 3. Rhythmic effects**

statements if we detune the octaves:

```
80 SOUND 1, envelope, note,
           tempo*duration
90 SOUND 2, envelope note + 50,
           tempo*duration
100 SOUND 3, envelope, note + 97,
           tempo*duration
```

Using a common percussive envelope, this will give the sound of a West Indian steel band - oil drums tuned to octaves but exhibiting less than perfect tuning.


Finally, program 3 demonstrates the use of channel 0 in conjunction with a percussive envelope to produce a rhythm from a monotone percussion instrument. The rhythm is shown in figure 5, and if you don't know what this is from reading the dots then play the program.

**Figure 5. Rhythm for program 3**



Note also in program 3 the use of two envelope statements to simulate that the emphasis can either be an amplitude change or the note played on another drum. A program like this could be merged into either the tune playing program or the keyboard program to add a rhythm section. This rhythm is intended to show the variations possible within a bar, using emphasis from different envelope statements in conjunction with channel 0, rather than something that Gene Krupa would play!

In the next issue we shall continue with treatment of the pitch envelope and look at some mathematical and syntactical elements of music structure that enable you to get your machine to do something more interesting than playing the ubiquitous 'Green-sleeves' from a DATA statement.



# Software Savers

## WORD PROCESSOR PACKAGE

ONLY

**£25.50**

(including VAT and Delivery)

The most advanced word processing program written in machine code and permanently stored on a ROM which plugs into your BBC computer board, (Model B only). This program contains many advanced features including access to existing programs, and is undoubtedly the best value for money. If you are not convinced, we guarantee to refund your money and postal expenses.

---

### BUSINESS PROGRAMS

Sales Ledger	£10.00
Filing	£10.00
Purchase Ledger	£10.00
Payroll	£10.00
Invoicing	£10.00
Home Accounts	£10.00
Stock Control	£10.00
Directory/enquiries	£10.00

### GAMES

Backgammon	£10.00
Space Invaders	£7.00
Pucman	£7.00
Space City	£7.00
Gambling Video	£7.00
Star Trek	£10.00

FREE Program with any order over £45.00 in value

*Send S.A.E. for catalogue. To order send cheque or phone us with your credit card number*

**All prices include VAT and delivery**

---

## SOFTWARE SAVERS

**Temple House, 43-48 New Street, Birmingham B2 4LH**

**Telephone 021 643 4577 Telex 337045**





## COMPUTERCAT Quality Software BBC MICRO

**TOUCH TYPIST (32K)—£9.95** *Educational and useful*  
Are you a keyboard pecker? Improve your typing skills. Your computer is your tutor, monitoring and evaluating your progress. Fully documented. Many already sold to educational institutions.

**OTHELLO (32K)—£8.95** *Highly recommended*  
A favourite board game brought up to date with superb graphics and sound.

**SNIG (32K)—£6.95** *Addictive*  
Not just an ordinary snake game but a super-fast arcade type needing exceptional reflexes and co-ordination.

**BOUNCE (16/32K)—£4.95** *A must at the price*  
NEW and FRUSTRATING. Like all ball games it is the timing that's important. Kids love it.

**GRIG BLITZ (32K)—£5.95** *Highly recommended*  
A fast action arcade game with scintillating multicolour graphics and sound. DEFEND your territory by shooting down the GRIG INVADERS. Ten play levels of increasing difficulty. Are you good enough to reach level 10?

**DATABASE (32K)—£12.95** *Good value*  
Organise your records. Add, change, search, delete and display routines. Shell SORT. MENU driven and user friendly.

**COMPENDIUM (32K)—£5.95** *Three for the price of one*  
4 up (Version 1), 4 up (Version 2), Poke the peg. Three board games to test your powers of logic. Four colours and sound. A challenge for 1 or 2 players.

*Professionally written*

*All programs on cassette with instructions/ documentation*

*Price includes P&P • Delivery by return*

*Deduct £1 per cassette for 2 or more cassettes*

224 Chapel Street, Leigh, Lancs. (0942) 605730

## CLEAR AND CRISP CHARACTERS AND GRAPHICS

Get the best from your BBC/Acorn by using the RGB output

Get crisp, clear graphics in full bold colours with one of our TV/Monitors fitted with a 6 pin DIN input socket.

*Each is a TELEVISION!*

*Each is a COMPUTER MONITOR!*

Why buy just a monitor when you can have a standard TV as well?

A2102/5, 14½" - £295.54      A6100, 20" - £365.68

A3104/5, 16" - £327.08      A7100, 22" - £399.11

A8400, 26" - £499.35. Remote control (ideal for schools)

*All prices include VAT, carriage, 12 month warranty and a 2m 6 pin DIN lead.*

The TVs are from GRUNDIG's range. Remote control and stereo sound also available.

*contact:*

### NEWARK VIDEO CENTRE

108 London Road, Balderton, Newark, Notts

Tel: 0636 71475. Open 6 days a week.



OUR PROGRAMS ARE NOT  
JUST FUN—they're an  
education!!

**CHALKSOFT** is a Software House specialising in Educational Programs for Parents and Teachers of children aged 4-15. Our guaranteed cassettes are available by mail order and from selected dealers.

**EXAMPLES** (all for the BBC 32k) AVAILABLE NOW—

**ANGLE** £8.95  
Set of 4 graded programs with superb graphics demonstrating Angle as 'turning', degrees, names of various angles, how to use a protractor, with questions to check understanding. Even measures angles direct from the screen. Ages 8-14.

**INKOSI** £5.95\*  
Be an African King! If your strategy is good you may stay for 10 years, but watch out for the Witchdoctor. Colourful simulation with great graphics and sound—Ages 10-adult.

**INVISIBLE MAN** £5.95\*  
Draws and labels a grid, and displays a man who disappears! Feed in co-ordinates to find him in the time allowed. With compass point clues; children love it. 3 levels. Ages 7-14.

**LETTERS** £9.95  
Draws slowly (and correctly!) full-screen lower-case letters of the alphabet—in set of 5 programs. Invaluable aid for teachers and parents of children aged 4-6. With booklet.

**METRICS** £9.95\*  
Set of 5 programs giving practice in the Metric System—mass, volume, capacity, length and area—good sound and visual effects, and score is kept! Ages 10-15.

**PASCAL** £5.95\*  
Two programs show construction and properties of Pascal's Triangle, then ask questions about it. Good graphics.

**SEQUENCES** £5.95\*  
Menu-driven demonstration, with good graphics, of 7 important number sequences, such as Factors of 3, Fibonacci, Primes, Triangular Nos, etc. Good to dip into!

COMING SOON  
PUNC-MAN  
CAPITAL LETTERS  
STORY A

**VIC 20**

Programs marked \* are also available for the VIC 20—all are 6.5k versions.

Send SAE for details to:

*chalksoft*

Lowmoor Cottage (AU3)  
Tonedale  
WELLINGTON  
Somerset TA2 10AL  
082 347 7117

TRADE AND EXPORT ENQUIRIES WELCOME

## Betasoft

Quality software for the BBC micro

**MUSIC** (for Model A or B) £8.00

Enables your micro to play any music which you choose to type in, using a simple notation, in up to 3 parts. Comes complete with demonstration pieces including 'The Entertainer' (needs 32k) and a Bach composition. We challenge anyone to produce better sounding music on the BBC micro.

**DESIGN** (for Model B) £8.00 Requires joysticks

This program provides facilities for accurately drawing on the screen, and storing designs or diagrams on cassette. Commands include sketch, fill, copy, dump, load and save. Drawing is done on mode 1 screen. Send SAE for free sample printouts of screen.

**ECONOMY** (for Model B) £8.00

The aim is to control a sophisticated model of the British economy. Not only an exciting game, but this program also provides helpful insight into, and understanding of macro economics. Written by a Cambridge University economist.

MAIL ORDER ONLY TO: 10 Fairview Court, Glyncoed, Cardiff CF2 7DY

ORDERS DESPATCHED WITHIN 48 HOURS

Tel: 0222-735961 after 6.00 PM for details.

We pay 30% royalties for quality programs.

**Joe Telford builds a lightpen for £17 and writes the software to run it on the BBC micro – with or without the Tube**

## SHINE A LIGHT



A typical lightpen picks up light given out by the TV screen. The pen sends an electronic signal into the micro, where circuitry decodes the position on the screen at which the pen is pointing. Software can access this input, tailor it to the screen mode and allow the user to play games, draw and 'paint', design layouts, select multiple choice answers, update and alter information using a menu, or interact with graphic simulations. And these are just a few applications.

There are two main problems to

be solved: construction of the hardware, and writing suitable software. Before doing either, look at the input/output facilities of the BBC micro to find a suitable port or input channel. Normally I would go for the user port. However, examining the ADC (analogue to digital converter) port circuitry shows a possible connection.

Figure 1 shows the paddle and lightpen (ADC) connector. Notice that pin 9 is marked LPST B, and this is the light pen strobe input. Our first priority is to ensure a TTL type input goes to this pin when our lightpen is held to an illuminated section of TV screen.

The RS catalogue of electronic components, shows a device which can be used: the pin photodiode (RS number 303 292) at £6.33.

The high sensitivity of the pin photodiode allows a range of screen intensities to be received. If the pen does not seem to react to the screen, the remedy is often simply to increase screen brightness on the TV.

The value of this is that a simple circuit can be constructed, which allows a slim biro to be used. Figure 2 shows a circuit for the pin photodiode. The tag on the pin photodiode identifies leads 1,2,3 when aligned with its diagram in figure 2.

While constructing a prototype, I decided the pen's facilities would be enhanced if it could move a cursor across the screen. When that cursor was in the correct position, pressing a switch would indicate this to the computer. A keyswitch on the keyboard would do, but this defeated the philosophy of having a self contained lightpen. Hence the

touch pad in the prototype circuit.


In addition to the wires from sensor to paddle connector, we take wires to the outside surface of the pen. These are connected to an analogue input and effectively measure skin resistance. Under software control we can make these contacts behave like a switch. Notice also that we have a 100k (100,000 ohm) resistor, which makes a potential divider. We develop a voltage of about 1.8v across the user's finger, when touching the contacts (about the same as a single battery in a torch).

**WARNING:** Ensure the ADC reference voltage is not at mains potential, and that you do not touch live wires while using the lightpen. Neither the author, *Acorn User* nor Acorn will accept responsibility in the event of an accident involving using mains electricity with this lightpen. It is designed to operate at voltages of 1.8 volts and 5 volts only.


Figure 3 shows the constructed lightpen. The connector to the ADC port is a 15 pin 'D' connector available from most BBC micro stockists, RS or Farnells. The connecting wire is five core stranded wire, and about four feet will be needed. Again, any electronics dealer should sell this. The touch sensors can be made from two copper strips (half-inch Veroboard) which after soldering, can be glued on the pen barrel.

Soldering the light sensor is easy, providing you use pliers to dissipate heat from the sensitive pin photodiode (figure 4). Once the leads are soldered they need to be individually insulated with tape.

The pen itself can be any size which allows the light sensor to fit inside its empty barrel. Once the sensors are glued in place, the pen

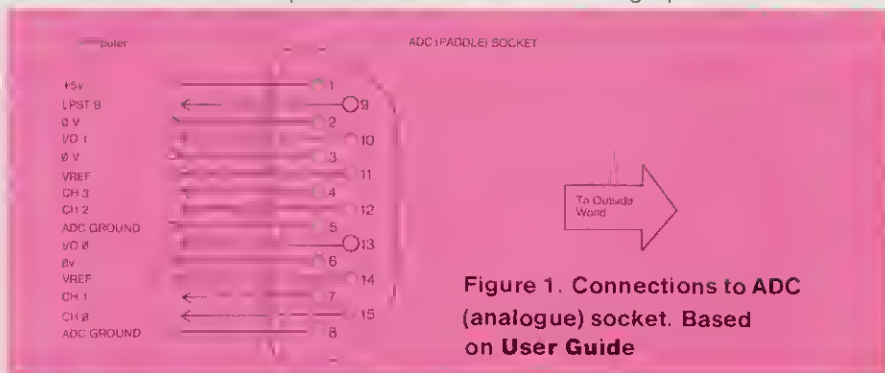

**Figure 1. Connections to ADC (analogue) socket. Based on User Guide**

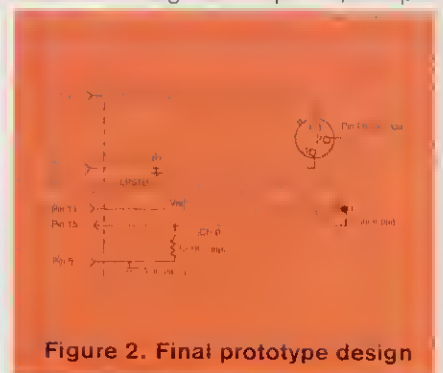


**Figure 2. Final prototype design**



# P.L. DIGITISER SYSTEM™

Designed for use with the BBC Model B Microcomputer

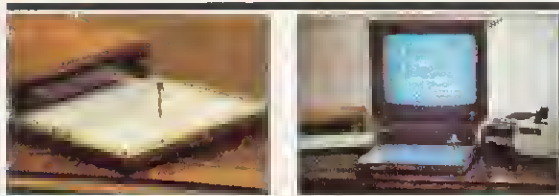

The P.L. Digitiser System enables you to reproduce complex pictures and diagrams, or produce original designs, quickly, easily, and accurately. The package consists of the 'Graphics Digitiser' incorporating a tracing pad (mapped out by rectangular grid) 256mm x 205mm and the 'Control Program' (cassette tape) which handles the information passed from the digitiser to the microcomputer.

**WIDE RANGE OF INSTRUCTION BLOCKS.** Instruction blocks enable: boxes and circles of any size to be constructed by specifying two probe positions; filling area with chosen colour; drawing of irregular shapes using chosen resolution; outlining defined area in different colour and varying line thickness; creating lines in Horizontal, Vertical or Angled modes, with parallel lines in repeat or multiple repeat styles again in selected thickness; write and position text.

**COMPLETE EDITING FACILITY.** Mistakes can immediately be erased and rectified.

**RELOCATION AND SCALE.** Images may be relocated simply by inputting two probe positions and

scale may be increased or reduced by making just two inputs.




**STORAGE.** Pictures may be saved on cassette or disc file or reproduced by a line printer.

**FULL COLOUR.** The range of colour facilities offered by the BBC micro is easily handled by the Digitiser, in modes 4 and 5.

**ACCURACY.** The probe position is continuously displayed on the screen and fidelity of image to original drawing is very accurate.

**NO KNOWLEDGE OF BASIC REQUIRED.** Users can very easily and quickly familiarise themselves with the P.L. DIGITISER SYSTEM.

TM - B. S. Dollamore Ltd, Castle Gresley,  
Burton-on-Trent, Staffs DE11 9HA,  
Telephone: Burton-on-Trent (0283) 217905



TO: B. S. Dollamore Ltd, Castle Gresley,  
Burton-on-Trent, Staffs DE11 9HA

Please supply the following:

Qty	Description	Cost	VALUE
	P.L. DIGITISER	£109.50	
	Post & Packing		£4.00
	V.A.T. @ 15%		
	TOTAL		

Each Digitiser is supplied with cassette Control Program and comprehensive operating instruction manual.

Please charge on Access/Visa Card

No. ....

Signature .....

Name .....

Address .....

# OFF RECORDS...

The London ACORN-BBC Centre  
Suppliers to Schools and Colleges  
Maintenance Contractors

## Atom:

Full hardware and software support.

## BBC:

Model A £299  
Model B £399  
Memory up-grades £21.99  
Repair service and component supply.

## Printers:

Seikosha 100 £215  
Epson MX80FT/3 £385  
SCM Daisywheel £485

## Cassettes:

Matched Cassette Recorders £26

## Monitors:

12" Green Screen (Hitachi/Phoenix) £110  
12" Colour (Kaga) £255  
14" Colour (BMC/Cable) £255

## Discs:

TEAC 40-track £199  
Shugart twin 40-track £299  
TORCH dual disc drive with Z80 processor, 64K RAM, CP/M and FREE software £780

## Eprom programmer:

Specially designed for BBC. Programs 12 different Eproms including 27128. Includes screen software £95 (dealer enquiries invited)

Add 15% VAT to all prices. Carriage extra.

## Tapes:

Top Tape: see adverts in Radio Times.  
OFF Records beats all published prices.

## Stationery:


Moore Paragon main agents. Large selection of continuous stationery, forms and labels.

## Books:

Browse through the Computer Book Department for educational, scientific and business applications.

## COMPUTER HOUSE

58 Battersea Rise  
Clapham Junction  
London SW11 1HH  
Telephone 01-223 7730

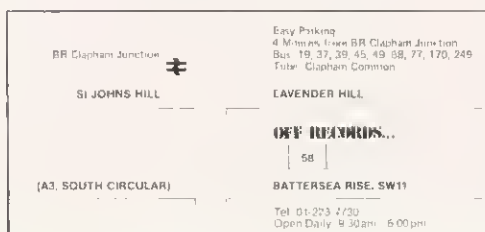

## New Showroom:

OFF Records would expect you to buy best value. Spend some time in the relaxed atmosphere of our new showroom to find out exactly what you are getting for your money.

## OFFware:



CHARAID for the design of a block of 4 characters in any graphics mode including mode-7. Outputs VDU23 commands, teletext commands and printer commands to screen or printer together with actual design. Substantial software with more than 20 well-documented commands. Indispensable for graphics work.

£7.50 p.p. & VAT incl.

ATILITY contains seven essential routines for the disc based Atom: \*COPY, \*COPYT, \*COPYD, \*RENAME, \*PURGE, \*BACKUP, \*AUTORUN. £25 p.p. & VAT incl.

## Vacancy:

OFF Records are looking for a bright spark with good knowledge of both software and hardware. Initially a Saturday job with a view to full-time employment.

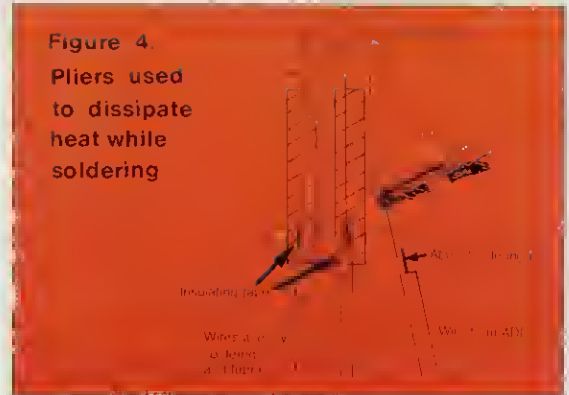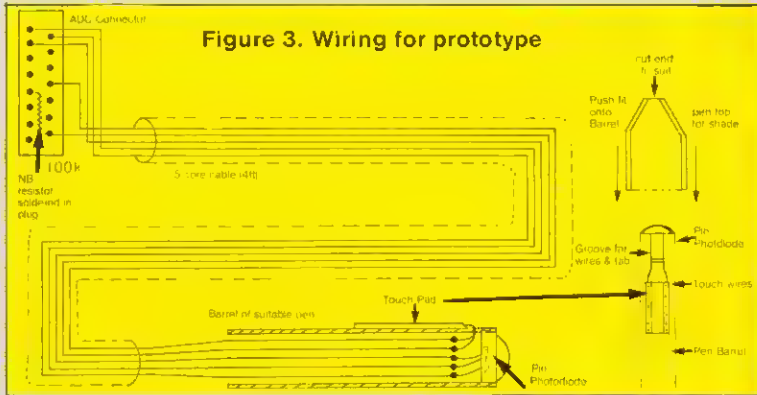

cap can act as a shade to improve accuracy. This fits over the light sensor and has its end cut to let in light from the screen.

The total cost of this last pen (buying new equipment):

Order no	Item	Cost	Supplier
303 292	Pin photo-diode	£6.33	RS
140 822	15 pin D plug	£2.61	Farnells
140 841	15 pole D cover	£3.99	Farnells
140 496	5m cable	£1.85	Farnells
	100k ohm resistor	£0.03	Tandy etc.
	Old pen to suit + VAT	£0.00 £2.22	
	<b>Total</b>	<b>£17.03</b>	

If nothing else, readers can see most commercial lightpens are not tremendously overpriced, although if you made say 100 pens they would each cost about £14.

At this point, we have our light pen to plug into the ADC port, except nothing happens. This is because we have to use software to get at the 'other end' of LPSTB.

The other end is connected to a fairly high powered chip inside the BBC micro. Not, as we might expect, the ADC chip, but the 6845 CRTC. 6845 is the integrated circuit number and CRTC means cathode ray tube controller. This works in combination with the video ULA to control the screen in a number of ways. One of the tasks of the CRTC is to handle the signal picked up by the lightpen and to generate a unique number for each screen location it reads.

The CRTC contains 18 registers numbered 0 to 17. Each is used by the BBC micro in different ways,

though we are especially interested in registers 16 and 17 which contain information about the lightpen. Register 16 holds the most significant byte of the location of the lightpen and register 17 holds the least significant byte. Putting them together gives us a number which relates to the position of the lightpen on the screen.

Unfortunately, the 18 registers are not directly memory mapped in the BBC micro. However, page 437 of the *User Guide* gives a hint on how to access the registers which we need.

Location &FE00 is memory mapped to the address register of the CRTC and location &FE01 is memory mapped to the register file of the CRTC. So, if we put a number from 0 to 17 into location &FE00 then location &FE01 effectively becomes the CRTC register indicated by that number.

For example, type:

```
?&FE00=16:P.?&FE01
?&FE00=17:P.?&FE01
```

Readers will see that each line produces a number in the range 0 to 255, i.e., a byte-sized number.

Together these tell us where the lightpen is pointing. We get numbers from these registers even if the lightpen isn't pointing at the screen, or indeed isn't even plugged in. Type this program:

```
10?&FE00=16:P.?&FE01
20?&FE00=17:P.?&FE01
```

Now plug in the lightpen, hold it about five inches from a 60W bulb and type RUN. The program will print two numbers. Remove the pen from the lamp quickly and type RUN again. The same two numbers should appear.

This indicates the CRTC has memorised the last known pen position. To test the pen with a TV screen, simply LIST the program a couple of times, turn up the brightness and hold the pen on a part of the listing. Type RUN. Two different numbers should appear. Move the pen to another part of the listing and type RUN. Another pair of numbers should appear. If this is the case we are ready to begin writing software. If not, check the connections on the D connector, and the pin photodiode itself.

Program 1 is an essential procedure to run the lightpen. It is called by PROC\_quopen which regards the screen as a series of

**Program 1. Lightpen procedure**

```
1290DEFPROC_quopen
1295LOCAL offset,width,scale
1300offset=1542:width=80:scale=1
1305REPEAT
1310:
1315?&FE00=16:hipen=?&FE01
1320:
1325?&FE00=17:lopen=?&FE01
1330penpos=INT((hipen*256+lopen)-offset)
1335peny=penpos DIV width
1340penx=INT((penpos MOD width)/scale)
1345UNTIL ADVAL(1)/16>100
1350ENDPROC
```



**Table 1. Contents of 'offset' for each mode**

Mode	Offset
7	10248
6	3076
5	2820
4	2620
3	2054
2	1542
1	1542
0	1542

**Table 2. Contents of 'width' for each mode**

Mode	Width	Maximum resolution
7	40	single character
6	40	single character
5	40	half character
4	40	single character
3	80	single character
2	80	quarter character
1	80	half character
0	80	single character

**Table 3. Contents of 'scale' for each screen mode**

Mode	Scale= (to access single characters)
7	1
6	1
5	2
4	1
3	1
2	4
1	2
0	1

character sized locations as for text handling. It returns the position of the lightpen in two variables, *penx* and *peny*. These can be used in the TAB function. If for example the lightpen is pointing at line 7, character position 14, then *penx* will contain 14 and *peny* will hold 7. Hence a program line:

```
PRINT TAB(penx,peny);"P"
```

will print a 'P' on the screen in front of the lightpen.

The procedure uses the special variables 'offset' and 'width'. The first is essential to find the top left screen position. Because of hardware timings etc, when the CRTC returns the pen location, it is between 1000 and 10248 higher than expected depending on the screen mode. To correct this, we subtract the 'offset' value from the combined contents of CRTC registers 16 and 17. This is done in line 1330. Alter line 1295 for each mode using table 1, which lists the contents of 'offset' for each screen mode.

The next special variable which users must set up for each screen mode is 'width'. This is the resolution of the lightpen across the width of the screen, and table 2 shows this for each mode. The last of the special variables is 'scale'. This enables the lightpen to access the screen in whole characters. Again, 'scale' needs setting for each mode (table 3).

Lines 1305 and 1345 form a loop which allows the CRTC to continually update *penx* and *peny*. This continues until a touch pad is pressed and is tested by:

```
UNTIL ADVAL(1)/16>100
```

The value 100 may need adjusting as it is an analogue of skin

resistance. A suitable value should be between 50 and 300, sensitivity increasing as the value decreases.

The idea of the touch pad is that the pen can be held against the screen until the user is confident the pen is correctly placed. Then, pressure on the pad will conclude the procedure, and return the latest values of *penx* and *peny* to the body of the program. It acts as a safety catch to prevent spurious garbage entries.

Program 1 is the procedure on which other programs included in this issue are based. However, the lightpen is a device which will still be used when readers upgrade to a second processor at the other end of the Tube. Unfortunately, the region of I/O memory in the BBC micro will not move along the Tube, and so such commands as:

```
P.??FE01
```

may print a value, but certainly not the value of the CRTC register file.

Program 2 performs just as program 1 except it is Tube compatible. The lines which allow this compatibility are 1040 to 1075. An explanation of these is as follows:

```
1040 *FX151,0,16
```

means place 16 in location 0 of

page &FE (\*FX151 means write to page &FE). It is identical to ?&FE00 = 16 except it is Tube compatible.

1050 A%=&96;X%=1 means set A% to &96 and X% to 1 in preparation for calling a machine code routine. Don't worry! Acorn have written the routine for us.

1055 hipen=(USR(&FFF4)DIV&FFFF) AND &FF calls a machine code subroutine which places A% in the accumulator and X% in the X-register of the 6502. The &FFF4 start location of the subroutine indicates this is an OSBYTE (operating system byte) call, and with parameters A%=&96 and X%=1 it reads the contents of location 1 of page &FE in the I/O processor (BBC micro). The result of the USR statement is a number which is made up of four bytes: (i) program status register, (ii) Y register, (iii) X register, (iv) the accumulator.

The rest of the line:

```
DIV &FFFF) AND &FF
```

extracts the single byte we need, that in the Y register.

Lines 1060 to 1075 perform the same functions as 1040 to 1055 except they produce the contents of 'lopen'.

The procedure is set for a particular screen mode by line 1010. The three most common

**Program 2. Tube compatible**

```
1000DEFPROC_quopen
1010LOCAL offset,width,scale
1020offset=1542:width=80:scale=1
1030REPEAT
1040*FX151,0,16
1050A%=&96;X%=1
1055hipen=(USR(&FFF4)DIV&FFFF) AND &FF
1060*FX151,0,17
1070A%=&96;X%=1
1075lopen=(USR(&FFF4)DIV&FFFF) AND &FF
1080penpos=INT((hipen*256+lopen)-offset)
1090peny=penpos DIV width
1100penx=INT((penpos MOD width)/scale)
1110UNTIL ADVAL(1)/16>100
1120ENDPROC
```

modes I have used are 7,4, and 2. From the tables we can see these modes require the following amendments to line 1010:

```
1010offset=10248:width=40:scale=1
for mode 7
1010offset=2820:width=40:scale=1
for mode 4
1010offset=1542:width=80:scale=4
for mode 2
```

The second version of the procedure relies on \*FX calls not available before OS 1.00, so I will refer to the first version of the procedure from here onward.

Because the pen needs screen light, there are two techniques which can be used. The first is to light up only the parts of the screen which contain information for the pen to work on. For example the message:

```
PEN HERE TO GO ON >@<
```

is followed by a target (a bright character) at which the pen must be aimed.

This approach is useful in a question and answer session, or in a program where the lightpen selects from a menu. In a game of computer draughts however, the sight of 24 targets might be more than a trifle offputting.

The second technique is best used after experimenting with the target approach. In this approach the whole of the screen is brightened, normally by CLS after VDU19,0,7,0;0;0; The whole screen can then be accessed by the lightpen, and software would decide which inputs were valid. This allows game playing programs, freehand design, painting, drawing and so on.

**P**rogram 3 demonstrates the target approach by randomly choosing targets in the lower half of a mode 7 screen. When the lightpen is held to a target and the touch sensor pressed, the location of the target is printed. To avoid auto repeating by people who are slow to remove their fingers from touch pads, I have included line 70 which is intended to give the user a positive feedback on pressing the touch sensor. Lines 100 and 110 also ensure the user has one second's grace, before GOTO40 begins to auto repeat.

Users will find the sound cue

### Program 3. Relies on the target approach

```
10MODE7
20CLS
30PRINTTAB(10,5);"PEN IS AT"
40x=RND(39):y=RND(10)+10
50PRINTTAB(x,y);CHR$(255)
60PROC_quopen
70VDU7
80PRINTTAB(10,7) penx peny
90PRINTTAB(x,y);CHR$(32)
100t=TIME+100
110REPEAT UNTIL TIME>t
120GOTO40
1000DEFPROC_quopen
1005LOCAL offset,width,scale
1010offset=10248:width=40:scale=1
1015REPEAT
1020:
1025?&FE00=16:hipen=?&FE01
1030:
1035?&FE00=17:lopen=?&FE01
1040penpos=INT((hipen*256+lopen)-offset)
1045peny=penpos DIV width
1050penx=INT((penpos MOD width)/scale)
1055UNTIL ADVAL(1)/16>100
1060ENDPROC
```

### Program 4. Background approach

```
10MODE4
20VDU19,0,7,0;0;0;19,1,0,0;0;0;:CLS
30PRINTTAB(10,5);"PEN IS AT"
40PROC_quopen
50VDU7
60PRINTTAB(4,7)penx peny
70PRINTTAB(penx,peny);CHR$(42)
80t=TIME+100
90REPEAT UNTIL TIME>t
100GOTO40
110REPEAT UNTIL TIME>t
120GOTO40
1000DEFPROC_quopen
1005LOCAL offset,width
1010offset=2820:width=40:scale=1
1015REPEAT
1020:
1025?&FE00=16:hipen=?&FE01
1030:
1035?&FE00=17:lopen=?&FE01
1040penpos=INT((hipen*256+lopen)-offset)
1045peny=penpos DIV width
1050penx=INT((penpos MOD width)/scale)
1055UNTIL ADVAL(1)/16>100
1060ENDPROC
```

useful, and with practice can do away with the delay loop altogether. The only other point about this program is that it needs the light pen procedure given earlier. For mode 7, line 1010 of the procedure will need altering to:

```
offset=10248:width=40:scale=1
```

Program 4 demonstrates the background approach by allowing the user to point the pen anywhere on the mode 4 screen. When the lightpen is held to the screen and the touch sensor pressed, the location of the target is printed plus an asterisk in the actual position. This program uses the same approach to prevent users from

auto repeating. The program again needs the lightpen procedure given earlier. For mode 4, line 1010 of the procedure will need altering to:

```
offset=2820:width=40:scale=1
```

I hope to continue the use of the lightpen into drawing, painting and general design. Readers who do not feel able to construct either design from this article should be able to buy one from a number of sources, including Acorn. Components from RS and Farnell's catalogues may be ordered through electronic dealers or TV repair shops.

● Next month; how fast does a disc drive?



# FINANCIAL

**BBC Model B**

# GAMES

## THE WORLD TRAVEL GAME



1 or 2 Players,  
Choice of Game,  
'Exciting, Tense, Competitive and  
even Educational.'

X X X X X



Travel the World; Journey by air, rail and road.  
Exchange currencies; Buy souvenirs; Book tickets.  
Cope with hijacks, strikes, robbery and other problems  
inherent with travel.

Visit countries as diverse as Russia & the Falklands.

Your aim is to collect 6 souvenirs & return to LONDON intact!  
— £6.95 —

## GREAT BRITAIN LTD



You are P.M.  
and Chancellor of  
'Great Britain'

You must select the  
Party you wish to represent and your aim is to stay  
in office for as long as possible. You must control  
inflation and unemployment, maintain the exchange  
rate, introduce social reforms and stay popular. The  
game is split into sectors: country profile, shopping  
basket, budget day, reform opportunities, manifesto,  
and most important election nights (a telling time).

**A COMPLEX GAME THAT YOU WILL NOT TIRE  
OF IN A HURRY**

— £5.95 —

## INHERITANCE



Gt. Uncle Arbuthnot  
is dead.  
You stand to inherit !!

A 2 part game. Prove your  
financial accumen in Part 1 by investing wisely at  
the stock and metal markets; if desperate try the  
casino or the horse races. If you are successful you  
will enter the world of big business in Part 2. Find  
the secret formula for paradise cola; manufacture  
and market the drink; cope with strikes, fires, frauds,  
cash shortages, etc. Your ultimate aim is to become  
a millionaire! **A MAMMOTH GAME PACKED  
FULL OF FEATURES**

— £5.95 —

See Reviews in:

Acorn User Dec '82  
Personal Computer Jan '83

Trade Enquiries Welcome  
Special Deal for Schools.

## **Simon W. Hessel (Dept A)**

**15 Lytham Court, Cardwell Crescent  
Sunninghill, Berks.—Tel: Ascot 25179**

24hr Despatch — One Year Guarantee — Money-back if not  
satisfied.

## OXO BY LIGHTPEN

THIS program demonstrates the use of the lightpen in a game format, can be used as a basis for further development, for example to make the computer play against

you. It relies on the 'background' technique. Players have to input their names from the keyboard, for convenience, although all input after this is by lightpen.

```

10REM*****
20REM*
30REM* LIGHT PEN OXO *
40REM*
50REM* (c) J Telford 1982 *
60REM*
70REM*****
80*TV0,1
90:
100REM SET MODE 4 BLACK ON WHITE
110:
120MODE4
130VDU19,0,7,0;0;0;19,1,0,0;0;0;
140:
150 REM LARGE X AND O
160:
170VDU23,227,255,0,0,0,0,0,0,0
180VDU23,228,0,0,0,0,0,0,0,255
190VDU23,229,1,1,1,1,1,1,1,1
200VDU23,230,128,128,128,128,128,
128,128,128
210VDU23,224,1,2,4,8,16,32,64,128
220VDU23,225,128,64,32,16,8,4,2,1
230VDU23,226,129,66,36,24,24,36,66,129
240:
250REM SPACE FOR PLAYING BOARD AND
260REM AND 2 SYMBOLS X & O
270:
280DIM board(3,3),Ch$(2)
290:
300REM PUT X AND O INTO stores
310:
320DATA 225,32,224,10,8,8,8,32
330DATA226,32,10,8,8,8,224,32,225
340Ch$(0)="" :FOR I%=1 TO 17
350READ data
360Ch$(0)=Ch$(0)+CHR$(data):NEXT
370DATA224,227,225,10,8,8,8,230,32
380DATA229,10,8,8,8,225,228,224
390Ch$(1)="" :FOR I%=1 TO 17
400READ data
410Ch$(1)=Ch$(1)+CHR$(data):NEXT
420:
430REM FINAL SET UP
440REM F= Player to go
450REM lx,ly = last location of pen
460REM win= tests for win/draw
470REM ng = number of goes
480:
490F=0
500DIM name$(2)
510PROC_names
520CLS:PROC_Board
530lx=0:ly=0
540win=0:ng=9
550:
560REM Now repeat for 9 goes
570REM or until a winner
580:
590REPEAT
600:
610REM get Lp input from
620REM correct player.
630:
640PROC_go
650:
660REM 1 second delay to prevent
670REM auto repeat.
680:
690time=TIME+100
700REPEAT UNTIL TIME>time
710:
720REM Now check for win
730:
740PROC_check
750:
760REM decrement no of goes left
770:
780ng=ng-1
790:
800REM If at end then Win=-1
810REM to indicate a draw
820:
830IFng=0 AND win = 0 win=-1
840IF win > 0 THEN PROC_win
850IF win = -1THEN PROC_draw
860:
870REM If the program gets here
880REM then win = 0
890REM IE keep going
900:
910UNTIL win
920:
930REM The game is over check for
940REM another go.
950:
960PRINT TAB(5,26);
970PRINT"Pen to { } for another go."
980REPEAT:PROC_quopen
990UNTIL penx=15 AND peny=26
1000:
1010REM Go back to beginning
1020:
1030VDU7:GOTO 520
1040:
1050REM Draw Board and fill array
1060:
1070DEFPROC_Board
1080MOVE336,320:DRAW336,864
1090MOVE528,320:DRAW528,864
1100MOVE132,496:DRAW704,496
1110MOVE132,688:DRAW704,688
1120FOR J%= 1 TO 3
1130FOR I%= 1 TO 3
1140board(J%,I%)=-9
1150NEXT:NEXT

```



```

1160ENDPROC
1170:
1180REM copy array to screen
1190:
1200DEFPROC_printboard
1210FOR J%= 1 TO 3
1220FOR I%= 1 TO 3
1230IFboard(J%,I%)=-9 THEN 1260
1240PRINTTAB(I%*6,J%*6);
1250PRINTCh$(board(J%,I%))
1260NEXT:NEXT
1270ENDPROC
1280:
1290REM get players names
1300:
1310DEFPROC_names
1320CLS:REPEAT:PRINTTAB(5,10);
1330PRINT"Who is ";Ch$(0);" ";
1340INPUTname$(0)
1350UNTIL LEN(name$(0))>1
1360CLS:REPEAT:PRINTTAB(5,10);
1370PRINT"Who is ";Ch$(1);" ";
1380INPUTname$(1)
1390UNTIL LEN(name$(1))>1
1400CLS:PRINTTAB(5,20);
1410:
1420REM get pen location to start
1430:
1440PRINT"Pen here to begin. ( )"
1450REPEAT:PROC_quopen
1460UNTIL penx=27 AND peny=20
1470VDU7
1480ENDPROC
1490:
1500REM get each players go from
1510REM Lp.
1520:
1530DEFPROC_go
1540PRINTTAB(5,2);STRING$(30," ")
1550PRINTTAB(5,2);name$(F);"s go"
1560REPEAT:PROC_quopen
1570UNTIL INT(penx/6) > 0 AND
    INT(penx/6)<4 AND INT(peny/6)>0 AND
    INT(peny/6)<4
1580IF INT(peny/6)=1y AND
    INT(penx/6)=1x GOTO1560
1590IF board(INT(peny/6),
    INT(penx/6)) = -9
    board(INT(peny/6),INT(penx/6)) =
    F :SOUND1,-15,50*(F+1),8 :GOTO1620
    ELSE SOUND0,-15,106,8
1600y=INT(peny/6):1x=INT(penx/6)
1610GOTO1540
1620PROC_printboard
1630:
1640REM move to next player
1650:
1660F=1-F
1670REM copy this go into last go
1680REM locations
1690:
1700y=INT(peny/6):1x=INT(penx/6)
1710ENDPROC
1720:
1730REM Check for win by each
1740REM Player. horizontal,
1750REM Vertical, diagonal.
1760:
1770DEFPROC_check

```

```

1780t=0:FOR I%=1 TO 3
1790t = t+board(1,I%)
1800NEXT:IF t=0 win=1:ENDPROC
1810IF t=3 win=2:ENDPROC
1820t=0:FOR I%=1 TO 3
1830t = t+board(2,I%)
1840NEXT:IF t=0 win=1:ENDPROC
1850IF t=3 win=2:ENDPROC
1860t=0:FOR I%=1 TO 3
1870t = t+board(3,I%)
1880NEXT:IF t=0 win=1:ENDPROC
1890IF t=3 win=2:ENDPROC
1900t=0:FOR J%=1 TO 3
1910t = t+board(J%,1)
1920NEXT:IF t=0 win=1:ENDPROC
1930IF t=3 win=2:ENDPROC
1940t=0:FOR J%=1 TO 3
1950t = t+board(J%,2)
1960NEXT:IF t=0 win=1:ENDPROC
1970IF t=3 win=2:ENDPROC
1980t=0:FOR J%=1 TO 3
1990t = t+board(J%,3)
2000NEXT:IF t=0 win=1:ENDPROC
2010IF t=3 win=2:ENDPROC
2020t=0:FOR J%=1 TO 3
2030t = t+board(J%,J%)
2040NEXT:IF t=0 win=1:ENDPROC
2050IF t=3 win=2:ENDPROC
2060t=0:FOR J%=1 TO 3
2070t = t+board(J%,4-J%)
2080NEXT:IF t=0 win=1:ENDPROC
2090IF t=3 win=2:ENDPROC
2100ENDPROC
2110:
2120REM incase of a win.
2130:
2140DEFPROC_win
2150PRINTTAB(5,2);STRING$(30," ")
2160PRINTTAB(5,2);name$(win-1)
    " is the Winner"
2170FOR L=1 TO 5:FOR S=50 TO 100
2180SOUND&11,-15,5,2
2190NEXT:SOUND1,0,0,8
2200NEXT
2210ENDPROC
2220:
2230REM In case of a draw
2240:
2250DEFPROC_draw
2260PRINTTAB(5,2);STRING$(30," ")
2270PRINTTAB(5,2);"A draw!"
2280FOR L=1 TO 5:FOR S=0 TO 50
2290SOUND&11,-15,5,2
2300NEXT:SOUND1,0,0,8:NEXT
2310ENDPROC
2320:
2330REM The lightpen Procedure
2340:
2350DEFPROC_quopen
2360LOCAL offset,width,scale
2370offset=2820:width=40:scale=1
2380 REPEAT
2390?&FE00=16:hipen=?&FE01
2400?&FE00=17:lopen=?&FE01
2410penpos=INT(hipen*256+lopen-offset)
2420peny=penpos DIV width
2430penx=INT((penpos MOD width)/scale)
2440 UNTIL ADVAL(1)/16>100
2450ENDPROC

```

PROGRAM POWER MICRO POWER

# Attention all ATOM Owners!!

Announcing the Software

# SPECTACULAR

from

# PROGRAM POWER



## MACHINE CODE MONITOR/DISASSEMBLER

- \*SINGLE STEP with REGISTER DISPLAY
- \*BREAKPOINT handling routines
- \*Tabulation Memory Dump with 'on screen' Editing (printer option)
- \*Memory Display—Hex, ASCII, Screen Code, Decimal & Binary
- \*SEARCH—Hex or ASCII string
- \*INTELLIGENT COPY
- \*COMPARISON of two memory blocks
- \*DISASSEMBLER (full feature)
- \*INCREDIBLE PRICE—ONLY £14.50

## TWO NEW 4K ROMS

## SUPER TOOLBOX

- \*SUPER-FAST Cassette Operation System with error checking, verify and append routines in addition to original 300/1200 baud.
- \*TOOLKIT functions—AUTO, RENUMBER, HELP, FIND, SPACE, APPEND, MEM, VAR, LVAR, DUMP, ZERO, HEX, IHEX, DELETE.
- OTHER FEATURES—Flashing Cursor, 2-key Rollover, Repeat Key, Fast Repeat.
- \*SUPER LOW PRICE—ONLY £14.50.

## PROGRAMMERS TOOLBOX

(PACKED 4K EPROM) £24.50


- \*1200 BAUD CASSETTE OPERATING SYSTEM
- \*VISIBLE LOAD & SAVE
- \*29 additional BASIC & TOOLKIT COMMANDS

## ROM SELECTOR BOARD

Suffering from congestion? Switch between up to 4 ROMS located at Hex A000. Assembled and tested unit with compact professionally produced PCB and good quality components. Fits easily into the Utility Socket (IC 24). The additional ROMS above make having a selector board at only £19.50 even more essential!

PROGRAMMERS TOOLBOX NOW ONLY £17.50

MACHINE CODE PROGRAM PRICES ARE TUMBLING!!




**Chess (12K)** Improved graphics, plays black or white, mid game level changes, look ahead up to eight moves, offensive, normal and defensive play. Ten sub-levels, casting, 'En passant' by player. Rejects illegal moves. Take back moves and action replay with take over. Set up problem games. £6.95.

**Hyperfire (12K colour)** Aliens have over-run six planets. Object to clear them. Super high speed action. Four defender ships. Hit alien fuel dumps and alien ships. Aircraft radar shows placement of approaching ships. Thruster control—including diagonal movement. Best sound effects yet! £6.95

**Dog Fight (12K)** Exciting, two player combat program—in HI RES Graphics. Defend your aircraft carriers and attack your opponents. Engage the enemy lighters in a battle to the death £5.95



**ASTROBIRDS (12K)** NEW version of this incredible GALAXIAN type game. Fantastic sound effects. Screaming missiles & swooping bird men. NOW DOUBLE SPEED OPTION. £5.95. **ADVENTURE (12K-NOT M/C)** ALL THE INTRIGUE AND FRUSTRATION OF A MAIN-FRAME ADVENTURE! Great skill and imagination are required to play this excellent game and you may still never exhaust all the possibilities £6.95.



**Cowboy Shoot-Out (12K)** Full feature, two player, arcade shooting game. Superb graphics and sound £5.95 **Stock Car (12K) HI RES.** Two Player contest around any of 16 different race tracks. Steering, acceleration and braking controls. Set the level of difficulty for driver and choose the no. of laps £5.95

WRITTEN ANY PROGRAMS! WE PAY 20% ROYALTIES FOR ATOM, NASCOM & BBC MICRO PROGRAMS

**SPACE FIGHTER (12K COLOUR)** Super High speed "Defender" game. 5 types of intelligent aliens. Repeating laser cannon, smart bombs, hi-score, rankings, bonus points, 6 skill levels. Exciting sound effects £6.95.

**INVADER FORCE (12K)** Terrific version of "Space Invader" 4 types of invaders, mother ship, great sound, hi-score, 6 skill levels £5.95

**ATOMSTORE (12K-NOT M/C)** Database filing & printing program, excellent value at only £6.95

PLEASE NOTE: WE ARE AUTHORISED DEALERS FOR ACORN ATOM, BBC MICRO & DRAGON 32

Please add 55p order P & P + VAT at 15%  
**MICRO POWER LTD.**  
 818A REGENT STREET,  
 CHAPEL ALLERTON  
 LEEDS LS7 4PE.  
 Tel. (0532) 683186

**ATOM SPECIAL OFFER**  
 Deduct £1 per cassette when ordering two or more.







Together Mike Chalk and Kansas bring you the first major arcade game for the BBC Micro . . .

# Galactic FIREBIRD

Those ever circling, swooping, diving Firebirds of the famous arcade machines, brought in all the glory of the BBC Micro's colours and sound.

Many programmers of many machines have tried to emulate the arcade game, Firebird, but nobody, the Americans included, has managed to get the circling, swooping firebirds on a computer. **Only Mike Chalk**

It is incredible how the Firebirds peel away, circle around in numerous positions on the screen, then suddenly sweep in to attack, all the while raining down their bombs.

Even if you manage to dodge all their bombs whilst shooting them down, it is as though they realise they will not get you this way, for without warning they'll take kamikaze action and come straight for you!

Then come the Astro Blasters, shooting down a solid energy bolt, to fry you completely, in addition to their own brand of super bomb. Oh, you can fire at them, but a solitary hit will have no effect whatsoever on these nasties.

As though Firebirds and Astro Blasters are not enough, as the game progresses, come the Megon Bombs. With no less than three hits needed to destruct! And you can't dodge them easily either, as their explosions spread.

Though the game starts with just the Firebirds, it progresses level after level, until ultimately the screen is full of Firebirds, Astro Blaster, Megon Bombs and other bombs raining down, until you are completely annihilated. Top score table of course. In full machine code.

**From Kansas - and only from Kansas**  
**£9.50 Vat and post paid**



As exotic illustrations usually hide third rate programs, here is the actual screen as seen during an advanced level of play.

## FASTEST SERVICE IN THE BUSINESS

As the oldest software publishers in the business, literally thousands of TRS-80 and Video Genie users are fully aware of the Kansas method of doing business. If as a BBC Micro user, we are new to you, then let's explain: We operate the fastest software postal service in the country! Every single order is despatched by first class post the very same day it is received. You see, as the actual publishers we own the programs (unlike the software houses who retail others) which means every single program is always in stock. We even go to the expense of a private Post Office collection, every working day at 4.30 pm! The faster metered mail of course. No matter whether you order by cheque or credit card, you order still goes the same day as received. In fact, if you order by credit card over the telephone up to 4 pm, you will get your program tomorrow! Or else, leave your order on our telephone answering machine after hours, if you want to take advantage of the cheaper rate.

## Guarantee

Every single program is guaranteed for life! Which means if it fails, no matter how caused, it will be replaced absolutely free of charge this year next year or in ten years.

# Kansas

Brand leader in microcomputer software Tel: 0246 850357

Kansas City Systems, Unit 3, Sutton Springs Wood, Chesterfield, S44 5XF.



# SIR Computers Ltd

## CARDIFF

Agents for Acorn, BBC and TORCH Computers

### BBC Microcomputers

Model A with 32K RAM and VIA.....	£339.00
Model A with 32K RAM, VIA and Joystick port.....	£354.00
Model B.....	£399.00
Model B with disc interface.....	£509.00
Single 100K disc drive.....	£249.00
Dual 2x100K disc drive.....	£389.00
The disc manual and utilities disc are both included.	
Disc interface for the BBC Micro (kit).....	£ 95.00
(fitted).....	£110.00
Upgrade of BBC Model A to B.....	£ 90.00

Please telephone for up to date information on Prestel, Teletext, speech synthesis, second processors, etc.

### TORCH Computers

Z-80 Disc Pack for the BBC Microcomputer..... £895.00  
 This unit connects to the BBC Micro in the same way as a normal disc drive, but as well as offering a dual 2x400K disc drive for use under BBC BASIC or other languages it provides the option of using the wide range of CP/M software available for business and data processing applications. The firmware supplied with the machine allows switching between BASIC and CP/M, a powerful operating system developed from CP/M 2.2.  
 In addition to the disc pack a second processor is supplied. This is a Z-80A with its own 64K RAM card, communicating with the 6502A in the BBC computer through the 'Tube'. Typically the speed of execution of programs under the twin-processor system is increased by up to 50% compared with a conventional single-processor computer.  
 A third processor, the 16 bit 68000, will shortly be available.

TORCH CF240..... £2795.00  
 (Ex. VAT)

This is an extension of the BBC microcomputer/Torch disc pack system, available in a single unit. The computer contains a BBC based peripheral processor connected to the main Z-80 computer, a dual 2x400K disc drive as described above, a high resolution (80 character) colour monitor and a complete British Telecom approved 1200 baud modem. It is the only microcomputer which has been granted permission for direct connection to the Public Switched Telephone Network both in the UK and the United States.

The TORCH can communicate either directly with another TORCH or with virtually any other type of computer via Prestel. Using the Gateway facility of Prestel it is possible for the TORCH to access vast amounts of information stored by private organisations on public database systems. The Mailbox facility of Prestel also allows the use of electronic mail.

TORCH CH240/10 As above but with a 10 MB hard disc drive.  
 TORCH CH240/21 As above but with a 21 MB hard disc drive.

### Peripherals

Seikosha GP 100A printer.....	£229.00
Epson MX 80 F/T type 3 printer.....	£389.00
NEC PC 8023 printer.....	£389.00
Microvitec 14" RGB Monitor.....	£299.00
Kaga 12" RGB Monitor.....	£280.00
Sanyo 14" RGB Monitor.....	£260.00
High resolution 12" black/green monitor.....	£ 85.00

### Software

We currently hold in stock programs from the following suppliers:

Acornsoft	Level 9 Software
A & F Software	Molemerx
Bug Byte	MP Software
Computer Concepts	Program Power
Digital Fantasia	Salamander Software
Golem	Software for All
IJK Software	Superior Software

Unfortunately we are unable to supply software by mail except as part of a larger order.

Delivery by Interlink of any of the above items..... £ 10.00  
 Unless otherwise stated all prices include VAT.

**SIR Computers Ltd**  
**91 Whitchurch Road**  
**Cardiff**  
**Telephone (0222) 21341**

## COMPUTER MAINS INTERFACE

Five Computer controlled 13 Amp socket outlets, each capable of switching loads up to 13 Amp. Allows implementation of Industrial and Home automation systems without electrical experience. All outlets have indicator lights which make the unit ideal for Educational use. Easy to use, just plug in to a 13 Amp socket and into your Computer and then load the Demonstration Cassette provided. Low voltage or mains inputs can be supplied to allow your computer to monitor limit switches, thermostats, flow detectors, pressure switches etc.

★ for BBC(B), PET, VIC, COM 64, NASCOM .....	£65
★ BBC (A) .....	£69
Optional Extras—	
★ 2 Mains Input Ports .....	£7

Other options available. Hardware and Software available for most applications.

## BBC ANALOGUE INTERFACE

Allows your Computer to monitor and plot variables such as voltage, current, resistance, pressure, weight, temperature, speed, lighting and sound levels, pH etc.

★ Interface adapter with 30V dc and 300V ac .....	£66
plug in Modules	
★ Extra plug in Modules (up to 4 may be fitted)	
AC Modules 300V, 30V, 3V .....	£12
DC Modules 300V, 30V, 3V .....	£12
Temperature Module and Detector .....	£20

Other Modules available, including Input and Output ports. S.A.E. for details.


## BBC UPGRADES

★ 32K Memory Upgrade .....	£21
★ User/Printer Port .....	£8.75
★ Analogue Port .....	£7.70
RGB Serial I/O Kit .....	£8.70
Tube/Bus Kit .....	£7.00
Recorder lead with any type plugs .....	£2.00
★ All Accessories include demonstration programs.	

All prices include p.p. & VAT

## COMPUTER ACCESSORIES

69 Well Heads, Thornton, Bradford BD13 3SJ  
 Tel: (0274) 833742



**M I C R O D A T A**

4 Greenbarn Way  
 Blackrod  
 Lancashire  
 BL6 5TA

Tel 0204 694265

## A NEW CONCEPT IN SOFTWARE PUBLISHING

### BEEBTAPE

Tired of typing published program listings into your BBC Microcomputer? Fed up paying high prices for mediocre software? Now BEEBTAPE is here with a wide range of software without typing!

BEEBTAPE is a bi-monthly cassette of programs to run on your BBC Microcomputer. Each issue contains at least five programs and covers a broad range of interest. Our launch issue has two great games, Crawler and Runners, a critical path analysis program and two utilities - one which dumps blocks of memory either to the screen or a printer in hex format, and another, called Sound Workshop, which gets the best out of the SOUND and ENVELOPE commands by continuously displaying all parameters on screen and allowing them to be edited, compared and tested.

BEEBTAPE is available by annual subscription at £21 or a sample issue for £5. At five programs per issue you will receive at least thirty programs in a year. That's 70p per program.

**ACCESS TELEPHONE ORDERS WELCOME**

## MULTI-CHOICE

This program is a multiple choice quiz. It contains 10 questions relating to the BBC micro. All input during the program is by lightpen and readers will note the use of sound cues for correct/incorrect answers.

As the number of BBC micros in schools is continually increasing, I should mention that teachers who wish to use this sort of program must give adequate thought to the data to be employed. The incorrect answers

(called distractors) need to be produced so they are believable, and should always indicate the problem experienced by the child who gives that distractor as an answer. They should also statistically attract a percentage of children answering the test.

The first thing to change would be the title on lines 520 and 530. The only other amendments would be to changing the data, which begins at line 1490. To change the data, simply delete from 1490 to the end of the

program. Next rewrite the data lines in order 'question', 'answers', 'correct answer number'; eg:

```
1490 DATA "This is Qu 1"
1500 DATA "ans 1", "ans 2"
1510 DATA "ans 3", "ans 4"
1520 DATA "ans 5", 3
```

Note the 3 indicates that answer 3 is correct.

Do this for each of the questions as needed. The last DATA line must be DATA "END". The program will automatically score for quizzes of any number of questions.

```
10REM*****
20REM*
30REM* MULTI-CHOICE QUIZ *
40REM*
50REM* FOR LIGHT PEN *
60REM*
70REM* J. TELFORD 1983 *
80REM*
90REM*****
100MODE7
110REM Set error checking
120 ON ERROR GOTO300
130REM Startup Program
140DIM yloc(5), answer$(5)
150REPEAT
160RESTORE
170PROC_setup
180PROC_title
190REM Loop through questions
200REPEAT
210PROC_getquestion
220IFq$="END" DONE=-1:GOTO260
230PROC_displayquestion
240PROC_getanswer
250PROC_checkanswer
260UNTIL DONE
270PROC_score
280UNTIL FNagain(T#)="NO"
290CLS:PRINT "Bye":END
300CLS:REPORT:PRINT " at ";ERL
310PRINT "Bye":END
320:
330REM NOW FOR PROCS
340:
350REM Procedures start here.
360DEFPROC_setup
370CLS
380FOR J% = 0 TO 5
390READ yloc(J%)
400NEXT
410no_of_questions=0
420no_correct=0
430DONE = 0
440red$=CHR$(129)
450green$=CHR$(130)
460yellow$=CHR$(131)
470target$=CHR$(255)
480ENVELOPE1,0,2,-2,2,6,12,6,127,0,0,
-127,126,0
490ENDPROC
500:
510DEFPROC_title
"Multiple Choice Quiz"
520PRINTTAB(9,10);yellow$;
530PRINTTAB(10,12);yellow$;
"For the BBC Micro."
540PRINTTAB(9,18);"Pen here to start
]target$; "["
550REPEAT:PROC_quopen
560UNTIL penx=29 AND peny=18
570VDU7
580ENDPROC
590:
600DEFPROC_getquestion
610READ q$:IF q$="END" ENDPROC
620FOR J%=1 TO 5
630READanswer$(J%)
640NEXT
650READ correctanswer
660ENDPROC
670:
680DEFPROC_displayquestion
690CLS
700no_of_questions=no_of_questions+1
710PRINTred$;"Question No: ";
720PRINT;no_of_questions;TAB(20);
730PRINT"Score: ";no_correct
740PRINTred$;STRING$(38,"_")
750PRINTTAB(0,yloc(0));q$
760FOR J%= 1 TO 5
770PRINTTAB(0,yloc(J%));"]";target$; "["
780PRINTTAB(5,yloc(J%));yellow$;
790PRINTanswer$(J%)
800NEXTJ%
810PRINTTAB(0,18);"Pen to line of
correct answer."
820ENDPROC
830:
840DEFPROC_getanswer
850REPEAT:PROC_quopen
860UNTIL penx<3 AND (peny>=yloc(1)
AND peny<=yloc(5))
870VDU7
880ENDPROC
890:
900DEFPROC_checkanswer
910IF yloc(correctanswer)=peny
THEN PROC_correct ELSE PROC_wrong
```



```

920PROC_cont
930ENDPROC
940:
950DEFFPROC_correct
960SOUND1,1,149,8
970no_correct=no_correct+1
980PRINTTAB(0,20);green#;
    "That was correct"
990ENDPROC
1000:
1010DEFFPROC_wrong
1020SOUND0,-12,106,8
1030PRINTTAB(0,20);red#;"The correct
    answer was: -"
1040PRINTred#;answer$(correctanswer)
1050ENDPROC
1060:
1070DEFFPROC_cont
1080PRINTTAB(5,23);"Pen here to go on
    J";target#;"[";
1090REPEAT: PROC_quopen
1100UNTIL pen# =24 AND peny=23
1110VDU7
1120ENDPROC
1130:
1140DEFFPROC_score
1150CLS:PRINT""yellow#"You scored ";
1160PRINT;no_correct*100/no_of_questions;
1170PRINT"%";
1180ENDPROC
1190:
1200DEFFNagaiH(T#)
1210PRINTTAB(5,10);green#"Another go?"
1220PRINTTAB(5,12)"J";target#;"[" YES"
1230PRINTTAB(5,14)"J";target#;"[" NO"
1240REPEAT: PROC_quopen
1250UNTIL pen# =6 AND
    (peny = 12 OR peny = 14)
1260VDU7
1270 IF peny =12 THEN ="YES" ELSE ="NO"
1280:
1290DEFFPROC_quopen
1300LOCAL offset,width,scale
1310offset=10248;width=40;scale=1
1320REPEAT
1330:
1340?&FE00=16;hipen=?&FE01
1350:
1360?&FE00=17;lopen=?&FE01
1370penpos=INT((hipen*256+lopen)-offset)
1380peny=penpos DIV width
1390pen# =INT((penpos MOD width)/scale)
1400UNTIL ADVAL(1)/16>100
1410ENDPROC
1420:
1430REM Y-locations of answer lines
1440:
1450DATA4,8,10,12,14,16
1460:
1470REM Each question
1480:
1490DATA"What is the type of main
    processor fitted to the BBC micro?"
1500DATA"The 6800","The 8080"

```

```

1510DATA"The 6502","The Z80"
1520DATA"The 6522",3
1530:
1540DATA"What is the type of I/O
    port used by the BBC Micro?"
1550DATA"The 6205 VIA","The 8255 PIA"
1560DATA"The 8255 VIA","The 6522 VIA"
1570DATA"The 6522 PIA",4
1580:
1590DATA"Which Chip allows the
    use of the Light Pen?"
1600DATA"The 6845 CRTIC"
1610DATA"The D7002C ADC"
1620DATA"The 74LS00 gate"
1630DATA"The 6522 VIA"
1640DATA"The Video ULA",1
1650:
1660DATA"Which Area of Memory is
    assigned to Controlling I/O?"
1670DATA"Fred","Jim","John","Ethel"
1680DATA"Shiela",5
1690:
1700DATA"If we were controlling an
    extra VIA from the BBC Micro,
    which socket would
    we connect to?"
1710DATA"Disc interface","User port"
1720DATA"Printer port",1M Hz Bus"
1730DATA"The Tube",4
1740:
1750DATA"Using the RS432 Port,
    what is the
    fastest transmission
    speed available?"
1760DATA"1200 Baud","19200 Baud"
1770DATA"9600 Baud","1M Hz","2M Hz"
1780DATA2
1790:
1800DATA"Which of the following EPROMS
    cannot be used in the BBC Micro?"
1810DATA"2732 4K","2764 INTEL 8K"
1820DATA"2764 HITACHI 8K"
1830DATA"2712B 16K","2716 2K",5
1840:
1850DATA"What is the current level of
    Operating System for the BBC Micro?"
1860DATA"OS V1.20","OS V2.00"
1870DATA"OS V1.00","OS V0.10"
1880DATA"OS V0.01",1
1890:
1900DATA"Which Software Pack is not
    available on the BBC Micro?"
1910DATA"LISP","PILOT","FORTH"
1920DATA"WORDPROCESSING","BASIC",2
1930:
1940DATA"Who is Education Manager
    for ACORN?"
1950DATA"Tony Quinn"
1960DATA"Herman Hollerith"
1970DATA"Shirley Williams"
1980DATA"John Coll"
1990DATA"Jane Fransella",4
2000:
2010DATA"END"

```

# INDIRECT ADDRESSING

When dealing with large tables or lists of data it is useful to have instructions that allow you to read from or write to a variable or computed address. Indexed addressing, where the position of the data is calculated by adding the contents of the X or Y register to a base address, is helpful, but is restricted to a range of 256 locations about the base address. For example, LDA &2000, X would only allow access to locations between &2000 and &20FF.

The technique of indirect addressing solves this, and allows you to work with a 'variable' address anywhere within memory.

The simplest instruction that uses the technique is the indirect JMP. Although not involved with reading or writing data to memory it serves as a useful introduction. Like the normal absolute JMP instruction, the indirect JMP transfers program control to a new position in memory. However, the address that follows the indirect JMP is not the address the program jumps to. Instead it acts as part of a pointer or vector to the final location. Confused? The example of JMP(&1800) should help. Note how the brackets are used in assembly language to distinguish the JMP indirect from the JMP absolute instruction.

The address program control passes to is stored in two memory locations - &1800 and &1801. Figure 1 shows how the first location contains the low byte of the address (ADL) and the second the high byte (ADH).

Program 1a shows a simple routine that uses the JMP indirect instruction as part of a program loop to fill the screen with the letter A. Memory locations &2150 and &2151 act as vectors pointing to the start of the program at &2000. Program 1b shows a small but useful refinement used to load the ADL and the ADH bytes of the label START into the indirection pointers vector and vector +1. The low byte is obtained in line 70 using the

**Tony Shaw and John Ferguson show how to work with a variable or computed address in memory**

```


a 10 MODE7
   20 REM JUMP INDIRECT INSTRUCTION
   30 OSASCII=&FFEE
   40 VECTOR=&2150
   50 P%=&2000
   60[
   70 START LDA #00 \LOW BYTE OF "START"
   80     STA VECTOR
   90     LDA #&20 \HIGH BYTE OF "START"
  100     STA VECTOR+1
  110     LDA #ASC("A") \ASCII "A"
  120     JSR OSASCII \PRINT "A"
  130     JMP (VECTOR) \BACK TO START
  140]
  150 END
>RUN
2000
2000 A9 00 .START LDA #00 +LOW BYTE OF "START"
2002 8D 50 21 STA VECTOR
2005 A9 20 LDA #&20 +HIGH BYTE OF "START"
2007 8D 51 21 STA VECTOR+1
200A A9 41 LDA #ASC("A") +ASCII "A"
200C 20 E3 FF JSR OSASCII +PRINT "A"
200F 6C 50 21 JMP (VECTOR) +BACK TO START

b 70 START LDA #START MOD 256 \LOW BYTE OF "START"
   80     STA VECTOR
   90     LDA #START DIV 256 \HIGH BYTE OF "START"
  100     STA VECTOR+1
  
```

**Program 1. (a) Example using indirect jump  
(b) Using MOD and DIV to find ADH and ADL of label**

MOD function to obtain the remainder when START (&2000) is divided by 256. In a similar manner line 90 finds the high byte of START using DIV to give the whole number part of the division.

But why bother with complicated indirect jumps when an absolute jump would perform the same job? In the simple example above there is no advantage. However, one application where indirect jumps do prove useful is in maintaining a fixed entry point to a subroutine that can be 'redirected' to perform different tasks. For example, the operating system routine OSWRCH (&FFEE) is used by the BBC micro to write characters on the screen. The first instruction in this routine is JMP (&020E) with an indirect jump through WRITE CHARACTER VECTORS

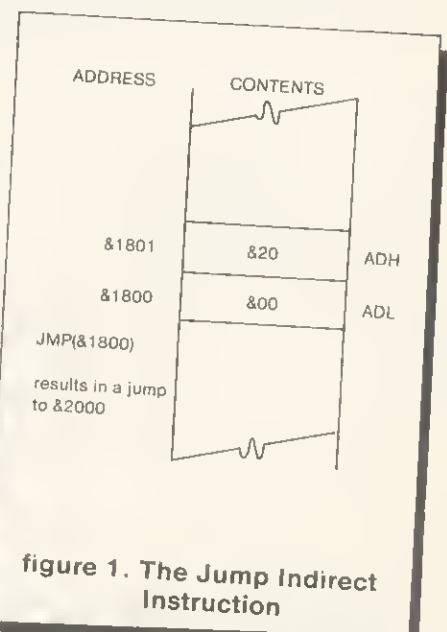

**figure 1. The Jump Indirect Instruction**



&020E (WRCHV). Whenever the operating system wishes to alter the effect of OSWRCH, eg to direct output to a printer or modem, all it has to do is to change the contents of the vectors in RAM to point to a different output handling routine. The entry point to the subroutine OSWRCH remains fixed.

Program 2 uses this technique to convert all upper case characters sent to the screen to lower case. It starts by altering WRCHV and WRCHV+1 to point to a new output handler routine starting at OUT. The new routine intercepts all characters from the operating system and converts those with ASCII codes > &40 to lower case. (A close look at the ASCII code table shows this is easily done by forcing bit five in the ASCII code to a one). After the change, characters are then allowed to pass down the normal output channel to the screen.

Upon executing the routine all future operations with the screen will produce lower case characters. The sample Basic program shows a typical display with Basic keywords in lower case. To return to normality, press the BREAK key and the operating system initialisation program will restore the original values to WRCHV and WRCHV+1.

Unfortunately, 'straightforward' indirect addressing is not available for LDA, STA and CMP instructions. Instead the microprocessor uses a more complex form of indirect addressing that involves either the X or Y index register.

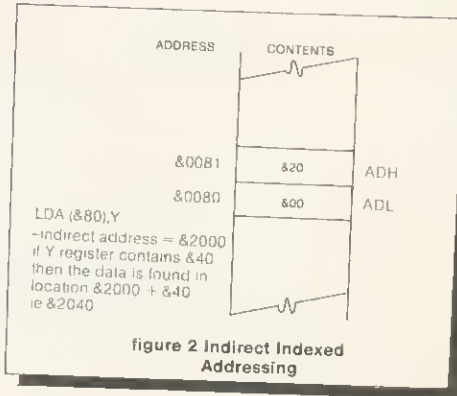


figure 2 Indirect Indexed Addressing

Indirect indexed is really three modes in one combining indirect addressing together with zero page and indexed - Y. It sounds horrific, but let's examine a typical instruction. Like the indirect jump, brackets are used in assembly language to define indirect addressing. Hence:

```
LDA (&80)
```

would mean 'load the accumulator with the contents of the memory location pointed to by the contents of zero page locations &0080 and &0081'. Just as with the indirect jump instruction &80 contains the ADL and &81 contains the ADH.

Regrettably this simple instruction does not exist. The real instruction takes the form:

```
LDA (&80), Y
```

with the contents of the Y register added to the address found in the vectors (figure 2). The vectors *must* lie in zero page.

Indexed indirect is again a combination of three addressing modes,

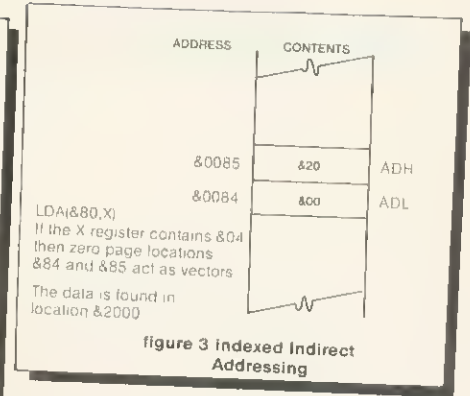


figure 3 indexed Indirect Addressing

but this time the X register is used. A second difference lies in the order in which the modes are applied. In the previous case the indirect address was evaluated before the index was added on. With this mode the indexing is performed on the zero page vectors before the indirect address is evaluated.

The example of LDA(&80,X) should help. If the X register contains four then locations &0084 and &0085 would be used as the ADL and ADH vectors to the final location containing the data (figure 3).

For many applications the added complexity of using the X or Y registers is not required. With both indirect indexed and Indexed indirect the programmer can read or write data to any location within memory by merely altering the contents of the zero page pointers. Program 3 illustrates the technique using zero page pointers POINT and POINT+1 to store characters entered from the keyboard in an

```

10 REM CHANGING UPPER TO lower CASE
20 REM BY ALTERING "WRITE CHARACTER VECTORS"
30 OSWRCH=&FFEE
40 WRCHV=&020E:REM WRITE CHARACTER VECTORS
50 FOR PASS=0 TO 3 STEP 3
60 PX=&0D01
70[OPT PASS
80.START LDA #OUT MOD 256 \ POINT TO LOW BYTE
90      STA WRCHV          \ OF NEW OUTPUT ROUTINE
100     LDA #OUT DIV 256 \ POINT TO HIGH BYTE
110     STA WRCHV+1      \ OF NEW OUTPUT ROUTINE
120     RTS              \ BACK TO BASIC
130.OUT  CMP #&40 \ CONVERT CODES > &40
140     BCC MISS
150     ORA #&20 \ SET BIT 5 ie CHANGE TO LOWER CASE
160.MISS JMP &E099 \ DOWN NORMAL CHANNEL TO SCREEN
170]
180 NEXT PASS
190 CALL START
    
```

```

>list
10 for n=1 to 10
20 print"fido"
30 next n

>run
fido
fido
fido
fido
fido
fido
fido
fido
fido
fido
    
```

Sample screen output

Program 2. Redirecting OSWRCH to produce lower case characters

ASCII text file starting at &2000. The program begins by initialising X to zero and setting the vectors to point to the first location in the file (&2000). The operating system routine OSRDCH is used to obtain a character from the keyboard which is then sent via OSASCI to the screen before line 160 stores it in the file. Although indexed indirect addressing was used, indirect indexed addressing with Y = 0 would perform the same job.

An underline character (ASCII &5F) marks the end of the file returning control to Basic. Lines 190 to 220 increment the storing pointers to point to the next available location in the file and ensure POINT+1 is only incremented whenever the low order vector reaches zero. (Note - no limitation is made on the maximum size of the text file.)

When assembled the routine sits in page D out of the way of Basic. Line 40 configures function key one to execute the program. Program 4 shows a short Basic program that can be used to display the text file.

Finally, the routine given in program 5 enables the BBC micro to execute a series of commands entered using the simple editor of the previous program. After executing program 5, the machine will obey each instruction within the text file as if it came directly from the keyboard, following each command until the end of file character (&5F) is read.

Figure 4 shows a typical command file entered using the editor and figure 5 follows the machine's activity while executing the file.

Program 5 begins by altering the Read Character Vectors (RDCHV) to point to the new input routine 'IN'. After returning to Basic the machine operating system is directed to 'IN' instead of the keyboard to obtain commands. Subroutine 'IN' begins by saving the X register in location &82. Indirect addressing is then used to obtain a character from the command file which is passed to the operating system. When the end of file character is read, the contents of the input vectors are returned to their original values and the keyboard re-enabled.

```

)LIST
10 REM PROGRAM PROVIDES A SIMPLE EDITOR
20 REM TO STORE TEXT FROM &2000 UP.
30 REM KEY1..ENTER TEXT FILE
40 *KEY1"CALL&0D50:IM"
50 OSRDCH=&FFED
60 OSASCI=&FFED
70 POINT=&80:REM ZERO PAGE POINTERS
80 FOR PASS =0 TO 3 STEP 3
90 PX=&0D50
100]OPT PASS
110.start LDX #0:STX POINT \SET X=0 AND POINT
120     LDA #&20:STA POINT+1 \TO &2000
130     LDA #ASC("+"):JSR OSASCI \PLACE "+" ON SCREEN
140.again JSR OSRDCH \GET KEY
150     JSR OSASCI \ONTO SCREEN
160     STA (POINT,X) \STORE IN TEXT FILE
170     CMP #&5F \IS IT END "-"?
180     BEQ fin \
190     INC POINT \UPDATE POINTERS
200     BNE again \BACK FOR MORE
210     INC POINT+1
220     JMP again \BACK FOR MORE
230.fin: RTS \BACK TO BASIC
240]
250 NEXT PASS
260 END

```

```

)LIST
10 REM DISPLAY TEXT ROUTINE
20 MODE7:N=&2000
30 REPEAT
40 AX=?N:CALL &FFED
50 N=N+1
60 UNTIL AX=&5F(" ")

```

▲ Program 3. 'Editor' program to generate text file (use mode 7 on model A to avoid corruption by screen)

◀ Program 4. Basic listing to display text file

▼ Program 5. 'Execute' program enables text file to act as command file

```

10 REM PROGRAM TO EXECUTE TEXT COMMAND FILE
20 REM KEY2..EXECUTE TEXT FILE
30 *KEY2"CALL&0D01:IM"
40 POINT=&80:REM ZERO PAGE POINTERS
50 XSTORE=POINT+2:REM STORE FOR "X"
60 RDCHV=&0210:REM READ CHARACTER VECTOR
70 FOR PASS=0 TO 3 STEP 3
80 PX=&0D01
90]OPT PASS
100.start LDX #IN MOD 256:STA RDCHV \POINT VECTORS
110     LDA #IN DIV 256:STA RDCHV+1 \TO NEW INPUT ROUTINE "IN"
120     LDA #0:STA POINT \SET UP POINTERS
130     LDA #&20:STA POINT+1 \TO "&2000"
140     RTS \BACK TO BASIC
150.IN: STX XSTORE \STORE X
160     LDX #0 \SET X=0
170     LDA (POINT,X) \GET BYTE FROM FILE
180     CMP #&5F \END OF FILE CHARACTER?
190     BEQ FINI \THATS THE LOT
200     PHA \STORE ON STACK
210     INC POINT \UPDATE POINTERS
220     BNE HERE
230     INC POINT+1
240.HERE PLA \RECLAIM "a"
250     LDX XSTORE \RECLAIM "x"
260     CLC \DECLARE VALID CHARACTER
270     RTS \INTO THE OPERATING SYSTEM
280.FINI LDA #&89:STA RDCHV \BACK TO NORMAL INPUT
290     LDA #&DE:STA RDCHV+1
300     LDX XSTORE \RECLAIM "x"
310     JMP (RDCHV) \BACK TO KEYBOARD
320]
330 NEXT PASS
340 END

```

```

+NEW
PRINT"NOTHING THERE"
PRINT"I WILL NOW ENTER A PROGRAM"
10 MODE7
20 PRINT"FRED"
30 END
PRINT"I WILL NOW RUN PROGRAM"
RUN
LIST
PRINT"THATS THE LOT"
NEW
LIST
->

```

Figure 4. Example command file

```

)NEW
)PRINT"NOTHING THERE"
NOTHING THERE
)PRINT"I WILL NOW ENTER A PROGRAM"
I WILL NOW ENTER A PROGRAM
)10 MODE7
)20 PRINT"FRED"
)30 END
)PRINT"I WILL NOW RUN PROGRAM"
I WILL NOW RUN PROGRAM
)RUN
FRED
)LIST
10 MODE7
20 PRINT"FRED"
30 END
)PRINT"THATS THE LOT"
THATS THE LOT
)NEW
)LIST

```

Figure 5. Machine activity while executing command file in figure 4



EXTENDED COLOUR-FILL GRAPHICS  
E.C.F.G. GIVES YOU A CHOICE OF  
**!! 4 BILLION + !!**

SHADES FOR TRIANGLE FILLING  
IN BBC MODES 0,1,2,4 & 5

- \* PLOT 81 and 85 commands for triangle-filling have been adapted to use the ECFG fill-shade currently selected by new ECFG user-friendly commands. GCOL is still used for line colour.
- \* Easy choice of 17, 289 & 6561 subset colours between those normally available in 2, 4 & 16 colour MODEs. Further options include colours, angles, spacings & widths of cross-hatch etc.
- \* ECFG commands can be used in BASIC, typed from the keyboard, accessed in Assembler, or in future BBC Micro languages. ECFG is MOS-adaptive, and proven with versions 0.1 to 1.2
- \* Bootstrap from cassette rapidly builds an ECFG module at a RAM address pre-defined by PAGE, which is then automatically increased 512 bytes to allow immediate LOADING of programs etc.

Price : £10 inc : Mail Order only

**GAELSETT (ECFG)**

44 EXETER CLOSE, STEVENAGE, HERTS. SG1 4PW.

(Tel. Stevenage 51224)



Photos: Malcolm Aird



# Primary maths and micros

In January's *Acorn User*, Heather Govier wrote of using micros to enrich and extend the primary school curriculum. Teachers with an interest in maths will also want to examine the micro's role in relation to the *Cockcroft Report*, and in particular to paragraph 243 which issues the following challenge. Maths teaching, it states, should provide opportunity for:

- exposition by the teacher;
- discussion between teacher and pupils and between pupils themselves;
- appropriate practical work;
- consolidation and practice of fundamental skills and routines;
- problem-solving, including the application of maths to everyday situations;
- investigational work.

Most people in maths education today would agree that the first and fourth activities predominate in junior and secondary schools, although less so in infant schools where practical work is much more common. If the micro is to do more

than merely enliven work, we must hunt down or create software that will promote other activities on the list. The relative scarcity of the micro as a resource makes the need for good software imperative. Drill programs have to be used individually and it is unlikely there will be enough machines in a primary school to make this feasible.

There is no doubt drill on the micro is more popular than drill from many current textbooks; and informal research shows children can complete up to four times as much work using the micro as they can with pencil and paper. This gives more time for the other activities advocated by Cockcroft, but the general theme of both the *Cockcroft Report* and *Mathematics 5-11* is that such skills could be better developed, with better pacing of pupils and faster recall of basic facts, if more work were done orally.

Many activities, such as testing tables or performing routine calculations, are catered for by such toys as *Little Professor* or

*Ruth Townsend and Paul McGee advise on the choice, and use of, software for teaching mathematics to primary pupils. Good programs are the only way to develop the potential of the micro – but some topics are best left to other tools, such as Bigtrack or Simon.*

*We list some good sources of software and advice on page 48, while three educational programs are reviewed on page 51.*






*Dataman.* These are much cheaper than a computer and can be purchased in sufficient quantity to allow a large number of pupils to use them at the same time. Both can be programmed to give various activities at different levels of difficulty. They provide valuable protection against practising errors and give the instant feedback pupils enjoy from a computer. If the school is following Cockcroft's advice and developing work with calculators then simple consolidation exercises can be made enjoyable and instructive at no extra cost.

There are many programs which aim to help pupils with their maths by helping them to develop a longer attention span and the ability to concentrate on details. These activities can easily and more cheaply be carried out using a simple game called *Simon* which asks children to repeat lengthening series of sounds related to flashing lights. *Simon* obviously lacks the flexibility of a computer program but do many primary school teachers spend much time altering programs to suit their specific needs? Instead of rewriting textbooks, teachers choose the material which best meets their requirements and budgets, and they should do the same for work with computers in maths.

However, the classroom management problem remains and opportunities for enrichment are wasted if the micro is overused for drill and practice. (Those outside education produce a multitude of simple arithmetic drill programs, which can generally run on the cheaper home computers, and teachers who have ZX81s or the like may find a use for them in these areas.)

Of those programs which work on the micro supported by the Dol scheme, *Trains* (from NECOPS) is fun. Its title frame calls this 'arithmetic training' and that is all it is, but it has the features demanded of a drill program: rewards for success, a timing feature and flexibility of levels. It can neither teach nor diagnose – reassuring to those who make their money by these skills!

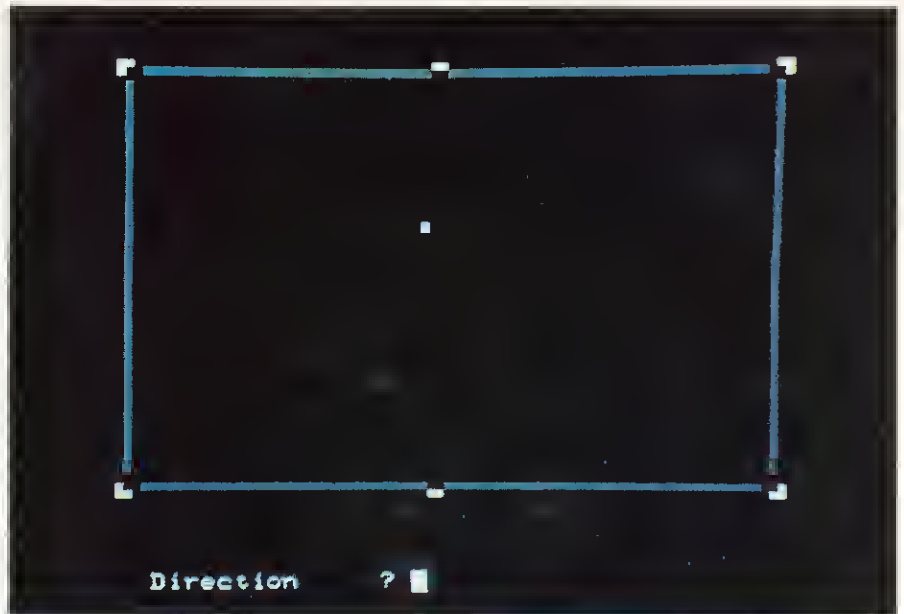

## Small groups and discussion

Good programs for small groups rather than individuals aim to promote discussion between pupils. Nothing does this better than a game which practises and applies a skill. Two favourites for the primary school both come from SMILE.

The first is *Elephant* where the task is to locate an elephant hiding in a grid of New York streets. After each guess the micro tells the users their distance from the elephant. Pupils develop strategies and discuss the relative merits of proposed guesses. Achieving problem-solving and discussion with one simple program must enrich the mathematical diet.

*Snooker* should carry a warning about potential addiction. The object is to pot a ball in one of the pockets by stating the angle of the course in which the ball is to move. The pupil is thus applying skills of estimating angles.

Top, Snooker; above Boat



For group work, *Ergo* and *Subgame*, from the Shell Centre, again promote discussion. In *Ergo* the micro generates a five-by-five grid of whole numbers following a rule. The user's task is to fill in any of the numbers by moving the cursor. Incorrect inputs are given the response 'too high' or 'too low'. There are two levels of difficulty, the harder would probably be beyond most juniors, but it is a robust program which practises the skills of number pattern work.

*Subgame* does nothing that could not be done with marked cards and an outline subtraction sum, but has proved successful in the classroom. Both the user and the micro have to place randomly produced digits into a subtraction sum so as to maximise the answer. To play it successfully needs a strong sense of place value and subtraction. There is a restrictive algorithm which gives the user the answer at a fixed stage but it is still worth using.

The most discussed mathematical programs at present rate are *Jane* and *Logo*, both of which will be used most profitably in small groups. *Jane* is available, with extensive notes, from Longmans

Micro Software. It is the 'function game' used for years in progressive maths lessons based on the format of input/operation/output. Functions are given boys' and girls' names, where the default conditions are that boys add and girls multiply, although the precise operations can be set differently. It has potential which a brief review cannot do justice to, and is well worth viewing at your local teachers' centre.

The same is true of any version of *Logo* whose application goes beyond maths. The way it helps to develop the concept of angle measure, the nature of a program and variables, and a structured approach to problem-solving make it a must for maths lessons. The most easily available version, suitable for all the Dol approved machines, comes in the *Logo Challenge* package from Addison-Wesley. It's beneficial to use *Bigtrak* before using *Logo* and a recent MEP publication is helpful.

## Problems and investigations

The MEP *Micro-primer* pack contains two mathematical programs which at first glance seem to demonstrate the micro's capacity to stimulate practical work and investigations.

First there is *Shopping* which takes pupils (or significantly, one pupil!) on a shopping trip. There are representations of a shopping list and some coins, and it is hard to see how this activity is better than handling either real money or plastic money. This is typical of programs which are written to satisfy some craving which the programmer had, presumably the desire to prove that coins could be drawn on the screen. No doubt there will soon be programs which simulate structural apparatus, measuring equipment, attribute blocks and the like. The optimist will see this as motivating practical work away from the micro, but pessimists

will fear that equipment will return to the dust of the stock cupboard.

The other MEP mathematical offering is *Farmer* where the user is invited to solve the farmer/dog/children/grain crossing-the-river problem. It makes good use of the micro because pupils are invited to participate, but is not nearly as rich in potential as the similar *Boat* (from SMILE). This program is also about crossing rivers but leads to a worthwhile investigation.

A good investigational program for small groups must generate plenty of work away from the micro and exploit its ability to support conjectural work in maths. There are few such programs available at primary level as yet, but other examples are *Frogs* (from SMILE) and *Jugs* (from Davidson Centre, Croydon).

### HOME STUDY COURSES

You've chosen the best micro, now choose the best courses!

#### 30 Hour BASIC

A beginner's BASIC programming course.

#### Structured Programming in BASIC

A second stage BASIC programming course.

Shows you how to get the best out of BBC BASIC.

#### Beyond BASIC on the Beeb:

6502 Assembly Language Programming

An easy introduction to assembly language programming on the BBC Micro.

All 3 courses available now as NEC correspondence courses. Write for free leaflet/enrolment form.

(30 hour BASIC text only is available, price £5.95 post free.)

#### NATIONAL EXTENSION COLLEGE

Dept. 45, 18 Brooklands Avenue,  
Cambridge CB2 2HN

### Bourne Educational Software

BES

makes learning fun BBC

#### WOROHANG (Code P20)

Superb version of 'Hangman' word guessing game where you have to guess the letters of a word with a limited allowance of mistakes.

Watch your children improve their spelling and word knowledge by trying to stay alive! It keeps check on their scores too!

Utilises full colour high resolution graphics facility of BBC micro - watch his face as the final mistake is made!

Incorporates internal list of words divided into groups to suit age range of 5 to 13 years (no responsibility accepted for disconsolate children when Mum and Dad get addicted too!).

Features facility to guess full word at any time—but beware of the penalties for getting it wrong!

Includes easily loaded lists totalling 260 words—and your own lists easily saved too! Suitable for Model B.

#### ANIMAL/VEGETABLE/MINERAL (Code P21)

Think of an object and see if the computer can guess it correctly!

Program asks you to think of an object and then asks a series of questions as it tries to guess the answer. Ultimately the program either guesses the object correctly or asks for a question to distinguish the item from the computer's incorrect guess!

Stimulates fascinating (and educational) discussions as to the difference between an alligator and a crocodile, steel and iron, etc, and encourages use of reference books.

Programmed questions and objects entered can be saved at any point, so extending interest. Suitable for Model A and B.

TO: BES, Bedfield Lane, Headbourne Worthy,  
Nr Winchester, Hants SO23 7SO. Tel: 0962 882474

Qty	Code	Item	Price	Total
	P20	Wordhang	£7.95	
	P21	Animal/Vegetable/Mineral	£4.95	
	P20 + P21	Wordhang + Animal/Vegetable/Mineral	£10.95	

I enclose cheque/P.O. payable to BES value: £

Name.....

Address.....

BES POLICY is for ample supplies of software to be available before advertising and normally to despatch items within 24 hours of receipt.



## Setting up lessons for the whole class

It is likely that many teachers will want to use the micro for lessons with the whole class. If this is not to be in the style of poor pre-micro class lessons, software should satisfy some or all of the following criteria:

- stimulate class discussion;
- reach all pupils, irrespective of ability;
- engage the class in 'what if?' activity;
- lead to plenty of work away from the micro.

*Takehalf* (from SMILE) is one such program. It runs for about 12 minutes and operates in film-mode, ie the only interaction possible causes the program to pause or continue. A square is dissected in a host of ways so that black and white areas are always the same.

Whether it is shown as an initial stimulus or after the same activity has been done with paper and scissors is a matter of judgement. The author, Ronnie Goldstein, gives an interesting account of work based on the program in *Some lessons in mathematics using a microcomputer* shortly to be published by the Association of Teachers of Mathematics (ATM). One look at the program will impress the primary teacher with the wealth of potential for language work in maths.

A second strong program for class use is *Spiro* (Davidson Centre, Croydon) which is designed to follow up practical work with a real Spirograph. It has been used to investigate the connection between the number of teeth on the

cogs being used, the position of the pen within the cogs, and the nodes and revolutions of the resulting pattern. Pupils initially use the micro to check it is a good model of *Spirograph*, ie the patterns made by the micro match those made by the pupil using the plastic wheels. When this has been established, the pupil can use the program to test hypotheses which would be too tedious or impossible to test with the apparatus. The strength of this approach is that when pupils think they have a theory it can be tested speedily. This is the essence of satisfying conjectural work.

Pupils are also encouraged to design new spirographs which can create patterns which are impossible with the material version. *Spiro* has also been used to develop spatial awareness and a broader range of problem-solving skills in pupils who are poor in these areas although good at numerical work. The program is now being developed more fully as part of an MEP-funded project on developing thinking skills in the primary school, but early unsophisticated versions are available from the Davidson Centre, together with some notes prepared for pupils on a primary gifted children course.

*Eureka* also allows the immediate testing of hypotheses. Again from Shell Centre, this shows, in both graphical and pictorial form, the water level in a bath as taps are turned on and off and plugs are put in and pulled out. The teacher can opt to show only one representation so there can be discussion about what must have happened to produce a particular graph.

'One look at the program will impress primary teachers with the wealth of potential language work in maths'



### Addresses

SMILE, Middle Row School, Kensal Road, London W10  
Shell Centre for Mathematical Education, University of Nottingham School of Education, University Park, Nottingham NG7 2RD.  
Addison Wesley Publishing, 53 Bedford Square, London WC1B 3DZ

Ruth Townsend, Maths Advisory Service, Davidson Centre, Davidson Road, Croydon CR0 6DD. Tel: 01-656 0913.

Longmans Micro Software, 33-35 Tanner Row, York, YO1 1JP.  
NECOPS, Newman College, Genners Lane, Bartley Green, Birmingham B2.

ATM, King's Chambers, Queen Street, Derby DE1 3DA

*Bigtrak plus*, MEP Case Study 3. Contact nearest Regional Information Centre for details.

## Practical considerations

There is great potential in maths teaching, particularly in work involving drawing or movement, to use the micro as an electronic blackboard. If a micro is used in this way for class display the screen must be clearly visible to all pupils and it is unlikely that the monitors supplied with the Dol package will be large enough. One possible approach is to use the school's colour television, but the difference in quality between an RGB monitor and a domestic television is quite startling. It may be worth enquiring whether your LEA has arrangements for converting ordinary colour televisions to RGB for computer use.

Some schools may still have black and white video monitors which are useful for programs such as *Jane*, *Jugs* or *Subgame* but many others lose much of their impact without colour. It is also frustrating for a pupil to be asked to choose between, say, a red dot and a green dot when they both appear grey. Graphics which have been created using subtle blends of colour often virtually disappear on black and white screens and blue lines often appear very faint.

Programs which use lengths or angles can become confusing if a horizontal unit of length does not equal a vertical unit. This may be

caused by a badly aligned television (easily cured by a technician) or by faults in the software which have to be cured by incorporating scale factors into the drawing routines. The problem is compounded if the printer, which might be used to copy the diagram from the screen to paper, uses different proportions to those on the screen. Most printers can be set from within the program to give a variety of horizontal or vertical spacings, but teachers need to be prepared to answer pupils who measure lengths or angles and discover that the computer is wrong.

One neglected use of the computer is computer managed learning (CML). This could be valuable in a subject like mathematics where the order of acquiring skills is important. It entails diagnostic testing for those having difficulties, and good record keeping. There are programs designed to free the teacher from these clerical tasks so more time can be devoted to curing the problems. All such systems need some means of accessing data quickly, such as floppy discs or cartridge disc microdrives, and using cassette storage is not sensible.

## Build on the work scheme

Mathematics in the primary school must be carefully planned and co-ordinated if pupils are to have a satisfactory range of experiences, develop the necessary skills a positive attitude to mathematics as an interesting and enjoyable activity. Most schools have a scheme of work (often based on a major scheme such as Nuffield, Scottish or Fletcher) and a teacher with responsibility for mathematical development. It is crucial that careful planning precedes the use of micros in the teaching of mathematics to ensure consistency with the scheme used. A school using the Scottish mathematics scheme, which strongly

favours decomposition for subtraction, would have to consider carefully using a program which depended upon equal additions.

The integration of the micros into the teaching of maths means teachers cannot opt out of using the micro once it has been decided by the school that it is the only sensible way of developing particular skills. This places pressure on the single micro in a school, particularly when it will be used for other activities, and highlights the points made in Charles Bake's article about where the computer is sited (February *Acorn User*).





**SPECIAL OFFER!**  
Deduct £1 per cassette or disc when ordering 2 or more.

# TOP QUALITY MACHINE-CODE PROGRAMS

FOR THE



MICROCOMPUTER



## DISC-BASED SOFTWARE AVAILABLE NOW!

At last ... high quality software is available on disc for the B.R.C. microcomputer now!

Our programs are ready for despatch on quality 5.25" discs at only £9.90 for each program.

Alternatively, all six programs (together with a special menu-type selection program) can be supplied on one disc for just £49.90



**CENTIPEDE (32K)** £6.50 (on cassette) / £9.90 (on disc)  
Incredible arcade type game featuring mushrooms, flies, snails, spiders, and the centipedes of course. Excellent graphics and sound. 6 skill levels, hi-score, rankings, bonuses, and increasing difficulty as the spiders become more active and the mushrooms increase.

**SPACE FIGHTER (32K)** £6.50 (on cassette) / £9.90 (on disc)  
Arcade-style game based upon features from DEFENDER and SCRAMBLE. 5 types of menacing alien fire at you and may attempt to ram you. Separate attack phases, fuel dumps, asteroids, repeating laser cannon, smart bombs, hi-score, rankings, 6 skill levels, bonuses.

**FRUIT MACHINE (32K)** £6.50 (on cassette) / £9.90 (on disc)  
Probably the best fruit machine implementation on the market. This program has it all ... HOLD, NUJGE, GAMBLE, moving reels, realistic fruits and sound effects, multiple winning lines. This is THE fruit machine program to buy.

**GALAXIANS (32K)** £6.50 (on cassette) / £9.90 (on disc)  
Fast action version of the popular arcade game. 4 types of Galaxian (in 3 initial screen formations) swoop down individually or in groups of two or three. 6 skill levels, hi-score, rankings, bonus laser bases, increasing difficulty, superb graphics and sound.

**INVADERS (32K)** £6.50 (on cassette) / £9.90 (on disc)  
Superior version of the old classic arcade game including a few extras. 48 marching invaders drop bombs that erode your defences, and 2 types of spaceship fly over releasing large bombs that penetrate through your defences. Hi-score, increasing difficulty, superb sound effects and graphics.

**ALIEN DROPOUT (32K)** £6.50 (on cassette) / £9.90 (on disc)  
Based upon the arcade game of ZYGON, but our version improves upon the original arcade game itself. You have to shoot the aliens out of their "boxes" before the "boxes" fill up. Once full, the aliens fly down relentlessly, exploding as they hit the ground. Suitable for use with keyboard or joystick.



**SUPERIOR SOFTWARE** TELEPHONE: 0532-842714  
Dept. AU1, 69 Leeds Road, Bramhope, Leeds.

Please add 50p per order for P.&P. + 15% V.A.T.

We pay 25% royalties for high quality programs.  
Dealer enquiries welcome.

## GARLAND COMPUTING educational software

### PROGRAMS FOR BIOLOGY

Action of the Heart	£11.00
Seed germination	£16.00
Inheritance (4 programs)	£32.45
Glycolysis/TCA cycle	£17.05
DNA replication	£16.50
Genetic code	£16.50
Blood circulation 'maze'	£5.50
Ecological simulations	£17.05
Water relations of plant cells	£16.50

Prices inclusive of VAT and P&P, with detailed teaching notes. For full details of these and other subjects, write (stating main interest) to:


**GARLAND COMPUTING**  
35 Dean Hill, Plymouth PL9 9AF

## Increase the capability of your BBC/Acorn microcomputer

### Assembly Language Programming for the BBC Microcomputer

*Ian Birnbaum*

320 pages for only £8.95



The Acorn/BBC Microcomputer is arguably one of the most advanced computers in the low to medium price range. It certainly has features that other machines lack. For example, both the model A and model B machines are equipped with a powerful assembler program that can assemble machine language statements. Mixing assembly language statements and BASIC statements enables the programmer to increase greatly the capabilities of the computer by writing fast subroutines for games, graphic simulations, etc.

**Contents include:**  
Assignments  
Addition and subtraction  
Decision-making in assembly language  
Loop structures

Indexed addressing  
Indirect indexed addressing  
Multiplication and division  
The stack -  
Subroutines and interrupts  
Some useful utility programs

Exercises are included throughout and there are several valuable appendices.  
Save time and effort with the double cassette pack containing all the programs in the book.

To: Liz Digby Firth, Globe Book Services, Houndmills, BASINGSTOKE, Hants. RG21 2XS

Please send me  
Assembly Language Programming for the BBC Microcomputer  
\_\_\_\_\_ (£8.95)

\_\_\_\_\_ Double cassette pack (£16.00)

Cheque enclosed for £ \_\_\_\_\_ (plus 50p for p & p)

Name \_\_\_\_\_

Address \_\_\_\_\_



## Three useful educational programs

**MAZE** is a program which sets up mazes and displays them in plan view. Pupils are required to navigate a cursor around the maze from a given starting point to home by typing the instructions 'left', 'right', 'up' or 'down' at each intersection. Each run of the program sets up a different maze, although the starting point is always the same.

The game was played with the whole class volunteering instructions. Three pupils sat in front of the computer, with a screen to separate them from the class, and were shown how to use the return key. They had a card to remind them of the instruction keys and how to obtain a new maze.

After about ten minutes, two pupils left the computer, and two others replaced them on the keyboard, leaving one to instruct the newcomers. In this way, every pupil had a turn at the game, and they needed very little teacher help.

This program is useful as an introduction to the computer—every child achieved success, and their concepts of 'left', 'right', 'up' and 'down' were greatly improved.

Pupils showed great co-operation and teamwork in deciding on an instruction and learnt quickly from each other.

*Tower* and *Snap* are not names one would readily associate with the teaching of fractions. However, both are examples of the type of computer programs which offer the teacher avenues of practice normally only possible through lengthy, conventional, mechanical methods, at which pupils of low ability or short attention span often fail.

The programs arrived as part of a package delivered for use with our first school computer. They were used in the context of the school's normal schemes of work and supplemented conventional teaching methods. The computer was thus being used as a tool rather than as a teaching machine.

*Tower* was presented to show visually the size and notation of

**Maze:** Origin unknown but many maze programs are available.

**Tower:** Available from SMILE, Middle Row School, Kensal Road, London W10

**Snap:** Available from Newman College, Genners Lane, Bartley Green, Birmingham 32. (This will be in *Microprimer pack 3*.)

fractions by building a progressively larger tower of colour. This may be possible with other equipment but the program offers a clear, simple, efficient method of demonstrating the principle. It supplements the teacher when used individually or by small groups.

**P**upil ability ranged from remedial to gifted, but all achieved a high measure of success. The groups were balanced and discussion before each new fraction was entered led to a good deal of oral language work.

There was a satisfying degree of enjoyment present in using this

program, reinforcing the process being developed. Although the points and processes could have been achieved without a computer, in terms of productive use of curriculum time results clearly justified the use of such a resource.

*Tower* was used in conjunction with *Snap*, where equivalent fractions appear on the screen as shaded portions of cards. The idea is that when a pair of equivalent fractions appear the child touches the keyboard space-bar to signal 'snap'. A sensible amount of time is allowed as the fractions change to allow the pupil to think.

Listening and observing individuals at the keyboard, and later during more concentrated questioning, showed everyone had quickly achieved a high level of proficiency in recognising equivalent fractions.

Tony Pierce  
Barabara Tarranto

South Norwood Primary School,  
London

### Ten points to note

- Plan the use of each program for individual, group or class use. Some programs can be used in more than one way.
- Use the appropriate equipment for particular programs, eg colour monitor, printer or discs, and consider the effect on the pupil of their absence.
- Remember Cockcroft's advice about mental and oral work; using computers is a poor substitute for either.
- Exploit the computer's power to motivate, particularly through graphics, but do not trivialise maths or insult your pupils' intelligence.
- Work through programs yourself before using them with pupils, just as you would with any other new material.
- Integrate the use of the micro into normal maths activities while exploiting its capabilities.
- Do not restrict the use of micros in maths teaching to the least or most able. Make them available to all pupils.
- Do not use computers to replace practical work which is essential for concept formation.
- Consider whether programs should use standard units for lengths, particularly as it is possible to copy diagrams on the screen onto a printer which alters the screen proportions.
- Do not use expensive computers to perform activities which could be done equally well on small devices like *Little Professor*, *Dataman*, *Simon* or *Bigtrak*.


Next month: teaching programming to primary pupils



**NOW AVAILABLE** As featured in December's Acorn User

# Croydon LOGO Project LOGO CHALLENGE

Heather Govier and Malcolm Neave  
Project Adviser: Paul McGee

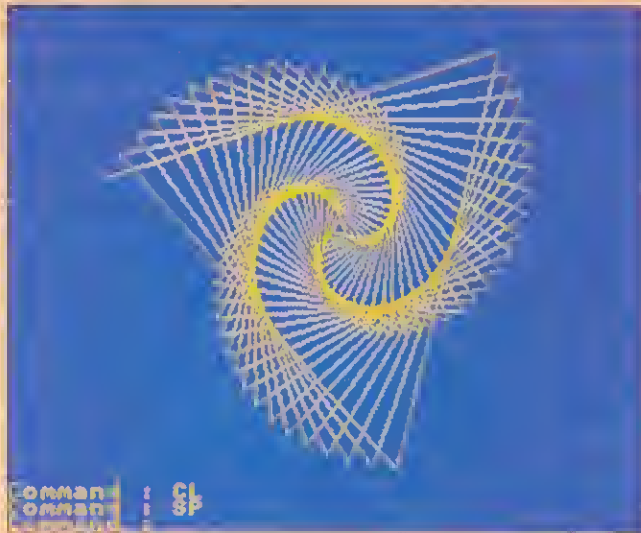

## About the Program

- Features the "turtle graphics" of the LOGO language
- Suitable for children aged 9 to 13 years
- All drawings can be stored for later re-use or incorporation into more complex patterns
- Teaches programming procedures, problem-solving, and turtle geometry
- Ideal for groups of 4 to 5 children
- Software available for BBC Acorn Model B, Sinclair ZX Spectrum, Research Machines 380Z, and Research Machines 480Z

## The Pupil Book

- Gradual introduction of commands
- Each step clearly illustrated
- Contains 10 Lessons and over 30 Challenges
- Challenges follow each Lesson to encourage further exploration and experimentation with the commands

## The Teacher's Guide

- Adopts a 'teach-yourself' approach to the program
- Introduces more complex procedures
- Gives suggestions for classroom organisation
- Includes suggested solutions to many of the Pupil Book Challenges

## The Software

- Side one contains the LOGO CHALLENGE program
- Side two contains the Answer File TEACH, which gives solutions to all the Pupil Book Challenges

## Availability

LOGO CHALLENGE is available in four different Teaching Packs, one for each machine. Each Teaching Pack contains one copy of the Pupil Book, one copy of the Teacher's Guide, and two copies of the appropriate cassette or disc, one of which is a back-up copy. The Pupil Book is also available separately in packs of five.

Teaching Pack for BBC Model B (cassette)	£29.95
Teaching Pack for ZX Spectrum (cassette)	£29.95
Teaching Pack for RML 480Z (cassette)	£29.95
Teaching Pack for RML 380Z (disc)	£37.95
Pupil Pack (5 copies of Pupil Book)	£14.95



Please return the coupon for further details or to place your order.



Addison-Wesley Publishers  
53, Bedford Square, London WC1B 3D

Please send me:

- |                          |  |                               |        |
|--------------------------|--|-------------------------------|--------|
| <input type="checkbox"/> | 201 18401 X                                      | Teaching Pack for BBC Model B | £29.95 |
| <input type="checkbox"/> | 201 18404 4                                      | Teaching Pack for ZX Spectrum | £29.95 |
| <input type="checkbox"/> | 201 18402 8                                      | Teaching Pack for RML 480Z    | £29.95 |
| <input type="checkbox"/> | 201 18403 6                                      | Teaching Pack for RML 380Z    | £37.95 |
| <input type="checkbox"/> | 201 18400 1                                      | Pupil Pack                    | £14.95 |
| <input type="checkbox"/> | Primary/Middle School Catalogue 1983             |                               |        |
| <input type="checkbox"/> | Secondary Computing Catalogue 1983               |                               |        |
| <input type="checkbox"/> | Complete Addison-Wesley Computing Catalogue 1983 |                               |        |

Name \_\_\_\_\_

Position \_\_\_\_\_

School \_\_\_\_\_

Address \_\_\_\_\_

Telephone No. \_\_\_\_\_



Addison-Wesley Publishers  
53 Bedford Square, London WC1B 3DZ

# Microprimer - neat package but short on software

by Heather Govier

Every micro supplied to a primary school through the Department of Industry scheme will arrive accompanied by a distance learning package called *Micro primer* produced by the Micro-electronics Education Programme.

The *Micro primer* consists of a number of distinct elements; text, audio cassettes and computer software. It is envisaged that the package will provide about 30 hours of study for teachers either working alone or preferably with colleagues. This individual study should be followed by two day courses to be run by LEAs. Indeed, it is a requirement of the Dol scheme that schools receiving the half price subsidy undertake to send two teachers for such training. So LEA courses cover similar ground, a 'tutor guide' is in preparation.

The *Micro Primer* consists of: a wallet containing an *Overview*, *Study Text*, *Reader*, audio case-studies and regional information leaflet; an *Easel* containing the *System Guide* and an *Activity Guide*; two software packs - *Micro-primer Pack 1* and *Factfile*.

Unlike the materials in the wallet, the easel and the software are machine specific.

The *Overview* is intended to guide the student through the pack, structuring the material into a coherent course, which should be read before anything else. It contains a statement of the aims and objectives of the package which are to: introduce teachers to




uses of micros in schools; give teachers confidence in using the micro throughout the curriculum; introduce some concepts of information technology; introduce social and education implications of technology.

There is little to quarrel with in this and the package meets the objectives drawn up well, although there is perhaps undue emphasis on social issues. Teachers will primarily be looking to the *Microprimer* for practical support in introducing the microcomputer into the school and classroom. Discussion of broader issues might have been better left to articles in journals and magazines. On the other hand, perhaps it is sound policy to punctuate a 30 hour course with more thought-provoking items.

A figure of 30 hours is probably rather low for most novice teachers. There is a large practical component to the course, true study time may well be twice the quoted figure.

The suggested routeway through *Microprimer* has 22 work units which vary from text based to practical, many units having an element of both. The route is certainly a winding road, but makes an interesting and varied progression through the material. Symbols are used to indicate the type of activities involved in each unit, a format which is useful in planning a course of study.

The *Study Text* was written in only eight weeks by David Chandler and forms an excellent

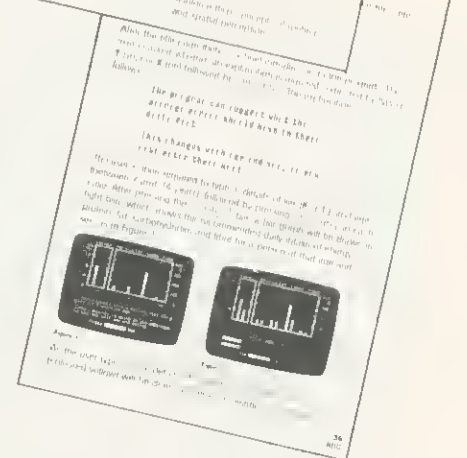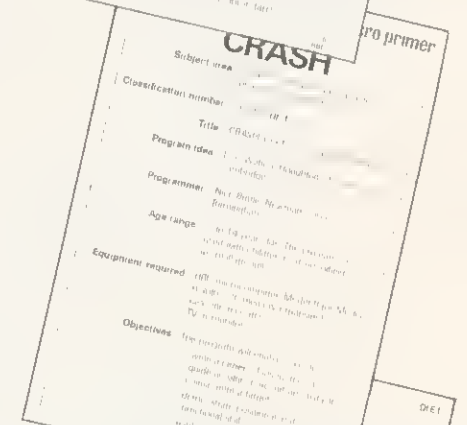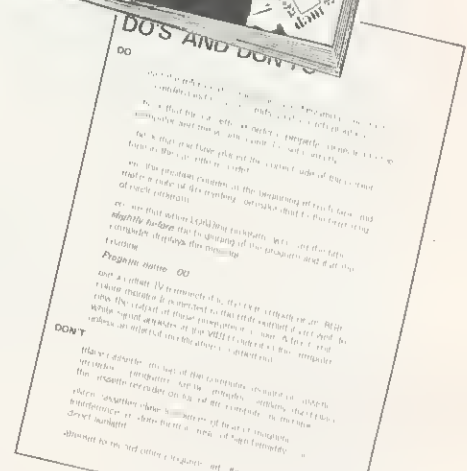

Cover of the software book, with some sample pages explaining programs



# WORLD'S LARGEST LIST OF



Market  
your own  
software through us  
Write with  
details

## HARDWARE

(All prices include VAT)


- MMB01 BBC MODEL B (ACORN) £ 399.00
- MMB02 BBC MODEL B + ECONET (ACORN) £ 446.00
- MMB03 BBC MODEL B + ECON/DISK INT (ACORN) £ 516.00
- MMB04 BBC MODEL B + DISK INTERFACE (ACORN) £ 469.00
- MMB05 BBC MODEL A (ACORN) £ 299.00
- MMB06 BBC MODEL A + ECONET (ACORN) £ 346.00
- MMB07 BBC DISK DRIVE 100K (ACORN) £ 265.00
- MMB08 BBC DISK DRIVE 800K (ACORN) £ 198.85
- MMB09 BBC DISK INTERFACE (ACORN) £ 109.25
- MMB10 BBC 6502 2nd PROCESSOR (ACORN) £ 195.50
- MMB11 BBC 280 2nd PROCESSOR (ACORN) £ 225.00
- MMB12 TELETEXT RECEIVER (ACORN)
- MMB14 JOYSTICKS (PAIR) (ACORN) £ 13.00
- MMB15 RGB COLOUR MONITOR (ACORN) £ 287.50
- MMB16 RGB CABLE (MICRO MAN) £ 632.50
- MMB17 12" GREEN MONITOR (PRINCE) £ 99.00
- MMB18 PLINTX FOR RGB MONITOR (MICROVITEC) £ 115.75
- MMB19 A TO B UPGRADE (FITTED) (ACORN) £ 8.96
- MMB20 A TO B UPGRADE (KIT) (MICROVITEC) £ 115.00
- MMB21 MEMORY UPGRADE (KIT) (ACORN) £ 59.80
- MMB22 PRINTER I/O (KIT) (ACORN) £ 24.72
- MMB23 ANALOGUE (KIT) (ACORN) £ 8.74
- MMB24 SERIAL I/O & RGB (KIT) (ACORN) £ 8.74
- MMB25 EXPANSION BUS (KIT) (ACORN) £ 11.79
- MMB26 EXPANSION BUS (KIT) (ACORN) £ 6.84
- MMB28 PARALLEL CABLE ASSEMBLED (MICRO MAN) £15.00
- MMB29 USER PORT CONNECTOR/CABLE (MICRO MAN) £2.30
- MMB30 ANALOGUE PLUG & CABLE (MICRO MAN) £2.58
- MMB31 5 PIN DIN (MICRO MAN) £0.69
- MMB32 6 PIN DIN (MICRO MAN) £0.69
- MMB33 7 PIN DIN (MICRO MAN) £0.69
- MMB34 BUS CONNECTOR (MICRO MAN) £0.69
- MMB35 EPSON M180 FT111 (EPSON) £4.03
- MMB36 EPSON M4100 (EPSON) £373.75
- MMB37 SEIKOSKA GP100 (EPSON) £488.75
- MMB38 SEIKOSKA GP100 (EPSON) £215.00

- MMB38 SMITK CORONA D/WHEEL (SMITH COR) £ 454.25
- MMB39 SPARK JET PRINTER (ACORN) £ 419.75
- MMB40 TEC 5 STARWRITER (ACORN) £1265.00
- MMB41 1/4" DISKS (10) (TEC) £ 22.43
- MMB42 COMPUTER CASSETTE TAPES (MICRO MAN) £ 1.00
- MMB43 COMPUTER DUST COVER (MICRO MAN) £ 5.74
- MMB44 DISK DUST COVER (MICRO MAN) £ 5.74
- MMB45 CASSETTE RECORDER (MICRO MAN) £ 29.00
- MMB46 FLOWCHART STENCIL (MICRO MAN) £ 4.02
- MMB47 CASSETTE LIBRARY CASE (MICRO MAN) £ 2.87
- MMB48 PAPER 9 1/2" x 11" (2000) (MICRO MAN) £ 2.87
- MMB49 GRAPHICS TABLET (A55) (MICRO MAN) £ 149.95
- MMB50 GRAPHICS TABLET (D15K) (MICRO MAN) £ 86.25
- MMB51 LICKIT PEN (MICRO MAN) £ 143.75
- MMB52 A/O CONVERTOR (MICRO MAN) £ 34.50
- MMB53 128 K RAM PACK (MICRO MAN) £ 36.23
- MMB54 COOLING FAN (MICRO MAN) £ 343.85
- MMB55 DISK DRIVE S 5 40 TRACK (MICRO MAN) £ 38.24
- MMB56 DISK DRIVE 2" D S 80 TRACK (MICRO MAN) £ 228.85
- MMB57 DISK DRIVE CABLE FOR ABOVE (MICRO MAN) £ 398.75
- MMB58 30 PROC5 FOR BBC (BOOK) (TEAC) £ 17.85
- MMB59 30 PROC5 FOR BBC (BOOK) (TEAC) £ 8.95
- MMB60 APL FOR BBC COMP (BOOK) (TEAC) £ 10.75
- MMB61 6502 APPLICATIONS (BOOK) (TEAC) £ 7.95
- MMB62 BBC MICRO REVEALED (BOOK) (TEAC) £ 6.45
- MMB63 LET BBC TEACH (BOOK) (TEAC) £ 5.95
- MMB64 30 HOUR BASIC (BOOK) (TORCH) £1144.25
- MMB65 280 PROC WITH DISK DRIVE

## SOFTWARE

(All prices include VAT)

- MMS001 OPTIONS TIMETABLE (C) (A.J. VISION) £18.40
- MMS002 RECORD CRANGER (A.J. VISION) £23.00
- MMS003 WORD PROCESSOR (A.J. VISION) £ 9.25
- MMS004 EDUCATIONAL - 1 (GOLEM) £11.38
- MMS005 COLDOSSAL ADVENTURE (LEVEL 9) £11.38
- MMS006 COLDOSSAL ADVENTURE (LEVEL 9) £11.50
- MMS007 QUANGON ADVENTURE (FISHER MARRIOTT) £ 6.90
- MMS008 STARSPELL (A & J SOFTWARE) £ 6.90
- MMS009 TABLE STAR (A & J SOFTWARE) £ 7.99
- MMS010 EARLY WARNING (A & J SOFTWARE) £ 7.99
- MMS011 ROADRUNNER (A & J SOFTWARE) £ 7.99
- MMS012 PLANES (A & J SOFTWARE) £6.90
- MMS013 PKARACKS TOMB (A & J SOFTWARE) £6.90
- MMS014 FROGGER (A & J SOFTWARE) £5.69
- MMS015 LUNAR LANDER (A & J SOFTWARE) £7.99
- MMS017 MAZE INVADERS (PROGRAM POWER) £7.99
- MMS018 FOOTER (PROGRAM POWER) £4.54
- MMS019 COMOKO (PROGRAM POWER) £6.84
- MMS020 MUNCHYMAN (PROGRAM POWER)

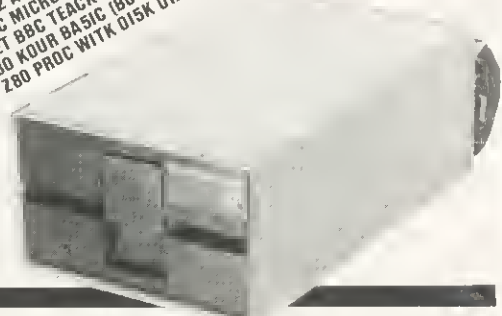

MICRO MANAGEMENT ORDER FORM				AT		COST	
CDDE	ITEM	QTY	£	p	£	p	
CREDIT CARD No				SUB TOTAL			
NAME		BARCLAY/ACCESS	POST & PACKING		TOTAL		
ADDRESS							

# BBC MICROS ACCESSORIES

Overseas  
dealers and distributors  
enquiries a speciality  
Exports a speciality  
(8&-Europe 50% extra,  
Rest of World  
75% extra)

- MMS039 ELORADO GOLD
- MMS040 LASER COMMAND
- MMS041 ASTRO NAVIGATOR
- MMS042 MICRO BUDGET
- MMS043 FILER
- MMS044 CONSTELLATION
- MMS045 BEEBTAPE
- MMS046 MICROERBY
- MMS047 SPACE PIRATES
- MMS048 CHESS
- MMS049 NUMIOTY & TEMPERATURE

- (PROGRAM POWER) £ 6.84
- (PROGRAM POWER) £ 7.99
- (PROGRAM POWER) £ 5.69
- (PROGRAM POWER) £ 7.99
- (PROGRAM POWER) £ 10.29
- (PROGRAM POWER) £ 6.84
- (CSL MICRODATA) £ 4.60
- (BUG-BYTE) £ 5.50
- (BUG-BYTE) £ 8.00
- (BUG-BYTE) £ 24.00
- (CHRIS HALL ENG) £ 35.50
- (CHRIS HALL ENG) £ 18.00
- (CHRIS HALL ENG) £ 35.50
- (CHRIS HALL ENG) £ 24.00
- (CHRIS HALL ENG) £ 18.00
- (CHRIS HALL ENG) £ 35.50
- (CHRIS HALL ENG) £ 18.00
- (CHRIS HALL ENG) £ 35.50

- MMS071 FORTN (LEVEL 9)
- MMS073 HTCN-HIKER (COMPUTER CONCEPTS)
- MMS074 SPACENAWNS (COMPUTER CONCEPTS)
- MMS075 ASTEROID BELT (COMPUTER CONCEPTS)
- MMS076 CHESS (GEM SOFTWARE)
- MMS078 L TRAP (GEM SOFTWARE)
- MMS079 TANE OFF (GEM SOFTWARE)
- MMS080 GRAPN CAPERS (GEM SOFTWARE)
- MMS081 MONTE CARLO (BUG-BYTE)
- MMS082 SPACE WARP (BUG-BYTE)
- MMS083 BDLF (BUG-BYTE)
- MMS084 DRAGON QUEST (ACORN(SOFT))
- MMS085 AIRLIFT (BBC)
- MMS086 POLARIS (BBC)
- MMS089 CUBE MASTER (BBC)
- MMS090 CRAPNS & CHARTS (BBC)
- MMS091 HOME FINANCE (BBC)
- MMS092 EARLY LEARNING (BBC)
- MMS093 MUSIC (BBC)
- MMS094 THE COMPUTER PROG VOL 1 (BBC)
- MMS095 THE COMPUTER PROG VOL 2 (BBC)
- MMS096 PAINTING (BBC)
- MMS097 DRAWING (BBC)
- MMS098 GAMES OF STRATEGY (BBC)
- MMS099 FUN GAMES (BBC)
- MMS100 THE COMPUTER BOOK (BBC)

- £17.25
- £6.67
- £8.97
- £8.97
- £11.50
- £ 6.88
- £ 6.88
- £ 5.73
- £ 6.88
- £ 6.88
- £ 9.00
- £ 11.50
- £ 5.50
- £ 5.50
- £ 9.95
- £ 7.50
- £ 10.00
- £ 10.00
- £ 10.00
- £ 10.00
- £ 10.00
- £ 10.00
- £ 10.00
- £ 10.00

A program for the 32K micro  
from Level 9 Computing

Colossal  
Adventure



- MMS021 MASTERMIND (PROGRAM POWER) £4.54
- MMS022 SPACE MAZE (PROGRAM POWER) £6.84
- MMS023 COWBOY SHOOTOUT (PROGRAM POWER) £8.84
- MMS024 ALIEN DESTROYER (PROGRAM POWER) £7.99
- MMS025 MARTIANS (PROGRAM POWER) £ 6.84
- MMS026 SWOOP (PROGRAM POWER) £ 7.99
- MMS027 SEEK (PROGRAM POWER) £ 5.69
- MMS028 GALACTIC COMMANDER (PROGRAM POWER) £ 4.54
- MMS029 CAT & MOUSE (PROGRAM POWER) £ 3.69
- MMS030 ZOMBIES (PROGRAM POWER) £ 7.99
- MMS031 STARTREN REVERSI I (PROGRAM POWER) £ 8.84
- MMS032 CHESS (PROGRAM POWER) £ 6.84
- MMS034 WORLD GEOGRAPHY (PROGRAM POWER) £ 7.99
- MMS035 JUNIOR MATHS (PROGRAM POWER) £ 6.84
- MMS036 DISASSEMBLER (PROGRAM POWER) £ 7.99
- MMS037 TIMETREN (PROGRAM POWER) £ 7.99
- MMS038 ADVENTURE (PROGRAM POWER) £ 7.99

- MMS053 ARCADIAN (ACORN(SOFT))
- MMS054 SNAPPER (ACORN(SOFT))
- MMS055 METEORS (ACORN(SOFT))
- MMS056 CREATIVE GRAPHICS (ACORN(SOFT))
- MMS057 TREE OF KNOWLEDGE (ACORN(SOFT))
- MMS058 BUSINESS GAMES (ACORN(SOFT))
- MMS059 PEEND-COMPUTER (ACORN(SOFT))
- MMS060 ALGEBRAIC MANIPULATION (ACORN(SOFT))
- MMS061 MONSTERS (ACORN(SOFT))
- MMS062 PLANETOID (ACORN(SOFT))
- MMS063 ARCADE ACTION (ACORN(SOFT))
- MMS064 DESK DIARY (ACORN(SOFT))
- MMS065 PHILLOSOPHERS QUEST (ACORN(SOFT))
- MMS066 LISP (ACORN(SOFT))
- MMS067 CRAPNS & CHARTS (ACORN(SOFT))
- MMS068 CREATIVE GRAPHICS (COMPUTER CONCEPTS)
- MMS069 LOGO II (BUG-BYTE)
- MMS070 FRUIT MACHINE (BUG-BYTE)

- £ 9.95
- £ 9.95
- £ 9.95
- £ 9.95
- £ 9.95
- £ 9.95
- £ 9.95
- £ 9.95
- £ 9.95
- £ 11.90
- £ 9.95
- £ 9.95
- £ 16.85
- £ 9.95
- £ 7.50
- £ 11.50
- £ 5.50
- MMS101 SALES LEDGER DISK (MICRO MAN) £57.44
- MMS102 PURCHASE LEDGER DISK (MICRO MAN) £57.44
- MMS103 FILE IT DISK (MICRO MAN) £22.94
- MMS104 MAILING LIST DISK (MICRO MAN) £11.44


Local  
Authorities and  
Government Departments  
Orders welcomed.  
Educational Seminars  
given.

EGONET?  
ASK US

Mail or telephone order  
Barclaycard or Access  
Credit Card accepted



Only defective or faulty goods  
may be returned.

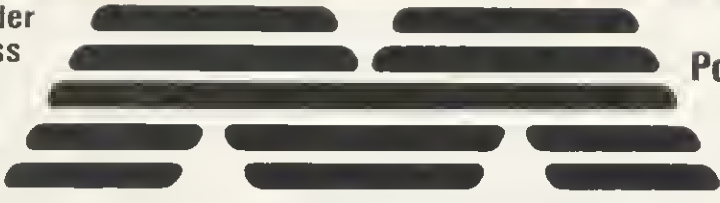


**MICRO MANAGEMENT**

Micro Management 32 Princes Street, Ipswich, Suffolk. Telephone: (0473) 59181

**SPECIAL OFFER**  
Post and Packing £1  
on all items

Applies to orders  
placed in  
March '83 only



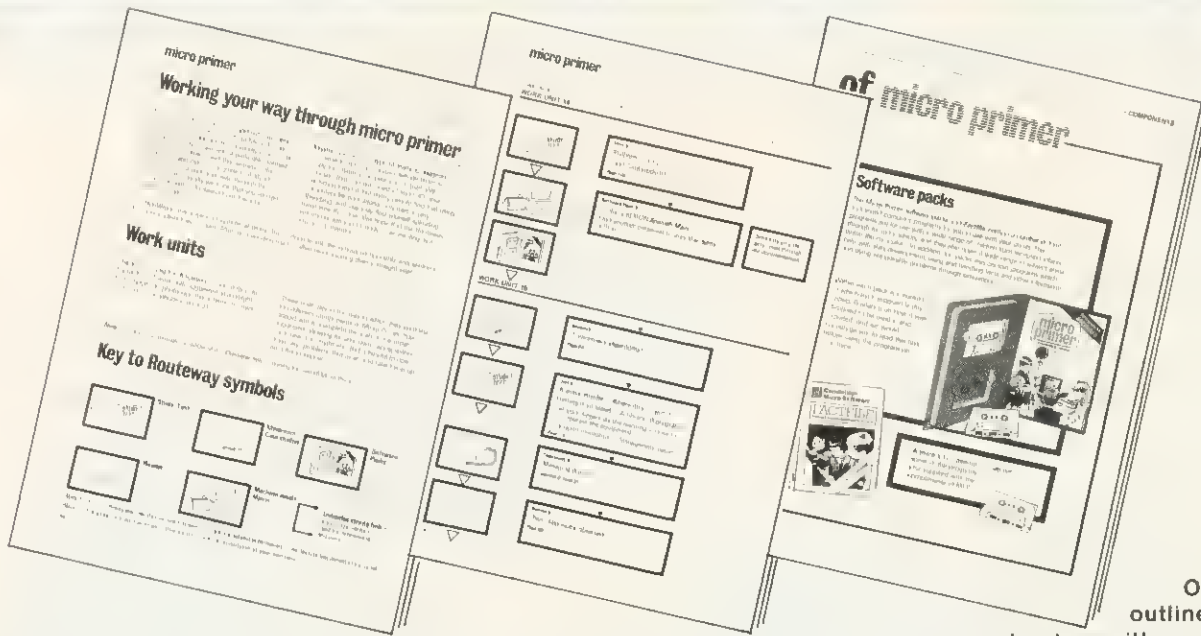

Overview – outlines course structure with case studies

► page 53

core to the package. The text aims to introduce the new technology in a straight-forward manner avoiding jargon and this it does admirably. A glossary explains most technical terms.

The book is divided into seven units, each concluded by review activities and references for further reading. It is well indexed and attractively presented. A number of articles referred to in the text have been grouped together by Derek Daines, and presented as the second component of the *Microprimer – The Reader*. They have been chosen primarily for their capacity to provoke thought and discussion.

The largest part of the book is Section 2 – 'Computers in the Classroom', bracketted by shorter sections on social implications and implications for primary education. Most of the articles have been written by practising teachers and the approach is pragmatic. The writers describe computers in use in a way that has worked well in their schools. This transmission of first hand experience is an excellent way for teachers to learn about the educational possibilities of micro-computers.

Whilst some of the articles in *The Reader* have been specifically commissioned, many have been drawn from previous publications. They are linked by editorial comments and although very varied in style and quality make interesting reading.

Neatly stored in the flap of the *Microprimer* wallet are two audio cassette tapes which contain four

25-minute case studies. These allow primary teachers who are using micros in their classrooms to explain in their own words what they are using them for and why.

The *Case Studies* consider structured reinforcement data handling, simulations, *Logo* and management of the micro, with the debate over what constitutes a 'valid' educational use of micro-computers running throughout. While much of the content of these tapes is duplicated in other parts of the package, the use of this alternative medium adds variety to study of the *Microprimer*. The fact that they can be listened to by a number of people at once means they could be used as a focus for staffroom discussion and debate. It is difficult to see how the textual materials could be studied by more than one person at a time however and so group use is likely to be limited.

Following the format adapted in the *Input* package produced by MEP for the secondary sector, the practical guides in the *Microprimer* are presented in the form of a handy *Easel*. This can be stood next to the computer for easy use and contains a *System Guide* and an *Activity Guide*, both machine specific.

The *System Guide* is a series of instructions for setting up the micro and loading, running and saving programs. Good use is made of pictures and all keyboard characters to be typed are written in blue. The use of most of the specialist keys is

described with examples and the meaning of screen prompts and error messages is explained. In practice, however, the *System Guide* lacks clarity and is ambiguous for novices to use without help. Occasional errors cause further confusion.

The *Activity Guide* on the reverse of the *Easel* is an instructional exercise designed to introduce teacher to programming. Although of less use to the average teacher, it is clearly presented and makes a good introduction to programming. In addition to writing programs, the guide covers the adaption of existing programs by changing data statements and print statements.

The remaining component of the *Microprimer* package is the software – perhaps the least satisfactory element. One cause for disappointment is the fact that only one of the four promised software packs is being supplied with the package, as much is not yet ready. Thus instead of receiving 30 software items with their machines, schools will get only 12. Of these, two are short programs designed to help in the setting up of the system, one is simply a datafile used by another program and the pair called *Mquiz* and *Quiz* are really two stages of the same activity, so there are really only eight discrete items of software. For schools in areas with good LEA software support this may not be too serious, but where such support is not forthcoming eight programs is shamefully few. A detailed review of these programs will be included in the next issue of *Acorn User*.




## Five offerings for the BBC micro from two houses. . .

### Billiards, H & H Software, Model B, £8.50

Chain this Model B game and you're looking down on a lime-green billiards table. Your ball is blue, your opponent's is green (you can't play the computer). Instead of a cue, there's a cross on the screen - blue when it's your turn, green when it's your opponent's. You use the arrow keys to move your cue. But try to avoid moving the cross over the balls, they get rubbed out. Also the table is not quite flat - just to make the game more interesting! Backspin or 'stop' is keyed in using 0 to 9; speed or 'weight' is any letter a to z. If you manage to hit another ball, there's a satisfying 'crash'. The computer keeps the score for pockets, in-offs and cannons - just like the real thing.

Alan Pipes

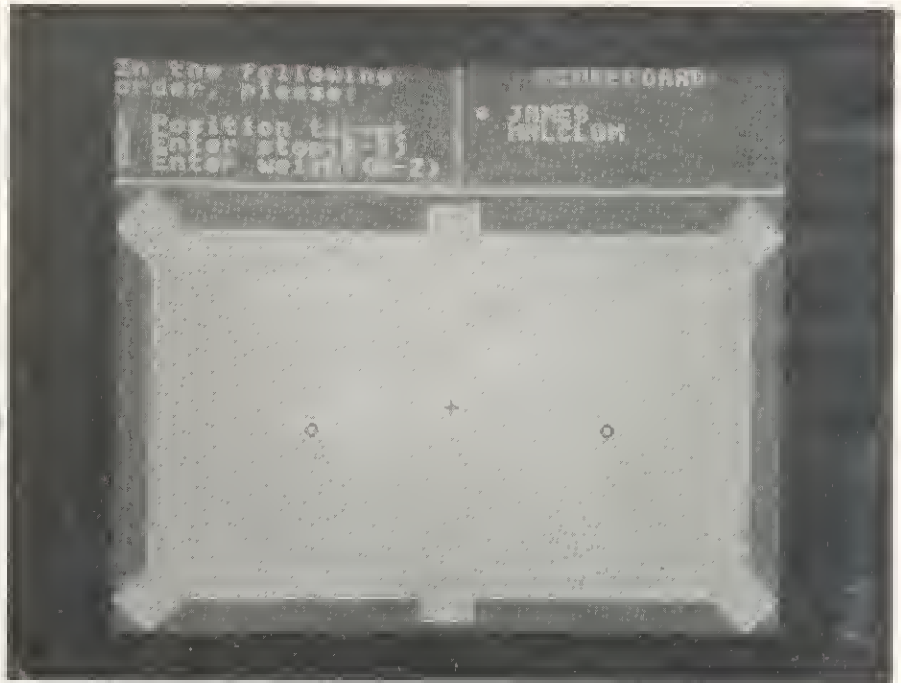

### Eldorado Gold, Program Power, Model B, £6.95

This is a whacky adventure-style game set in the Wild West. *Eldorado* though holds the interest with amusing comments (some mis-spelt!) and sound effects. It is mainly conversational, but with the odd little graphics window giving the setting. Commonly used commands: take, drop north, south, etc can be accessed via the user definable keys. When you're really stuck, a help button gives (sometimes) helpful hints. You can't save games, so you'll have to get adept at taking and dropping - a score is available though (by going back to the hotel!) at any time.

Alan Pipes

### Disassembler by Program Power, £5.95

The popularity of machine-code programming is reflected by the fact that BBC machines have a built-in assembler, so it is not surprising that a disassembler is now available. Requiring only 4k to run, the program is suitable for both A and B models, and can be located at any position in RAM. When run, the program prompts for start and finish addresses and an address for assembler code to be placed. This last optional feature stores disassembled code in the

given area of memory with labels for each instruction, and its format is such that it can be amended as required and then re-assembled. ASCII symbols can also be output, and the whole lot can be dumped to a printer.

This is a small, straightforward disassembler with none of the debugging features seen in more sophisticated (and larger) programs, such as breakpoints and memory moving. It does its job accurately and well, and will be a welcome and useful addition to the machine code programmer.

Philip Garritt

### Tess, H & H Software, Model B, £8.50

No this isn't an Adventure game based on the novels of Thomas Hardy - it's a graphic design package for producing repeating patterns. You start with a white square which you can add to or cut away using fine or coarse 'pencils' controlled by the arrow keys. It's like sculpting in two dimensions. But watch out - every time you add something to the right-hand side of the square, the computer is eating away at the left. It's making sure the shape will tessellate. So get out your book of Escher prints and have a go! Two points though - it will only do straight repeats, not

rotated or mirrored repeats, and an even coarser 'hammer and chisel' or area filler would be useful.

Alan Pipes

### Reversi by Program Power, £4.95

*Reversi* is the Victorian predecessor of the popular *Othello* game. Play is between black and white only, with black going first. When a counter is placed, any of the opposition's counters trapped in a straight line between it and others of the same colour are reversed. Play proceeds in this way, with counters on individual squares changing colour many times in the course of a game, until the board is full of black and white counters and a final tally is taken.

The program offers the player choice of colour, and will not allow any illegal moves. The large eight by eight board is displayed on the screen along with the current score. Despite the fact that the computer only takes two or three seconds to make a move, it thrashed me every time.

Surprisingly for a game of this type only one level of play is allowed, and no instructions are included. I don't think this program would encourage me to take up the game more seriously.

Philip Garritt





## ... Three more offerings, some more disappointing than others

### Painting, Drawing, BBC Soft, Model A, £10 each

These two programs, by the same author, have many similarities, therefore after a brief description of the facilities which each offers, I shall make general comments about both.

*Painting* is concerned with different ways of putting colour onto the screen in mode 5. By using the function keys you can get the following effects: clear the screen; select logical colour; change the palette; GCOL parameter – OR, XOR or normal; blocks of random dots; blocks of solid colour; blocks of cross-hatched colour; polygons of solid colour (many-sided being a circle); superimpose text; give up!

The program cassette also contains *Trees*. This is a ready-made painting program which draws modern art-type trees and produces 'music' at the same time. There is also a fully annotated version of the main program, presumably so that you can use the ideas for your own programs – a commendable idea.

*Drawing* produces various line-drawn effects in mode 5, again selected from the function keys; clear the screen; set actual colours of foreground and background; draw a line of specified thickness; draw a polygon; draw a sphere; draw a cone; draw a squared grid; draw a 'horizon', ie a series of parallel lines giving a feeling of depth to the picture; add text; give up!

This cassette also contains a demonstration remarkably similar to *Trees*, called *Sculpture*, and annotated versions of the programs.

If you were to buy these programs hoping to use them with primary school aged children, except perhaps the very oldest, I think you would be disappointed. In my view they would be difficult for anyone to use who is not already confident with micro-computers, as not enough has been done to make these programs user-friendly.

Cursor handling in both programs is cumbersome as it is invisible unless you are pressing a key. Also,

if you are trying to position the cursor near the edge of the screen and go slightly too far, it does not fold over to the other side of the screen, but puts you back in the centre of the screen, to start again!

Also there seems to be a bug in *Painting* in that as often as not when you press a key, the cursor does not appear at all, although it usually appears if you try a second time.

Setting up the effects is also awkward. Most effects require two or three parameters to be typed in every time you use that effect. It does not even allow you to default to the last known parameters for a given effect.

If these programs had been produced by a back-room programmer and sold at £5 for the two, I don't think you would have any cause for complaint, but when they come out at £10 each under the name BBC which we tend to associate with quality educational products, then I must feel disappointed. I don't know whether these represent good 'art', but they certainly do not represent good programming.

**Paul Beverley**

### Footer by Program Power, £6.95

*Footer* is a two-player football game for the model B. There is only one footballer per side, drawn as stickmen with proper running movements of their arms and legs as you shift them round the green and white screen. Each player has a group of five keys on his or her side of the keyboard – four for manoeuvring and one to kick.

The footballers can be made to run diagonally by holding down two keys at the same time, and things get a bit confusing when they come into close quarters, as they look identical.

The top of the screen displays the score and time (games last 300 seconds), and also a moving direction indicator whose position determines the angle of the ball when it is kicked.

It is quite easy to learn the knack of making accurate goal shots. When kicked, the ball curls

in the air, rebounds off the sides and slows to a halt in a realistic way. There is an option which allows dribbling the ball, in which case the player in possession can be tackled.

I found this game great fun to play, and it will be even better if Program Power produce a version for joysticks. The only crowd invasion I had to worry about was the gang who were kicking me off the machine so that they could play!

**Philip Garritt**

### Programs 1, Programs 2, by BBC Publications

On the whole *Programs 1* is a motley collection – some programs appear to have been added simply to fill up the tape.

The advertising suggests that the 'programs have been carefully designed to let you understand how they work.' This reviewer found understanding difficult! A few of them are interesting from the point of view of giving useful algorithms which could be used in other programs. In particular, the rotating cube of *Cube* and *Plotter* which drew three dimensional graphs.

The accompanying booklet suggests some ideas for midfying programs to explore other features of the micro, but it proved very difficult to implement these. The reason being that none of the programs is well documented nor listed in the accompanying booklet. It is very difficult to read and work on a screenful of incomplete listings!

Much of the same criticism can be levelled at *Programs 2* without the redeeming feature of a few useful programs. The only useful algorithm here is a spinning globe. *Lunar Lander*, while a good game in its own right, does not justify the cost of the tape and would be better included in a series of games programs.

It is difficult to see the value of these tapes. If they aim to instruct there is not enough support material – if they aim to entertain, there is not enough interaction.

**C.M.**

# BBC OWNERS

Why not consider the HOBBIT FLOPPY TAPE SYSTEM for your computer?

The HOBBIT gives you all the facilities you would expect from a floppy disc at a fraction of the price.

## Brief Specifications

- ☆ Read/Write speed of 750 BYTES per second
- ☆ Capacity: 101K BYTES per CASSETTE
- ☆ Average access time 22 seconds
- ☆ Up to 138 FILES per CASSETTE
- ☆ Completely automatic – no buttons to press
- ☆ Fully built, boxed and tested. Just plug in and go
- ☆ System can support TWO DRIVES

Available from stock **PRICE £135.00 plus VAT**

Also available for NASCOM computers **PRICE £120.00 plus VAT**




Access and Barclaycard accepted

*For more details contact:*

# Ikon Computer Products

KILN LAKE, LAUGHARNE, CARMARTHEN, DYFEO, SA33 4QE. Tel: Laugharne (099 421) 515

## BETTER THAN THE RUBIC CUBE! HUNGARIAN

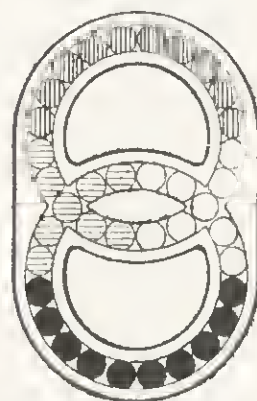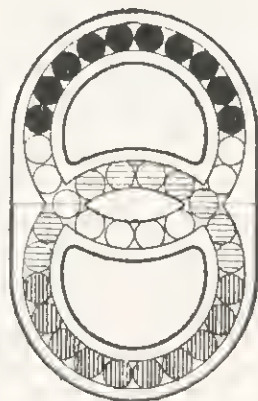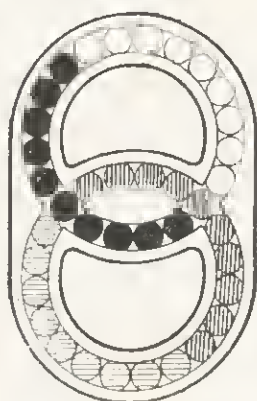

Now's your chance to get the latest craze that's sweeping the country – Hungarian Rings. Just 38 marbles in four colours in two interconnecting grooves, but with 10,000,000,000 variations. Move one marble in one groove and at least two other marbles move from their original position. Try to get all four colours together – that's almost easy. Try not to get two

colours touching – that will drive you crazy. Strongly made – it won't break – you will have to throw or give it away. Makes a super present for someone who has been driving you crazy.

Just send £3.99 which includes VAT and p+p and we will send you one straight-away.

Dealer Deals Ltd.  
20 Orange Street  
LONDON WC2H 7ED

**Dealer Deals Ltd**  
**20 Orange Street**  
**LONDON WC2H 7ED**

Please send me ..... (qty.)  
Hungarian rings I enclose  
PO/Cheque for £ .....  
Name: .....  
Address .....  
.....  
.....



# WATFORD ELECTRONICS

33/35 CARDIFF ROAD, WATFORD, HERTS. Telephone 40588

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME. GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. Carriage: unless stated otherwise, please add min. 50p to all cash orders.

**VAT** APPLICABLE TO UK CUSTOMERS ONLY. ALL PRICES EXCLUSIVE OF VAT. PLEASE ADD 15% VAT TO THE TOTAL COST INCLUDING POSTAGE. SHOP HOURS: 9.00am TO 5.00pm MONDAY TO SATURDAY. AMPLE FREE CAR PARKING. ACCESS ORDERS: Simply telephone through your order on Watford 50234/40589

## IT'S ALL IN THE GAME!

### SPACE GAMES

#### ALIEN DESTROYERS (32K) £7.95

Sensational, high speed 'INVADERS' program with an abundance of features. This program has many unique extras e.g.: 'Battle Analysis' showing the number of each alien type shot down.

#### ASTRO NAVIGATOR (32K) £6.95

Navigate your way through a variety of treacherous caverns, inhabited by killer rockmites. There are 5 skill levels and the top 5 scores are ranked at the end. Excellent colour graphics and sound.

#### ASTEROID BELT (16K/32K)

£7.80

A great new space game practically identical to the arcade original. An inspired piece of machine code programming producing one of the most exciting games around.

#### GALACTIC COMMANDER (32K)

£7.95

Nine phase aptitude test for aspiring space vehicle commanders. The program presents a real challenge and the use of machine code and hi-res graphics makes for beautifully smooth action. Great sound effects.

#### LASER COMMAND (32K) £7.50

Classic Defence of 6 Cities against attack from Alien planets plus random bombing raids from alien spacecraft. Super fast machine code arcade game with superb sound and graphics.

#### MARTIANS £6.95

Very popular. Defend your planet against the descending Martians with your Force-Field but beware of the Destroyers who can annihilate you.

#### SPACEMAZE (32K) £6.95

You have crash landed in the legendary labyrinth of Titan, inhabited by monsters known as 'FROOGS'. Find your way through to the 'TRANSMAT' before being cornered and eaten. The game has 8 levels of skill and 3D colour graphics.

#### TIMETREK (32K) £7.50

The ultimate 'real-time' Startrek, where indecision in the battle zone is your major enemy, 20 skill levels. Special features: PANIC BUTTON for once only space leap, New Klingon fleet after 30 Stardates and Torpedo sight control.

### OTHER GAMES

#### ADVENTURE (16K/32K) £7.50

All the excitement, intrigue and frustration of a mainframe adventure. Explore the tortuous forests, dark caverns and castle dungeons. Great skill and imagination are required to play this game.

#### ZOMBIES' ISLAND (32K) £7.95

Fight for survival on an island inhabited by hungry, dangerous cannibals. An excellent BASIC and MACHINE CODE program.

#### CHARACTERS (16K/32K) £5.80

Makes redefining of Invaders, Foreign Characters, Technical symbols, etc.'s character shapes simpler. Clumsy binary and hexadecimal notations are not req. anymore.

#### CHES (32K) £9.95

An excellent machine code program with superb Mode 1, colour graphics. 6 levels, play black or white, illegal moves rejected, 'en passant' castling, take-back of moves and display of player's cumulative move-time.

#### COWBOY SHOOTOUT (32K)

£6.50

Full feature, 2 Player, cowboy shooting game. Hide behind the cactus plants and moving chuck wagons until they are shot away. Shoot your opponent and avoid getting hit yourself.

#### ELDORADO GOLD (32K) £6.50

Legend has it that old Bill McCusky, who met a sudden death, had built up a vast treasure somewhere in the nearby territory. Can you end up rich where many have failed?

#### FOOTER (32K) £6.95

Another high resolution graphics game from the author of our Galactic Commander. A 2 player game in which each player has to use his football skills to try to out-run, out-dribble and finally score against his opponent. A serious contender to 'MATCH OF THE DAY'.

#### MUNCHYMAN (16K/32K) £6.95

Colourful and highly entertaining version of the popular arcade game. Munch your way to high score before the 'MUNCHERS' devour you.

#### REVERSI (16K/32K) £7.80

A sophisticated multi-option game. Play against the computer or another player or even watch the computer play itself. 5 skill levels allows any player to enjoy the game without continually winning (or losing).

#### ROULETTE (16K/32K) £5.95

All the fun of the Casino in your own home. This is a beautifully presented game for up to 6 players. The odds are calculated according to the official rules.

#### SNAKE (32K) £7.80

An arcade type game. Gives hours of fun. One of the best games available for this machine. Try it for yourself.

### APPLICATIONS

#### CONSTELLATION (32K) £6.50

The great Bear! The Southern Cross! The Horned Goat! See the night sky gloriously depicted in hi-res graphics. Constellation has been adapted and enhanced from our successful ATOM program.

#### DISASSEMBLER (16K/32K)

£6.95

Relocatable disassembler program. Lists object code and Assembler mnemonics from and to any specified addresses. The listing can be stopped and restarted. Page mode option and output to a printer are available. ASCII symbols may be output if required. The Assembler code may be stored and modified and the program re-assembled.

#### FILER £8.95

A powerful file handling program for BBC. FILER allows the user to build up, manipulate, store and retrieve data on the BBC. A very powerful package indeed.

#### WORDWISE (32K) (8K EPROM)

£39.00

Without doubt the most sophisticated piece of Software yet written for BBC Micro.

Wordwise contains all the usual word processing features. The more complex facilities such as search and replace or file handling commands are menu driven so that even a beginner can understand how to operate them.

Wordwise will work with whatever filing system is currently implemented. Supplied with full instruction and manual. (1.0 operating system only).

### EDUCATION

#### JUNIOR MATHS PACK (32K)

£6.95

Makes learning fun for 5-11 year olds. This package consists of 3 programs (menu driven) that increase in difficulty as your child becomes competent. A very good supplement to standard educational methods.

#### WHERE? £6.95

Do you know 'WHERE?' you are? This well written program, using high resolution graphics offers timed tests on the geography of Great Britain.

#### WORLD GEOGRAPHY (32K)

£6.95

Beautifully drawn Hi-Res colour map of the world illustrates and aids this graded series of tests on capital cities and populations of the world.

P. S.

All prices quoted in these lists are exclusive of VAT. Please add 15% to the total cost including VAT.

Carriage: Please add 60p p&tp insured to all orders.

All ex-stock items are despatched by return of post.

All our software is copyrighted.

There is no VAT on Books.

### BOOKS

30 Programs—BBC Micro £ 4.95

30 Hour BASIC (BBC Micro) £ 6.00

6502 Application Book £10.25

6502 Assembly Lang. Programming £12.50

6502 Assembly Lang. Subroutines £11.80

6502 Software Design £10.50

ACORN ATOM Magic Book £ 5.50

Advanced 6502 Interfacing £10.95

ALP for the BBC Micro £ 8.95

BASIC Programming on BBC Micro £ 6.90

BBC Micro Revealed £ 7.95

Discover FORTH—Osborne £11.25

FORTH Programming (Sams) £12.50

Getting Acquainted/Acorn ATOM £ 7.95

Intro to Micro Beginners Book (3 Ed) £ 9.90

Let your BBC teach you to program £ 6.45

Micros in the Classroom £ 4.90

Practical Prog. for BBC & ATOM £ 5.95

Programming the 6502 £11.20

Mastering VISICALC (Sybex) £11.95



**BBC      BBC**  
Computer Software

**SECTA  
INVADERS**

MACHINE CODE  
MODEL B. OR 32K MODEL A.

MODE 5  
HIGH-SCORE  
JOYSTICKS OR KEYBOARD  
64 INVADERS 'MOVING LEGS, ANTENNA ETC'  
CRUMBLING WALLS. FAST AND SLOW BOMBS  
UNIQUE EXPLOSION GRAPHICS  
ROTATING SAUCER ETC. ETC.

Only £5.95 inc.

**SECTA SOFTWARE**

187-195 BROAD STREET  
COVENTRY  
CV6 5BN





## OUT NOW— Software for your BBC Computer

Make the most of your BBC Microcomputer with this exciting new range of BBC software packs.

Featuring colour, sound, movement and superb graphics, they cover a wide range of applications – from painting, drawing and home finance to sophisticated video games. Two of the packs include programs demonstrated in *The Computer Programme* on BBC tv.

Each of these high-quality software packages contains a pre-recorded program cassette and a comprehensive handbook.

Home Finance • Early Learning  
Fun Games • Games of Strategy  
Painting • Drawing • Music

The Computer Programme Programs Vol. 1  
The Computer Programme Programs Vol. 2

Price £10.00 (inc. VAT) each

ON SALE  
WHERE YOU  
SEE THIS  
SIGN



THE *REAL*  
SOFTWARE FOR  
YOUR BBC  
COMPUTER

Published by British Broadcasting Corporation

## BBC PERSOFT PERIPHERALS AND SOFTWARE

### HOME ACCOUNTS

An accounts program specifically designed for the home user. It contains many features which make it the best accounts package currently available for the BBC Microcomputer.

Home Accounts is a comprehensive program allowing total control of all data. Full documentation is supplied making it easy to learn and simple to use.

Available for the Model 'B' Micro only.

PRICE: £12.50

### FRENZY

The object of this game is to destroy as many obstacles as possible. You are in control of a land speeder in an alien city. 'Running over' various objects such as dogs, fire hydrants and people. Your speeder has no brakes and you must dodge anti-matter blocks. Fast reactions and skill are required as your vehicle gets faster and faster.

For Model 'A' or 'B' Micro.

PRICE: £5.75

### POTENTIOMETER JOYSTICKS

Single or twin joystick units for direct connection to Model 'B'. Allows true analogue movement via one or two high quality dual axis potentiometer driven joysticks. The unit is encased in an elegant injection moulded case with two push buttons for use with Adval (O) statement.

It comes complete with full instructions and demonstration programs.

ONE STICK UNIT £27.90

TWO STICK UNIT £36.20

ALL PRICES ARE FULLY INCLUSIVE

SEND CHEQUE OR POSTAL ORDER PAYABLE TO:  
PERSOFT, FREEPOST, SHIPLEY,  
WEST YORKSHIRE BD17 5BR

## BREAKDOWN INSURANCE

When your guarantee expires, breakdown repairs may well involve you in costs of £10/25 per hour plus parts.

Insurance is available to provide cover for computers, monitors/tv's, cassette recorders, disc drives, printers etc.

Uses for which cover can be arranged include home, business and education.

Whether your equipment is worth £50 or £5,000 you will find the cost of insurance is very acceptable.

Full details will be sent on receipt of a note of your name and address together with the value, age and use of your equipment. (No stamp required).

BALL & CROSBY (INSURANCES-AU) LTD.,  
FREEPOST  
25A PARK SQUARE  
LEEDS LS1 1YY

SPECIALISTS IN COMPUTER INSURANCE

MEMBERS OF THE BRITISH INSURANCE  
BROKERS ASSOCIATION

## Software critics

The **Bottisham Acorn User Group** first met last March and now holds regular sessions at the address below – although a new venue is being sought as Mr Harris's house becomes more overrun.

Each monthly meeting is devoted to a special topic. In December it was graphics, with members providing constructive criticism of each other's programs. January will be devoted to educational software.

The group is considering setting up a software library, and members

are encouraged to bring along as much hardware as possible. For further details contact John Harris at 1 Rowan Close, Bottisham, Cambridge CB5 9BN. Tel: (0223) 811487.

## Eastwood arrives

A letter has arrived at our office from **Eastwood Town Micro-computing Club** announcing their presence. They have two meetings a week and can be contacted through: Ted Ryan on Langley Mill 65011, Roger Hellings on Langley Mill 69281 or Robert Clifford on Ripley 812459. Their next fund raising event is in March.

## Thanks from Sweden

There is now a **Swedish** Acorn user group (address below) and as you will gather from the name, it deals with both the Atom and the Beeb. They thank us for a 'very nice magazine' – we thank them for letting us know they are around.

**Please use the latest list when trying to contact groups, as these are updated each issue. Most groups also appreciate a self addressed envelope for reply.**

## CLUB CONTACTS

● Rupert Steele  
**Amateur Computer Club**  
St John's College  
Oxford OX1 3JP

● Mr B. Carroll  
The Cottage, 42 Manor Road  
Aldershot GU11 3DG

● **West Midlands Computer Group**  
12 Apsley Road  
Oldbury  
West Midlands B68 0QZ

● Mr J. Price  
Bedford House  
27-28 St George's Road  
Brighton  
Sussex

● Mr P. Beverley  
**Norwich Area Acorn User Group**  
Room 12a, Norwich City College  
Ipswich Road  
Norwich NR2 2LJ

● Keith Mitchell  
**Edinburgh ZX Computer Club**  
19 Meadowplace Road  
Edinburgh  
Tel: 031-334 8483

● Steve White  
**Atom/BBC User Group**  
c/o Superior Systems Ltd  
178 West Street  
Sheffield  
Tel: (0742) 755005

● Robin Bradbeer  
**Association of London  
Computer Clubs**  
Polytechnic of North London  
Holloway  
London N7 8DB

● Mr C. Rutter  
**Medway Atom Users Club**  
St John Fisher School  
Ordnance Street  
Chatham  
Kent

● **Beebug**  
374 Wandsworth Road  
London SW8 4TE

● Mr J. Ashurst  
**Acorn Computer Users Group**  
Abraham Moss Centre  
Crescent Road  
Manchester 8

● Mr D.L. Evans  
23 Hitchin Road  
Henlow Camp  
Bedfordshire

● N.P. (Bazyle) Butcher  
**Harrow Computer Group**  
16 St Peter's Close  
Bushey Heath  
Watford WD2 3LG

● Mr P. Frost  
**Atom Users Group**  
18 Frankwell Drive  
Potters Green  
Coventry CV2 2FB

● Mr M. Chrisliansen  
**BBC Users Group**  
Marienlystveien – Stavne  
N-7000 Trondheim  
Norway

● **Liverpool BBC Microgroup**  
c/o Fred Shaw  
14 Albany Avenue  
Eccleston Park  
Prescot  
Merseyside L34 2OW

● John Harris  
**Bottisham Acorn User Group**  
1 Rowan Close  
Bottisham  
Cambridge CB5 9BN  
Tel: (0223) 811487

● Peter Smith  
**Fareham and Portchester  
Amateur Computer Club**  
23 Sandy Close  
Petersfield  
Hants

● **Acorn Users Group of Sweden**  
c/o Janne Soderberg  
Frihetsvagen 32  
S-175 33 Jarfalla  
Sweden

● Paul Barbour  
**Laserbug**  
4 Station Bridge  
Woodgrange Road  
London E7 ONE

● Brian Pain  
**Colour Micro Users Group**  
40a High Street  
Stony Stratford  
Milton Keynes  
Tel: (0908) 564271

● **Muse** (for teachers)  
Freeport  
Bromsgrove  
Worcs B62 7BR

● Mr D. Coulter  
**Preston BBC User Group**  
8 Briar Grove  
Ingo!  
Preston PR2 3UR

● Mr J. Craig  
**National BBC User Group**  
40 Mount Pleasant Avenue  
Wells  
Somerset BA5 2JQ


● Mr R. Luff  
**Kingbee**  
54 Arlington Close  
Kingswinford  
West Midlands

● **Computer Club**  
Caterham Leisure Centre  
Godstone Road  
Caterham  
Surrey CR3 6RE  
Tel: Caterham 48304/43316

● Mr M.G. Forster  
**Potbug BBC Users Group**  
8 St George's Avenue  
High Lane  
Tunstall  
Stoke-on-Trent  
Tel: 818499

● Ted Ryan  
**Eastwood Town Microcomputer  
Club**  
15 Queens Square  
Eastwood  
Nottingham NG16 3BJ





# EXCELLENT ON STRINGS

Bruce Smith gives his verdict on the Ross utility EPROM as a toolkit

The Ross Software utility EPROM plugs into the utility socket, IC24, and occupies 4k of memory from A000 hex onwards. Once installed, it adds a further 33 commands to the Atom's own Basic vocabulary. These appear as cassette OS commands and must therefore be prefixed with an asterisk. The toolkit provides a cassette interface, flashing cursor and a variety of aids to make life easier.

The Atom must be made aware of the utility EPROM's presence by executing LINK 44992 in direct mode, which should result in the normally inert Atom cursor beginning to blink on and off. The floating point ROM does not need to be present for the toolkit to work, and the entry address must be re-LINKed after BREAK.

Once initialised the Atom's 300 baud COS is replaced with a much faster, though less reliable, 1200 baud version. \*TAPE controls the baud rate, being switched between 300, 600 and 1200 baud with either \*TAPE1, \*TAPE2 or \*TAPE3 respectively. \*BSAVE allows Basic programs to be saved so they may be \*RUN in a similar manner to machine code programs.

\*APPEND and \*VERIFY are particularly useful. The former chain loads Basic programs onto the end of one another, whilst the latter command checks saved programs.

During all cassette input and output, visual indication of loading and saving is provided by a display of each byte transferred at the top of the screen.

The three most frequently used utility commands will undoubtedly be \*AUTO, \*RENUMBER and \*DELETE. The first \*AUTO provides automatic line numbering, the start and step values of which must be specified, such as \*AUTO 10,10. A short bleep is emitted if the line number generated already exists. Similarly programs may be \*RENUMBERED with GOTOs, GOSUBs and \*RESTOREs altered to match their new destinations.

Calculated jumps such as GOTO (20 + N) are ignored and must be located and altered separately. Blocks of lines may be removed using \*DELETE.

\*VAR prints the decimal values of Basic's integer variables, which may all be set to zero with \*ZERO (useful for debugging). \*PACK removes all those byte-eating spaces from programs, whilst preserving the so-called significant spaces. It does not remove REM statements, but these can be found and listed using \*FIND.

The inclusion of \*READ and \*DATA gives the Atom a more standard Microsoft Basic feel and makes manipulation of numerical and string data a breeze compared with the somewhat cumbersome method outlined in *Atom Theory and Practice*. The data pointer is set to a specified line number with the use of \*RESTORE.

\*KEY \$ N and \*KEY N provide true keyboard scanning, passing any detected values to a specified string or variable, 'N', respectively. \*WAIT provides programmable delays in increments of 1/60s.

Notes may be 'played' with \*TONE D,P where 'D' is the duration of the note and 'P' it's pitch. \*KBEP outputs PRINT \$7 until a key is depressed.

\*STOP has the same effect as LINK # FFE3 but prints the line number where the halt has occurred. \*POP allows subroutines to be 'jumped' out of without a RETURN - not good style.

Some good graphics facilities are included, the best of which are several excellent 'soft' VDU commands enabling strings of characters to be printed in any graphics mode. As an example, this program will print 'ATOM' in each mode at co-ordinates X,Y:

```

5 X=4; Y=28
10 FOR N=0 TO 4
15 CLEAR N
20 *STRG X,Y "ATOM"
25 *WAIT 120
30 NEXT; END

```

The current contents of the input

buffer may be printed using \*BSTRG whilst \*CHAR will print a single ASCII character. \*BLOCK fills an area of screen memory at co-ordinates X,Y and of size A,B. N defines whether the block is set, inverted or cleared, and is used thus: \*BLOCK N X,Y,A,B

\*POINT X,Y P tests the screen at position X,Y returning a '1' or a '0' in any variable 'P' if the point is set or clear.

The \*SHAPE and \*TABLE commands are difficult to understand, but once mastered allow any number of shapes to be defined and stored in a memory table. Plotting any one of the shapes is simple: \*SHAPE 9, 20, 30 would draw shape 9 at screen co-ordinates 20,30.

The utility ROM arrived embedded in foil-covered polystyrene foam, protecting it from static electricity. The accompanying 12 page manual provides adequate information on the new commands, although the general layout is somewhat haphazard. Included is a useful section on the 12 new error codes used by the toolkit.

Only nine bytes of precious block zero RAM are accessed by the utility EPROM, namely AA hex to AF hex in zero page and 023D to 023F hex. However, \*RENUMBER uses screen memory from 8200 hex as its scratchpad - not much good with a minimal Atom.

I have only two criticisms. First, utility commands such as \*RENUMBER and \*AUTO have no default values and if one or both parameters are omitted an error occurs. Second, the use of delimiting commas between variables after commands is not standard. Thus I found myself continually reaching for the manual to distinguish between, for example, \*POINT X, Y P and \*SHAPE N X, Y - minor points but annoying.

At £15.95, the Ross Software utility EPROM is good value and worthy of consideration. Details from: Ross Software, 44 Premier Avenue, Grays, Essex RM16 2SD.

# ELECTRONEQUIP

(Authorised BBC Dealer and Service Centre)

**SPECIAL OPENING OFFER DUE TO MOVE TO NEW PREMISES ALL ORDERS RECEIVED DURING NEXT MONTH QUOTING REF. ACOU/C WILL BE ENTERED INTO A WEEKLY DRAW AND 2 CUSTOMERS IN EVERY 100 WILL RECEIVE THEIR GOODS FREE OF CHARGE**

## THIS MONTHS SPECIAL OFFERS

BBC36	High quality 14" RGB Colour Monitor/ TV. Colour monitor suitable for 80 columns with ability to receive TV	244.95
BBC45	New improved cassette recorder for BBC. Has monitor facility, counter, remote	35.55
BBC4B	Dual 800K disc drives for BBC micro with free Z80 second processor card	897.00
	Large stocks of Software for many machines as well as BBC. Acornsoft, Bug-Byte, CP/M, Program/Micro Power, Computer Concepts etc.	
	Business systems enquiries welcome. Systems and Software available from 500 to 100,000	
	Torch Colour Machine 800K floppies ex. VAT	2795.00
	Torch Colour Machine Hard Disc ex. VAT	4995.00
BBC54	Daisy Wheel printer for BBC 12cps	558.90

<b>BBC</b>		
BBC1	BBC Micro Model A	299.00
BBC2	BBC Micro Model B	399.00
BBC3	BBC Model A Micro with 32K	333.50
BBC4	BBC Model A Micro 32K & VIA	339.50
BBC21	Upgrade Model A to B	99.82
BBC27	Disc Upgrade for BBC B	109.25
BBC30	14" Colour Monitor for BBC	286.25
BBC33	BMC12A 12" Black/Green Monitor	90.85
BBC34	12" Black/Green Monitor for BBC	113.85
BBC35	12" Black/Amber Monitor for BBC	129.95
BBC36	14" Monitor/TV, 80 columns	244.95
BBC40	Cassette Recorder for BBC	29.90
BBC41	Single 5.25" Disc Drive 100K	265.00
BBC42	Dual 5.25" Disc Drive for BBC	447.00
BBC4B	Dual 800K low profile disc drives	897.00
BBC49	5.25" Discs for BBC 40/80 tracks	2.20
BBC50	Epson MX80T type 3 for BBC	373.75
BBC54	Daisy Wheel printer for BBC	558.90
BBC70	Plinth/Stowage for BBC	29.90
BBCB0	Cassette lead for BBC	4.60
BBC95	Printer lead for BBC	17.25

Large stocks. Prices inclusive of VAT

All prices inclusive of postage except micros 3.00

*All Upgrades etc. are fitted free of charge and the computer fully re-tested. Access and Barclaycard welcome*

## ELECTRONEQUIP

36-38 West Street, Fareham, Hants PO16 0JW Tel: 0329 230670



### FLOPPY DISC DRIVES

SINGLE AND DUAL DISC DRIVES  
40 OR 80 TRACK FOR BBC MICRO

Includes utility disc and Dos Manual Phone for prices:—

### BBC MICRO


BBC COMPUTER MODEL 'A'	£262.00 + VAT
BBC COMPUTER MODEL 'B'	£349.00 + VAT
BBC COMPUTER WITH DISC	£410.00 + VAT

### MONITORS

High resolution 18 MHZ 12" Green Phosphor Monitor

**£99.00 + VAT**

Includes Cable




### OTHER ITEMS AVAILABLE FOR THE BBC MICRO

Books, Cables, Joy Sticks, Cassette Decks, Oust Covers, Teletext Adaptor, Speech Upgrade.

SEND FOR PRICE LIST

### SEIKOSHA GP-100A

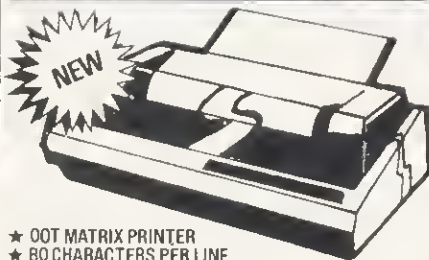

- ★ DOT MATRIX PRINTER
- ★ 80 CHARACTERS PER LINE
- ★ 30 CHARS/SEC
- ★ FREE HI-RESOLUTION 'DUMP OUT' LISTING

£179 + VAT, Carr £6

BBC Printer Cable £16 + VAT

### BBC MICRO

WORD PROCESSOR ROM £46.00

CHESS	£11.50
ASTEROIDS	£ 8.95
GLAXIAN	£ 8.95
BILLIAROS	£ 8.50
FROGGER	£10.00
GOLF	£ 8.00



### BBC MICRO

### MICRO UPGRADES

**RAM KITS:** Upgrades the Model 'A' to 32K RAM Supplied with full fitting instructions. . . . . £29.90 + VAT  
**ANALOGUE KITS:** Suitable for adding joysticks, controllers etc. . . . . £15.00 + VAT  
**PRINTER INTERFACE & I/O PORT:** Enables a Centronic Interface printer to be attached. . . . . £16.00 + VAT

### MODEL 'A' TO MODEL 'B' UPGRADE £89.00 + VAT (fitted)

DISC EXPANSION . . . . . £80.00 + VAT  
DISC DRIVES . . . . . from £179.00 + VAT  
COLOUR MONITORS . . . . . from £229.00 + VAT


Send for details on other items, cables, cassettes, plugs, software etc.

**WHY NOT SEND YOUR MACHINE TO US FOR UPGRADING?**

### PRINTERS

EPSON MX80 F/T3 — The printer recommended for the BBC Microcomputer.

- ★ Dot Matrix Printer
- ★ 80 Cps
- ★ Hi-Resolution Graphics
- ★ Bi-directional Printing



**SPECIAL PRICE**  
£329 plus VAT  
Printer Cable  
£16 + VAT



Telephone STD (0438) 65385  
2 Daltry Close, Old Town, Stevenage.





# WORDSCAN

**FOR ALL BBC MICRO OWNERS—  
A WORD PROCESSOR ON CASSETTE.**  
*Even for those owners who do NOT  
own a printer*

So far, you have used your machine to play games. Now you can get some REAL benefit, using it for WORD PROCESSING.

An extremely fast and easy to use program, professionally written to cater for any amount of TEXT from a simple letter on the Model A to an extensive essay on the Model B.

Designed to interface with the EPSON MX80 FT3, but will operate on any 'machine compatible' printer. A **Bureau Service** is available for PRINTING if you need it. 'Edit' your text on your TV monitor. 'Save' it on a fresh cassette when you have checked it out. Send it to me for a fast, confidential PRINT service.

Your local BBC Micro Dealer has all the details. He can show you the program and documentation in operation.

Otherwise write to "Dial Software", 72 Downend Road, Downend, Bristol BS16 5UE, for full details of the Package and the Bureau Service.

*The Price of the Package is £18 + VAT*

*The Print Service is charged at min £2 per 1000 words*

# OAKLEAF COMPUTERS LTD

Education Hobbyist &  
Small Business Computers



IT'S NOT JUST ACORNS THAT LOOK BETTER ON AN **OAKTREE WORKSTATION**

THE UNIT SUITS BBC VIC 20 TRS 80 ZX SPECTRUM ETC. With a built-in accessory drawer.

this smart unit turns your setup into a professional and business like system. The drawer holds up to 50 diskettes or your tape collection and leads etc.

**TWIN USER JOYSTICK INTERFACE ATOM/BBC £13.95**

Protect the keyboard of your computer by interfacing "Atari" joysticks to it. The joysticks plug into the interface which in turn simply plugs into either the Atom 64way bus or the BBC 20way user port. (Atom bus units available at £3.99 if ordered with the interface) Now two people can successfully play games or one person can have more control over the computer Full software supplied

**ATOM LATEST**

It Atom have made it, we stock it. Disk drives off the shelf. Hardware, books, printers. Phone now Prices always competitive

**BBC MODEL B NOW IN STOCK**

Full or partial upgrades, memories, printers of disk interfaces etc. All available Prices dropping. Phone for quotation All current BBC peripherals stocked

ALL PRICES INCL. VAT AND P&P

Please send your remittance to:

**121 DUDLEY ROAD GRANTHAM,  
LINCS. NG31 9AD**




**ACORN**

SPECIALISTS TELEPHONE: (0476) 76994



001 INVADERS - High quality full feature arcade style Space Invader game, written in machine code, using Model colour graphics, sound envelopes, Hi score, mystery ship, bonus base, advancing/walking aliens.

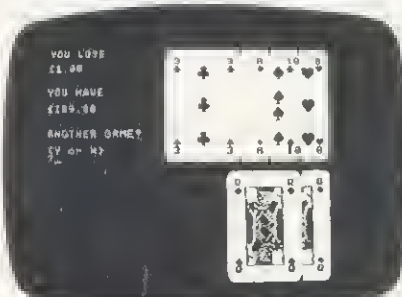

004 BLACKJACK - Just like the arcade game  
DISASSEMBLER - Restores assembler code  
TEXTPRO - Text processor offering text scrolling, editing, justification, tape routines, printer commands, etc.

## SOFTWARE INVASION

PRESENTS

4 BRILLIANT NEW SOFTWARE TAPES for the BBC Micro (32K) - If you're looking for COMPUTER SHOWPIECES - Look no further!

- ORDERS SENT BY RETURN POST
- REAL TIME GAMES HAVE JOYSTICK OPTION
- EACH TAPE COSTS JUST £6-95 inclusive


Software Invasion, 50 Elborough St., Southfields, LONDON SW18 5DN.

Please send the following programs at £6-95 each inc.

( ) 001 Invaders.....£ \_\_\_\_\_  
( ) 002 Galaxian..... \_\_\_\_\_  
( ) 003 Apollo..... \_\_\_\_\_  
( ) 004 Blackjack, Textpro, Disassembler..... \_\_\_\_\_

I enclose cheque/P.O. for £ \_\_\_\_\_

NAME..... \_\_\_\_\_  
ADDRESS..... \_\_\_\_\_  
..... \_\_\_\_\_  
..... \_\_\_\_\_  
.....Post code..... \_\_\_\_\_

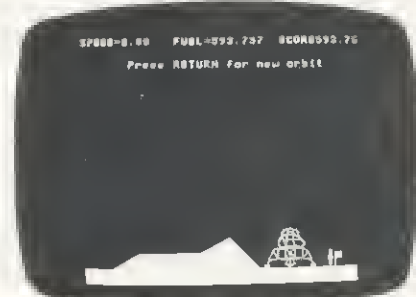

003 APOLLO - Lunar Lander with a difference! 4 stage game comprising Orbit, Long range, Mid range, detailed landing. Limited fuel, Hall of Fame, sound, moon walk etc.



002 GALAXIAN - Another top quality full feature arcade style game using machine code, vivid Model colour, moving stars, Hi score, bonus ship, flogships, up to 5 swooping aliens. Exciting but tasteful sound effects.

Paul Beverley give the circuitry for a high resolution digital to analogue converter using a single output from the Atom

# ANALOGUE CONVERTER

If you need a high resolution digital to analogue converter and are not too worried about how quickly it responds then you may be loathe to spend £30 for a commercial 12-bit digital to analogue converter chip.

This article describes a versatile method of using an Atom to produce an analogue voltage. It has the added advantage over the conventional digital to analogue converter of using only a single output line from the computer. There is also a trade-off between the level of resolution and the speed of response which can be adjusted to suit any particular application. In addition, this method depends on generating a square wave with selectable time period and mark-space ratio - a useful facility for certain applications.

The idea is to use the two timers within the 6522 versatile interface adaptor (VIA), working under interrupt, to produce a square wave pulse of variable mark-space ratio. Figure 1 shows that as the mark-space ratio is increased, the average level of the signal increases. Therefore, if the square wave is put through an averaging circuit, we get a voltage output which is proportional to the ratio of 'mark' time to periodic time.

Because the timing of the pulses is done by the versatile interface adaptor, which runs at 1 MHz, we are limited to using timings in whole microseconds. Therefore, to get the same resolution as an eight-bit digital to analogue converter you have to set the periodic time of the pulses to 256 microseconds. For 10bits it would have to be 1024 microseconds, and for 12 bits, 4096 microseconds.

It takes a few cycles of the incoming pulse waveform for the averaging circuit to respond to changes in mark-space ratio. Thus

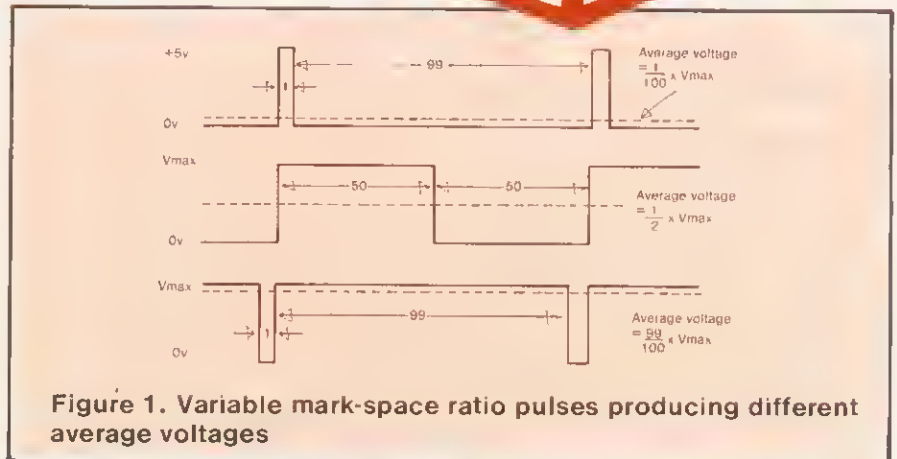


Figure 1. Variable mark-space ratio pulses producing different average voltages

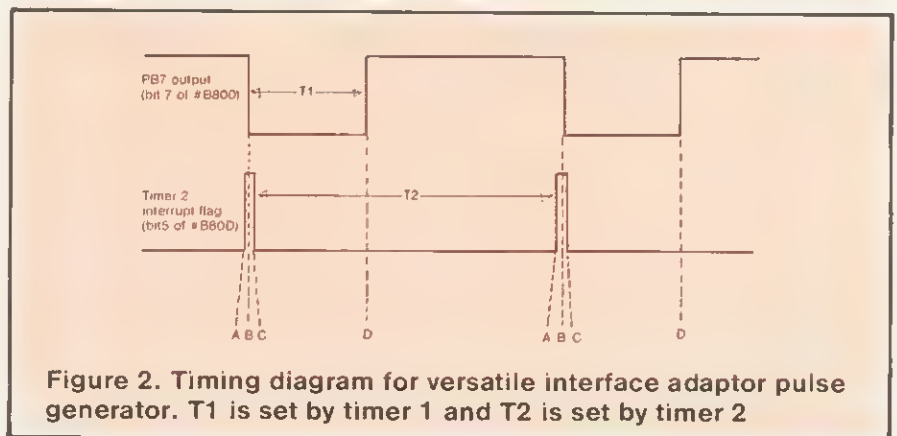


Figure 2. Timing diagram for versatile interface adaptor pulse generator. T1 is set by timer 1 and T2 is set by timer 2

for the equivalent of a 12-bit digital to analogue converter you need a averaging filter with a response time of 10 or 20 milliseconds. This time depends on how much ripple you can tolerate in the output. The higher the resolution you try to get, the longer the periodic time has to be and the more critical the amount of ripple becomes. For example, one-bit variation in an eight-bit digital to analogue converter represents the equivalent of 0.4 per cent ripple, whereas one-bit variation in a 12-bit system is 0.025 per cent ripple.

Although it depends on the application, you may not necessarily have to keep the ripple down to the equivalent of a single-bit variation. It may be sufficient to be able to raise and lower the average voltage, with a resolution of one

part in 4096, even though at a given setting the actual voltage may vary more than this, either side of the average. It depends entirely on the application as to whether you can get away with this.

The actual pulse is generated by the timers on the versatile interface adaptor. Timer one, which can be made to produce an output on PB7, is used to set the 'mark' time of the pulse. Timer two is used to give the overall time of the pulse. The timing sequence is shown in figure 2. At 'A', timer two has just timed out and generated an interrupt. The interrupt routine shown in figure 3 does the job of reloading and hence restarting both the timers. At 'B', the high byte of timer one is loaded, so PB7 goes





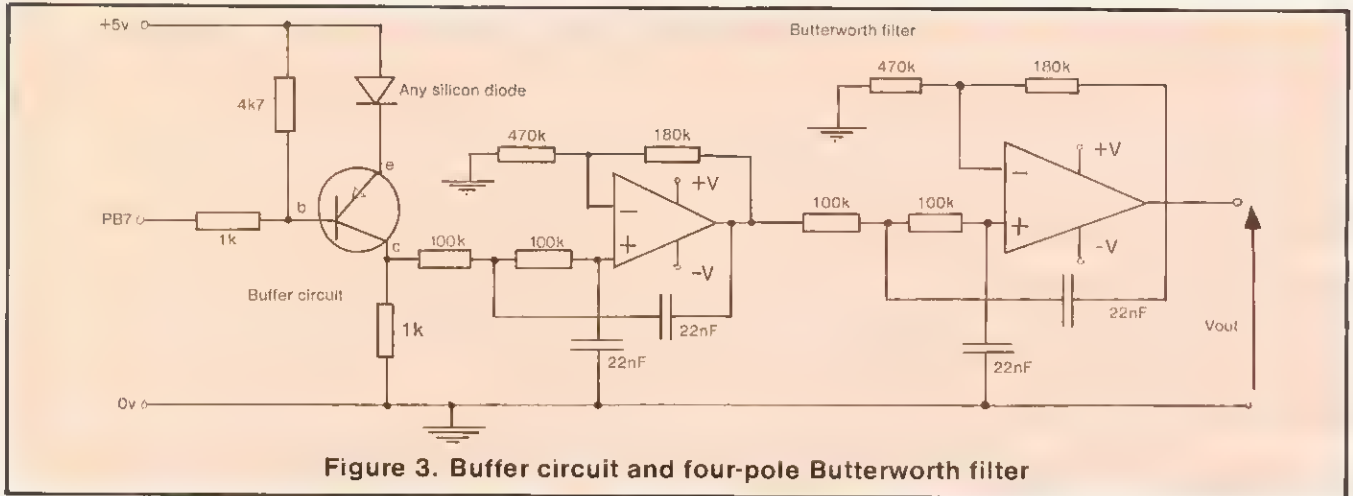


Figure 3. Buffer circuit and four-pole Butterworth filter

low. Then at 'C', timer two high byte is loaded which restarts the timing and clears the interrupt. When timer one times out ('D'), PB7 goes high again. When timer two times out again ('A'), another interrupt is generated and the whole process starts again.

The advantage of using interrupts is that the pulses will continue to be generated, once started, whatever else the processor is doing, unless the interrupt mask is set, in which case the pulses will stop until the mask is cleared again.

**P**rogram 1 is the interrupt routine plus the setting-up of the pulse generator with one particular timing.

Line 10:P is where the routine is to be assembled; I is the interrupt vector; B is the base address of the VIA; M is some free space in zero page for storing high-byte values for the timers.

Line 20 sets the interrupt vector to point to our interrupt routine.

Line 30. B?14 is the interrupt enable register of the VIA. It enables interrupts on the time out of timer two (bit five of the IER). B?11 is the auxiliary control register of the VIA. It sets up the two timers in the 'single shot' mode and enables BP7 to be an output for timer 1.

Line 40. This is the start of the actual routine. Get the high byte from zero page for timer 1.

Line 50. Get the high byte from zero page for timer 2.

Line 60. Restore the accumulator from the stack and return from the interrupt.

Line 70. This shows how to set the high and low bytes of the 'mark' time (in this case #800 = 2048).

Line 80. Set the value of the overall time of the pulse (in this case #1000 = 4096).

Line 90. To get the pulses started in the first place, you have to load the high byte of timer two using byte indirection so that when it times out, the interrupts start. After that the parameters of the pulse can be changed as in lines 70 and 80.

To stop the pulses, simply disable the interrupts by using B?14 = 32. To restart it again, use B?14 = 128 + 32 which re-enables the interrupts and B?9 = 0 to get timer two going again.

**T**he circuit diagram in figure 3 gives a single transistor switch to invert the pulses from PB7 so the time set by timer one gives the on time rather than the off time. The bigger this value, the larger the output voltage will be. Because of the nature of the circuit there tends to be a problem with offset currents in the operational amplifiers. This means that a zero input does not produce zero output voltage and this cannot be adjusted by adding a normal offset zero adjustment potentiometer. This may not matter for a particular application, but if it does, replace the 741s with FET operation amplifiers such as 3140s which are pin compatible with the 741s.

The response time of the filter is set by the four 22nF capacitors. Using this particular value gives a response time in the region of 20 milliseconds which is what you

```

10 P=#3BF0;I=#204;B=#B800;M=#80
20 ?I=P/256;I?I=P/256
30 B?14=128+32;B?11=128
40 LDA M;STA B+5
50 LDA M+1;STA B+9
60 PLA;RTI;J
70 ?M=#0B;B?4=#00
80 ??1=#10;B?8=#00
90 B?9=0
100 END
    
```

Program 1.

would need for a 12-bit equivalent that gives approximately a one-bit ripple. If you want a faster response either because you are prepared to accept a larger amount of ripple or because you are using a lower resolution, reduce the value of these four capacitors accordingly.

The buffer needs a +5 volt supply which can come directly from the computer, but the operational amplifiers need a bipolar supply, ie a positive supply and a negative supply. However, since very little current is needed, you don't need to use expensive mains-powered supplies; a couple of nine volt dry cells will do. It would be a good idea, in that case, to put a 100 nF decoupling capacitor between each supply rail and the zero volts line on the circuit board, as near to the operational amplifiers as possible.

The other point to note is that the interrupt line on the 6522 VIA is not connected to the IRQ line on the computer. If you trace the track on the printed circuit board from pin 21 of the 6522, you should be able to find the link to join it up.



# C.J.E. Microcomputers

BBC Specialists

VAT Included where applicable

## Quality Disk Drives

Single drive 40 track single sided 1 x 100k	£210.00
Qual drive 40 track single sided 2 x 100k	£350.00
Qual drive 40 track double sided 2 x 200k	£546.25
Dual drive 80 track double sided 2 x 400k	£799.25

All drives are cased with own PSU for reliability, and include connecting cables and utilities disk. Delivery £4.00

## Software for the BBC Micro

MISSILE CONTROL the first implementation on the BBC Micro of the popular arcade game. (32K)	£9.00
MAZE MAN an authentic version of the popular arcade game. (32K)	£6.00
BALLOONS a highly original game that soon becomes compulsive playing. (32K)	£6.00
DISSASSEMBLER the memory dump routine includes a scrolling back in memory facility. (16K)	£5.00

MISSILE CONTROL, MAZE MAN and BALLOONS use the Keyboard or Joysticks for control

## 30+ Programs for the BBC Microcomputer

This Book contains program listings, with explanations and tips on using the BBC Micro

## GAMES UTILITIES GRAPHICS and MUSIC

Most programs with common models A and B

Edited by C. J. Evans, various Authors.

A pair of cassettes with all the programs is available.

BOOK	£5.00
BOOK and CASSETTE SET	£9.00

## LEADS

The BBC Micro comes without a cassette lead

7Pin Din to 2 x 3.5mm and 1 x 2.5mm minijacks	£4.00
7Pin Din to 5Pin Din and 2.5mm minijack	£4.00
7Pin Din to 7Pin Din	£4.00
7Pin Din PLUGS	Two for £0.65
6Pin Din PLUGS (for RGB socket)	Two for £0.65
5Pin Din PLUGS (360° for RS232)	Two for £0.65

RS423 TO RS423 (BBC Micro to BBC Micro)  
Two metre cable £4.00 Four metre cable £5.00

TELEVISION/MONITOR LEADS full range available

Phono plug to Co-ax with high quality cable 3 Metres	£3.00
BNC Plug to BNC Plug	£3.10
BNC Plug to Phono plug	
(i.e. BBC Micro to Rediffusion TVRM)	£2.20
RGB 6PIN DIN to 6PIN DIN	1 metre £4.00 2 metre £5.00

## PRINTER CABLES

BBC to 36 way Centronics Type connector	£17.50
BBC to 25 way D Type (For use with RS232)	£ 9.50
BBC to 40 way edge connector (Centronics 739)	£20.00
TORCH to 36 way Centronics Type connector	£20.00

## Blank C30 Computer Cassettes

Ten for £4.50

15 Way D Type Plug with Cover £2.75

Computer graphics design pads 100 sheets £4.00

## BBC Upgrade Kits

RAM UPGRADE (100ns)	£23.00
KIT A Printer and I/O Port	£ 9.50
KIT B Analogue Port	£ 8.00
KIT C Serial I/O and RGB	£10.00
KIT O Expansion Bus/Tube	£ 8.00
Full Upgrade kit	£60.00

All components full specification

## STAR DPB480 PRINTER From £250.00 inc VAT

80 CPS : 80/96/132 COLS  
BIDIRECTIONAL LOGIC SEEKING  
TRACTOR WITH FRICTION FEED

CENTRONICS	£217.39 + £32.61 VAT = £250.00
RS232	£235.00 + £35.25 VAT = £270.25

High Res Graphics option to allow BBC Screen dumps £15.00/£20.00  
(24HR SECURICOR DELIVERY FOR PRINTERS £8.00)

VAT Included where applicable

Send SAE for full Price List of our large range of accessories.

**C.J.E.** POSTAGE Add 50p per order or as stated  
Dept (AU), 25 HENRY AVE, RUSTINGTON  
W.SUSSEX. BN16 2PA (09062) 6647

# Microcomputers



# A J SOFTWARE for BBC

'The Record Changer' 32K £19.95 Cass. £24.95 Disc.  
for indexing, membership lists, directories, inventories, budgeting, etc., etc.

don't buy a database in the dark —  
check the spec!

- \* **Visible File** — Scroll around the file UP/DOWN/SIDEWAYS by function keys
- \* **FULL SCREEN UPDATE** — Use cursor to overtype; character INSERT/DELETE within field; ERASE rest of field; TAB from field to field, etc.
- \* **Sort** — on character and numeric fields
- \* **Search** — for a match on field content
- \* **Select** — select records satisfying conditions on one or more fields; or manually
- \* **Total** — total numeric fields of SELECTED records
- \* **Arithmetic** — combine one or more fields of your SELECTED records with any arithmetic expression; put the result in any numeric field
- \* **Print** — print your SELECTED records with pagination
- \* **Up to a 1000** records, (typically 330 of length 40)
- \* **Up to 20** fields, number of decimal places can be specified for numeric fields
- \* **Utility** — to ADD/CHANGE/DELETE fields

'The Wordsmith' 32K for Centronics 737/739  
£19.95 Cass. £24.95 Disc.

For Reports, Essays, Theses, etc., etc.

Forget control codes — let 'Wordsmith'  
realise your printer's potential

- \* Full Screen text editor with wordspili
- \* Unlimited document size
- \* Page numbering, headings, footings, margins, indentation
- \* Full Support for **proportional**, mono, condensed, elongated and underlined printing
- \* Right justification maintained even when mixing proportional, condensed, elongated on same line

**Simple Word Processor 32K**  
£9.95 Cass. £14.95 Disc.

Simple to use; allows you to set margins, justify text, insert and delete lines of text, set page length or force a page, variable TAB, Multiple copies. Save text on cassette or disc. View text formatted before printing. Works with any printer.

**Options Timetable 32K**  
£14.95 Cass. £19.95 Disc.

A must for every secondary school. This programme helps with the timetabling of pupils 3rd year option choices. Try the effect of any changes to your Options Timetable and let the micro do all the donkey work. Has been in use for the last three years in a 6 form entry comprehensive using a CBM 3032 — now runs even faster on the BBC Model B.

**Not only the cheapest, but the best**  
Switchable 14" RGB Monitor/Colour TV  
£250 inc. VAT and cable, £8.00 corr.

Royalties for quality software

All prices VAT Inclusive

**AJ Vision Service Ltd**  
61 Jeddo Road  
London W12 9ED

As has been said, the BBC board manual is pretty abysmal and contains some errors. The pseudo-variable FALSE has a value of 0, not - 1. It also says you cannot use this board with the Atom DOS. In fact you can, but it's tricky! If you have a BBC Basic program starting at £0900, when you switch back to Atom mode that program will still be there, but it will now be at £2900. You won't be able to read it properly, but it's still there and you can save it as if it were an Atom program, using disc, or, if you have a toolbox ROM, on tape in fast COS.

Similarly, if you have a disassembler, you could use it on BBC programs or, indeed, on the BBC ROMs. To do the latter, you will need to copy the ROM into RAM, and program 1 is a simple block move to accomplish this. The program should be RUN in BBC mode and, on completion, it will give you the base address of the block, as it will appear in Atom mode. You then switch over, load your disassembler into a convenient block and away you go!


BBC Basic 'tokenises' all its keywords into two bytes. This has a number of consequences. First, you have no lower case letters. Second, abbreviating keywords is pointless since they will be printed out in full, when listing, and there is no saving. The final consequence is that, in Atom mode, a BBC program is unreadable, as it displays hordes of graphics characters!

The idea of having a standard graphics screen is a neat one, but it can cause unexpected slowness. What happens is that, if you plot a series of points from, lets say, 0,500 to 1280,500, the system will attempt to plot at every location inbetween. Of course, many of these points do not exist in reality, so a lot of time is spent waiting for the next plottable point to appear. If you want fast graphics plotting in loops, insert a suitable step size.

The Sound command does not work exactly like the BBC micro and the points that concern us here are the values for pitch and duration. The BBC uses values from 0 to 255 for each, whereas, in this implementation, values between 0 to 65535 are used, so, again,

**Last month Barry Pickles reviewed Acornsoft's BBC Basic board for the Atom. Here, he gives some ideas on using it**

## HINTS ON USING THE BBC BOARD

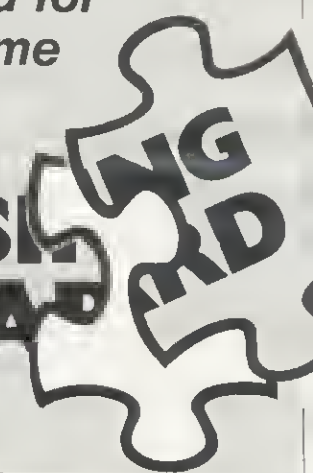

### Program 1.

```

10REM-BLOCK MOVE
20 INPUT"START ADDRESS OF BLOCK" A$:START%=EVAL(A$)
30 INPUT"END ADDRESS OF BLOCK" A$:FINISH%=EVAL(A$)
40 SIZE%=FINISH%-START%:DEST%=&1000
50 IF SIZE%>4096 PRINT"NOT ENOUGH SPACE":RUN
60 FOR LOOP%=START% TO FINISH%
70 ?DEST%=?LOOP%:DEST%=DEST%+1
80 NEXT
90 PRINT"MOVE COMPLETED - SWITCH TO ATMBASIC"
100 PRINT"WHERE THE BLOCK BEGINS AT £3000"

```

### Program 2.

```

10REM-DRAW TRIANGLES
20REM-DEMONSTRATION
30 MODE 0
40 FOR LOOP%=0 TO 10
50 PROCPLDT85(RND(1000),RND(1000),RND(800),RND(800),RND(600),
RND(600))
60 NEXT:END
899REM-PLOT85
900 DEFPROCPLDT85(XMOVE%,YMOVE%,XDRAW%,YDRAW%,
XAPEX%,YAPEX%)
910 MOVE XMOVE%,YMOVE%
920 DRAW XDRAW%,YDRAW%
930 DRAW XAPEX%,YAPEX%
940 DRAW XMOVE%,YMOVE%
950 ENDPROC

```



scaling will be required. Note that each single value is approximately one eighth of a note, on a musical scale. Further, the BBC micro has a buffer, which allows successive notes to be 'queued'. There is no buffer here and you must make sure that one note is completed before playing the next, otherwise the program will crash! To complicate matters further, the sound is 'interrupt driven', so the program will continue execution, even though the note has not finished. Setting the duration of the note to zero produces an 'endless' tone.

**M**any users will be aware that, on the Atom PCB, there are three unused address lines in the 'text RAM' area, and it is possible to piggyback extra RAM to fill memory from £2000 to £27FF and from £3C00 to £3FFF. If you have the latter, there is a possibility that any data sent, in BBC mode, to locations between &1C00 and &1FFF, will be corrupted. This is because Acorn really intended this area to use ICs 51 & 52 (normally block-zero on the Atom) but, with a piggyback, the system can end up trying to send data to both sets of RAM, with unforeseen consequences! There is, however, a simple 'fix'. This is to remove IC12 (on the BBC board), **carefully** bend outwards pin six and replace the IC in its socket. Now, solder a wire from (the disconnected) pin 6 to any +5v line - there's one on the VIA. The effect is to completely disable ICs 51 & 52, when in BBC mode - of course, they work normally in Atom mode. This should only be done if you have RAM at £3C00. Any piggybacking for addresses below £2800 should be removed completely, since this is already provided on the BBC board.

**A**s for 'proper' memory expansion, Acorn have provided for an 8k expansion, from &2000 to &4000 in BBC mode. I assume (since I don't know anyone who has one), their own 8k card will work but, as for larger boards (eg Timedata, Audio Computers, Watford etc), these will only work by altering the addressing links, so that they begin

**Table 1. Operating system vectors**

Location	Type	Vector
0200	Reserved	FFFF
0202	BRK	B42D
0204	IRQ	8000
0206	Reserved	----
0208	Command Line Interpreter	F775
020A	BYTE	F0D2
020C	WORD	F000
020E	Write Character	F54F
0210	Read "	FE6D
0212	Load/Save	F71A
0214	Reserved	----
0216	BGET	FBC1
0218	BPUT	FC51
021A	Reserved	----
021C	FIND	FC0B

All addresses are shown in Hex format.

**Program 3.**

```

10 REM-ALL STRINGS MUST BE DIMENSIONED
20 DIM AS(7), ALIENS(7), BLANKS(7), ROW%(7)
29 REM-DEMONSTRATION
30 MODE 0:ALIENS="" :BLANKS=""
40 PROCVDU23(ALIENS,0,24,126,183,255,36,90,129)
50 PROCVDU23(BLANKS,0,0,0,0,0,0,0)
60 FOR C% = 1 TO 10
70 PROCPT(ALIENS,C%,4)
80 FOR N = 1 TO 1000:NEXT N
90 PROCPT(BLANKS,C%,4)
100 NEXT C%:END
999 REM-DEFINE CHARACTER PLUS STORE IN STRING
1000 DEFPROCVDU23(AS, ROW%(0), ROW%(1), ROW%(2),
1010 ROW%(3), ROW%(4), ROW%(5), ROW%(6), ROW%(7))
1020 AS = AS + CHRS (ROW% (LOOP%))
1030 NEXT LOOP%
1040 ENDPROC
1998 REM-PUT CHARACTER ON SCREEN AT COLUMN X%, ROW Y%
1999 REM-32 COLS BY 24 ROWS IN MODES 0 TO 3
2000 DEFPROCPT(AS,X%,Y%)
2010 Y%=(Y% - 1) * 256
2020 BYTE%=&4000 + X% + Y%
2030 FOR LOOP%=0 TO 7
2040 ?BYTE%=ASC(MIDS(AS,LOOP%,1))
2050 BYTE%=BYTE%+32
2060 NEXT LOOP%
2070 ENDPROC
    
```

at &2000. Note that only the first 8k will be addressed.

Finally, there are two areas of block-zero RAM available for the user. These are from &70 to &8F (32 bytes) and &021E to &02FF (225 bytes). All OS calls are indirected through vectors at &0200 to &021D. In this way, you can add your own routines, by altering these vectors to point to the address of your own routine. Table 1 gives the available OS vectors.

To round off, programs 2 and 3

provide two of the 'missing' functions - PLOT 85 and VDU 23 - so that you may implement published games programs. Program 2 is easy to follow, but you should remember that, in normal BBC programs, the co-ordinates represented by XMOVE% to YDRAW% have already been defined before the call to PLOT 85. These programs could be more elegantly written, but they will give an idea of how to overcome some of the challenges presented by routines not implemented on this board. ●

# Eltec HOME & BUSINESS TECHNOLOGY computers

Probably the widest selection of software available by mail order.

All the top manufacturers including Acorn Soft, IJK (Sinclair), Superior Software, Bug Byte, Program Power, Hessel, Procyon.

## HERE IS A SELECTION

Peeko Computer	9.95
Junior Maths Pack	6.84
Philosopher's Quest	9.95
Planetoid	9.95
Meteors	9.95
Arcadians	9.95
Swoop	7.99
Chess Model B	7.99
Space Invaders Model B The best	6.95
Atlantis — Superb fast Action 32K	6.95
Hyperdrive 32K	5.95
Stratobomber	6.95

Send SAE for full list.

## HARDWARE EXPANSION

Sound pick-off module (simple to fit)	6.95
Amplifier and loudspeaker suitable for above	37.50
Light pen	34.50
X-Y digitiser	80.00

## SUPER ACCESSORIES

Cover Polyester Cotton	3.97
Cover Soft PVC	4.45
Carrying Case for Computer, Cables, Cassette/ Disc Drive	55.20
Carrying Case a soft supported nylon version of above	23.00

## BBC models A & B in stock: A - £299 B - £399

### DISK DRIVES FOR BBC

BBC 100K Single drive (Requires discs (a))	265.00
TORCH Z80 800K Disc pack includes Z80 proc'r + 64K (b)	897.00
BBC/LVL 200K Twin Drive (a)	397.00
TEAC 200K Single Drive (a)	304.75
TEAC 400K Twin Drive (a)	569.25
TEAC 400K Single Drive (b)	396.75
TEAC 800K Twin Drive (b)	711.85
Connecting cable for TEAC drives	17.25
(a) SCOTCH Single sided discs Box of 10	28.75
(b) SCOTCH Double sided discs Box of 10	39.80

### BBC UPGRADES

Full upgrade kit (fitting £31.00)	69.00
Disc interface (fitting £15.00)	109.25


The above prices are VAT inclusive. Add £1.00 p&p for orders below £100.00 and £10.00 (Secure delivery) for orders above £100.00.

Access and Barclaycard accepted on all items except BBC computers.

## ELTEC COMPUTERS

217 Manningham Lane, Bradford, BD8 7HH.  
Tel (0274) 722512.

## 3D COMPUTERS

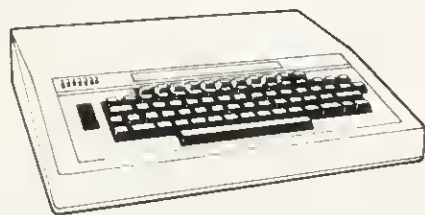

## THE ACORN SPECIALISTS

## BBC Micros Ex-stock

### Peripherals

PRINTER  
COLOUR MONITOR  
DISKS  
TORCH Z80 DISKS  
CASSETTE RECORDER

### Software

ACORN SOFTWARE  
BBC SOFTWARE  
PROGRAM POWER  
BUG-BYTE



### Add-ons

JOYSTICK  
LIGHT PEN  
GRAPHICS TABLET  
TELETEXT  
Z80 PROCESSOR  
6502 PROCESSOR  
MEMORY UPGRADE  
DISK INTERFACE

### Books

30 HOUR BASIC  
BBC BASIC  
BBC MICRO REVEALED  
LET YOUR BBC TEACH  
LEARNING TO USE BBC  
ASSEMBLY LANGUAGE

### AGENT FOR WARRANTY REPAIRS & SERVICE

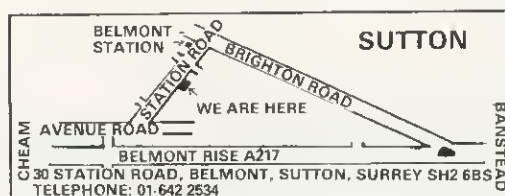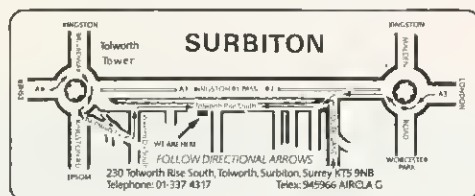





# BEEBUG FOR THE BBC MICRO

REGISTERED REFERRAL CENTRE FOR THE BBC PROJECT

BRITAIN'S LARGEST SINGLE — MICRO USER GROUP


## MEMBERSHIP NOW EXCEEDS 13,000

13,000 members can't be wrong—BEEBUG provides the best support for the BBC Micro. BEEBUG Magazine—now 54 pages—devoted exclusively to the BBC Micro. Programs—Hints & Tips—Major Articles—News—Reviews—Commentary. PLUS members discount scheme with National Retailers. PLUS members Software Library. 10 Magazines a year. First issue April 1982. Reprints of all issues available to members.

### SCREEN SHOTS FROM PROGRAMS IN BEEBUG MAGAZINE




RACER  
NOVEMBER  
1982



ENVELOPE  
EDITOR  
NOVEMBER 1982



SPACE  
CITY  
DECEMBER  
1982



3D SHAPE  
DECEMBER  
1982



ARTIST  
Painting by  
Joystick  
DECEMBER 1982

**April Issue:** 3D Noughts and Crosses, Moon Lander, Ellipse and 3D Surface. Plus articles on Upgrading to Model B, Making Sounds, and Operating System Calls.

**May Issue:** Careers, Bomber, Chords, Spiral and more. Plus articles on Graphics, Writing Games Programs, and Using the Assembler.

**June Issue:** Mazetrap, Mini Text Editor, Polygon; plus articles on upgrading, The User Port, TV set and Monitor review, Graphics part II, More Assembler Hints, Structuring in BBC Basic, plus BBC Bugs.

**July Issue BEEB INVADERS** and other programs—plus articles on using the Teletext mode, BBC cassette bugs fix, Software Review, using user defined keys. More on structuring in Basic. Using the User Port, and many hints and tips.

**September Issue:** High/Low Card Game, and Hangman Programs. Articles on Logic on the Beeb, Debugging, Moving multicoloured characters, creating new colours, Operating system 1.1. Plus Postbag, Hints and Tips, and Procedure Library.

**October Issue:** Program Features: Alien Attack; Calendar Generator; Union Jack; Memory Display utility. Plus articles on Beebugging; Improving Key Detection; Acorn Press Release on O.S.H.2; and Issue II Basic; The Tube and Second Processor Options; or New Series for less experienced users; and Software Reviews.

**November Issue:** Program Features: Racer (excellent 16K racing car game), Mini Text Editor (Mk2), Transparent Loader, Music with Memory, Harmonograph Emulator, New Character set for Modes 2 & 5; and cassette block-zero—bug retrieve. Plus articles on sound and envelope design—includes indispensable envelope editor program; Debugging Part 3, BBC Basics—Memory Maps and addressing explained; Serial Printer Port (RS423) and RGB upgrade. Plus a large number of Hints & Tips, and a guide to our past issues and their contents.

**Dec/Jan Issue:** Program Features: Space City (invader-type game), Breakout, Artist (Joystick painting program); Rescue (miraculously retrieves programs after bad loading or 'Bad Program' message); and Pack—a program to compact Basic programs. PLUS Disc System Review, Software reviews—including Wordwise, Book reviews, Adding Joystick interface to model A; How to access the video controller chip; and ideas for the newcomer; plus a new crop of Hints and Tips.

### BEEBUGSOFT: BEEBUG SOFTWARE LIBRARY

offers members a growing range of software from £3.50 per cassette.

- 1. Starfire (32K). 2. Moonlander (16K). 3D Noughts and Crosses (32K). 3. Shape Match (16K). Mindbender (16K). 4. Magic Eel (32K). 5. Cylon Attack (32K). 6. Astro-Tracker (32K).

Utilities: 1. Disassembler (16K). Redefine (16K). Mini Text Ed (32K).

Applications: 1. Superplot (32K). 2. Masterfile (3K).

**13% DISCOUNT TO MEMBERS ON THE EXCELLENT WORDWISE WORD PROCESSING PACKAGE— THIS REPRESENTS A SAVING OF OVER £5.00.**

Send £1.00 & SAE for Sample

Membership: UK 5.40 for six months, 9.90 for one year.

Overseas one year only: Europe £16.00, Middle East £19.00, Americas & Africa £21.00, Other Countries £23.00

Meka cheque to BEEBUG and send to: BEEBUG Dept 13, 374 Wandsworth Rd, London SW8 4TE

Send editorial material to: The Editor, BEEBUG, PO BOX 50, St. Albans, Herts AL1 2AR

# ON THE TRAIL OF INTELLIGENCE

## Simon Dally introduces this month's competition with the tale of the Turkish delight which fried

Long before computers were invented people were fascinated by 'intelligent' machines which appeared to have a will independent of their maker. Even today we can be mesmerised by dumb machinery such as toyshop 'robots' doing tasks which would excite no interest if carried out by human beings.

In 1769 an engineer named von Kempelen astounded the Viennese Court with a machine called The Turk. It consisted of a life-size human figure dressed in a turban and seated in front of a box, the top of which was a chessboard.

To the amazement of the spectators, not only did the machine talk, it also appeared to be voice-activated. It had a vocabulary of around 30 words and, via a complicated system of levers, grabs and pulleys, could move both its own and its opponent's pieces. Even more intriguing, it beat virtually everyone who challenged it.

Over the next few decades the machine went on tour. It played against Napoleon, and in Berlin attracted 100,000 paying spectators in three months.

Numerous accounts appeared speculating about The Turk, one by Edgar Allan Poe claiming there must be a human chess-player concealed inside it.

A sceptical American reporter, in the best Lou Grant tradition, noted that wherever The Turk appeared, the local chessmaster was not to be found. More pertinently, a cry of 'Fire!' would make the machine rock violently!

We shall never know how this contraption worked (it perished during a fire in Philadelphia in 1854), but the likely explanation is that a dwarf or small adult was concealed within the machine, while a strong player would be part of the audience, passing on coded signals.

In the computer age of artificial intelligence - whether machines

can be made to behave more cleverly than ourselves - has provoked considerable and acrimonious debate, both theoretical and practical.

One of the pioneers of computer theory was Alan Turing, who devised a test for AI. In essence this laid down that if you put someone into a room with no indication of who or what he was communicating with (eg a teletype machine), would he be able to recognise what was at the other end?

In the 1960s, another pioneer in the AI field, Joseph Weizenbaum of MIT, developed a program called *Eliza*, versions of which are available on several micros.

'Talking' to *Eliza* is both intriguing and frustrating. *Eliza* acts the part of a sympathetic psychoanalyst, probing away and making sympathetic noises - but never offering solutions.

In 1968 at MIT an incident occurred which has since passed into folklore. One version goes as follows. A student came into a computer room one night seeking to use a terminal. The only unoccupied one had a note attached to it saying, 'This terminal is reserved for Dr Bobrow'. Knowing Bobrow often worked from his home terminal, the student dialled it up (so he

thought - in fact he hooked into *Eliza*) and the following conversation ensued:

*Student:* Can I borrow your computer terminal tonight?

*Eliza:* Why should you wish to borrow the computer tonight?

*Student:* Because I want to do some work.

*Eliza:* Is your work important to you?

*Student:* Yes

*Eliza:* I see.

*Student:* Well???

*Eliza:* What do you mean, 'Well'?

*Student:* Can I use your computer time?

*Eliza:* Let's discuss further why your work is important to you.

After ten minutes in this vein, getting nowhere, the enraged student telephoned Dr Bobrow at home, rousing him from sleep, and the sublime descended to the ridiculous:

*Student:* What the hell do you think you're playing at?

*Dr Bobrow:* What do you mean, what the hell do I think I'm playing at?

It is arguable that the machine passed the Turing Test with flying colours, though a purist might object on the grounds that the human being had not been told his task was to distinguish between man and machine.

### PROBLEM

A RAFFLE was conducted at the Christmas Computer Convention. The tickets, numbered from one upwards consecutively, were sold from booklets, each of which contained the same number of tickets. All tickets which had one or more digits the same in their number were printed on grey paper. Tickets whose numbers consisted of totally different digits were printed on yellow paper.

There were an equal number of grey and yellow tickets and all tickets were sold. Funnily enough, only one booklet consisted entirely of tickets all of the same colour and by an odd coincidence the winning ticket was exactly the middle ticket of this booklet. The second prize was won by the person who had bought the highest numbered ticket.

What were the respective winning numbers? Answers on a postcard please to March Competition, *Acorn User*, 53 Bedford Square, London WC1B 3DZ, to arrive not later than Tuesday, April 5. Two Acornsoft packages go to the lucky winners (please state which machine you have.)



# For the best hardware, the best software.

The BBC Microcomputer system is generally regarded to be the best micro in its price range you can lay your hands on. So, if you're thinking of buying one or already own one, you'll want to know about the software that's been specially designed for it.

Not surprisingly, it's made by Acornsoft, the software division of Acorn Computers Ltd., who designed and built the BBC Microcomputer. So naturally you can expect the highest quality software with the built-in ingenuity to fully exploit the BBC Miro's potential.

## Further education for everyone.


Creative Graphics, which includes the book 'Creative Graphics on the BBC Microcomputer' (price £17.45), provides 36 programs on cassette producing a spectacular range of pictures and patterns in full colour, including animated pictures, recursively-defined curves and three dimensional shapes.

Word Sequencing (price £11.90) contains three word sequencing programs on cassette. Each program presents a series of jumbled words which must be arranged on screen to form

either a proverb, nursery rhyme title or a sensible sentence.

## Learn more languages.

LISP (price £24.35) is the fundamental language of artificial intelligence research.


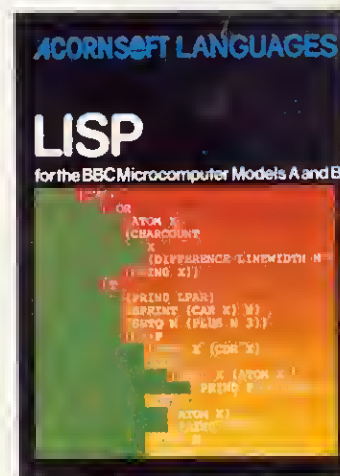


It consists of 5.5K of machine code interpreter, plus 3K of initialised LISP work-space containing utilities and constants. It comes complete with a book that introduces you to programming in LISP, as well as some fascinating applications.

FORTH (price £24.35) is a complete implementation of the FORTH language to the 1979 standard specification for the BBC Microcomputer Model B. This much acclaimed programming language is also accompanied by a specially written book explaining all you need to know.

## Mind-boggling games.


Philosopher's Quest (price £9.95) is an advanced adventure in which you tell the computer what you want to do and it

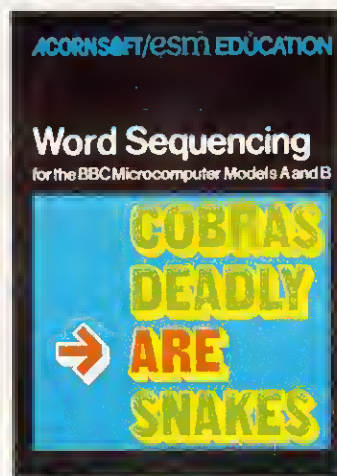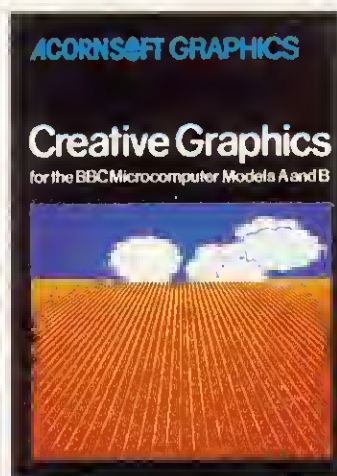

ACORNSOFT GAMES

### Philosopher's Quest

for the BBC Microcomputer Model B



ACORNSOFT GAMES

### Snapper

for the BBC Microcomputer Model B



ACORNSOFT GAMES

### Rocket Raid

for the BBC Microcomputer Model B



more by sending for our free catalogue.

#### How to get Acornsoft programs.

If you're a credit card holder and would like to buy cassettes of the programs shown in this advertisement, or if you would like to know the address of

your nearest stockist, just phone 01-200 0200.

Alternatively, you can buy the cassettes directly by sending off the order form below to: Acornsoft, c/o Vector Marketing, Denington Estate, Wellingborough, Northants NN8 2RL. Also use this form if you would like to receive the current free Acornsoft catalogue.

Please allow 28 days for delivery.

☎ Credit Card Holders. Ring 01-200 0200.

describes back in plain English your progress through a fascinating world of fiendish puzzles to be solved.


Snapper (price £9.95) is a colourful game where you guide your 'snapper' through the maze, eating dots and fruit and avoiding the creatures that chase you. Complete with full sound effects, score and a ladder of high scores.

Rocket Raid (price £9.95) sends you on a mission to raid a heavily guarded Martian fuel depot. You must fly your rocket over mountains and through caverns, avoiding enemy missiles and dodging convoys of deadly fizzers.

#### Increase your business acumen.

Desk Diary (price £9.95) is an indispensable program that can hold a file of several hundred names, addresses and telephone numbers.

And View, a program that enables your machine, together with a printer, to operate as a fully operational word processor. (The program is in ROM, but can easily be fitted to most BBC Micros by your local dealer.) You can find out

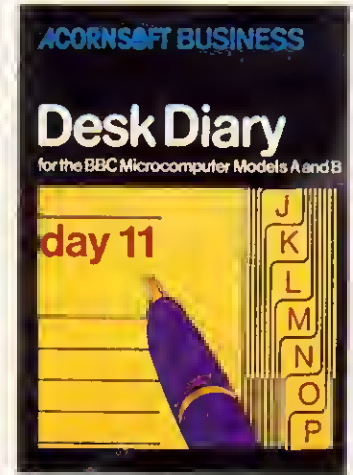

To: Acornsoft, c/o Vector Marketing, Denington Estate, Wellingborough, Northants NN8 2RL.

Please send me the following:-

PROGRAM	PRICE	QUANTITY	TOTAL	(Code Acornsoft use only)
Creative Graphics	£17.45			(SBN01/SBD01)
Word Sequencing	£11.90			(SBE06)
LISP	£24.35			(SBI.02/SBI04)
FORTH	£24.35			SBI.01/SBI03)
Philosphers Quest	£9.95			(SBC01)
Snapper	£9.95			(SBC04)
Rocket Raid	£9.95			(SBC05)
Desk Diary	£9.95			(SBB01)

TOTAL \_\_\_\_\_

I enclose PO/cheque payable to Acornsoft Ltd. Or charge my credit card.

Card Number \_\_\_\_\_  
Amex/Diners/Visa/Access (Delete)

Please send me the Acornsoft brochure.

Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

Signature \_\_\_\_\_

Registered No. 1524763

VAT No. 215 8123 85

# ACORNSOFT



# BBC SOFTWARE

**EDUCATIONAL-1** A or B £8.05  
Hours of fun and learning for children aged 5 to 9 years. Animated graphics will encourage children to enjoy maths, spelling and telling the time. The tape includes MATH1, MATH2, CUBECOUNT, SHAPES, MEMORY (Model B only), SPELL and CLOCK.

**EDUCATIONAL-2** A or B £8.05  
Although similar to Educational-1 this tape is more advanced and aimed at 7 to 12 year olds. The tape includes MATH1, MATH 2, AREA, MEMORY (Model B only), CUBECOUNT and SPELL.

**GAMES OF LOGIC AND CUNNING** A/B £9.20  
For children and adults alike. The tape includes AUCTION, FLIP, REVERSE, TELEPATHY and ROTATE.

**SUPERLIFE** B £9.20  
Fast (machine code) version of a popular 'Game of Life' in a large universe. Can you produce 'Blinkers', 'Spinners', 'Gliders' and 'Spaceships' or have you only wondered what they look like? All this in Superlife and more as this tape includes 'Competitive Life' with the Reds and the Blues competing for space; perhaps you can alter their evolution.

**KATAKOMBS** B £9.20  
Are you cunning enough to discover and seize the treasure in the Katakombs AND return alive? What and where are your enemies? Can you outwit them? Yes? Then your adventure will take you through unending forests, beside tumbling streams, over lonely plains to desolate ruins and finally underground to the tortuous Katakombs.

**UTILITIES** A/B £8.05  
Behind the mundane title lies an assortment of useful procedures and functions which can save you hours/days of programming effort: date conversion, input and validation routines, graphic routines (cube, rectangle, etc), sorts, search and many more.

\*\*\* **SPECIAL OFFER** \*\*\*  
- Any 3 cassettes for £20.70

Add 50p p/p per order.  
Please state your Model and quote ref. AC

Cheque/PO to: **GOLEM LTD**

77 Qualitas, Bracknell, Berks RG12 4QG. Telephone: (0344) 50720

# SRM

Software  
Research &  
Marketing

**BBC**  
model B

- P+P INCLUDED ● Delivery in 8 days
- We test software not you!
- ALL ONLY £6-50 EACH

**INVADERS**



Superb version of the old classic arcade game, 48 marching invaders drop bombs. Increasing difficulty, hi-score, superb graphics and sound.

**GALAXIANS**



Fast action version of the popular arcade game. 6 skill levels, rankings, bonus laser bases and increasing difficulty. Superb sound effects and graphics.

**CENTIPEDE**




Incredible arcade type game featuring mushrooms, snails, flies, spiders and centipedes. 6 skill levels, increasing difficulty bonuses, and rankings. Excellent graphics and sound.

Cheques &  
P.O.'s to  
"SRM"

SRM  
542, Manchester Rd.  
Bury, Lancs. BL9 9PA

## TIMESHARE YOUR COLOUR MONITOR WITH THE FAMILY

£299 inc.VAT

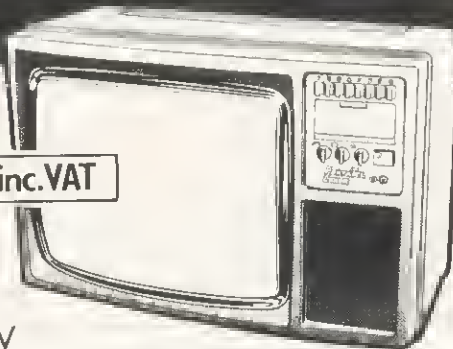

**COLOUR TV**  
PLUS RGB MONITOR PLUS PAL VIDEO AND AUDIO

PortaTel-LUXOR RGB 3711



EXCELLENT  
RESOLUTION  
AND GEOMETRY

BBC MICRO LEAD INCLUDED

**PORTATEL CONVERSIONS LIMITED,**  
25 SUNBURY CROSS CENTRE,  
SUNBURY-ON-THAMES,  
MIDDLESEX TW16 7BB  
Telephone: Sunbury-on-Thames 88972



**WCC** Windsor Computer Centre  
For Acorn/BBC in Berkshire

On display in our  
Showroom:-

- \* BBC Model A & B
- \* Acorn Atom
- \* Tandy Microcomputers
- \* L.S.I. System M3

In Stock:-

- \* Acornsoft software for BBC & Atom
- \* Eduquest software for BBC
- \* Books & Games
- \* BBC Model A & B
- \* Acorn GP80 Printers
- \* Epson & Tandy Printers
- \* Colour Monitors
- \* Green screen Monitors
- \* Cassette Recorders
- \* Acorn Atoms at special prices
- \* BBC Disk Drives
- \* BBC Upgrade kits
- \* Call us now for prices & advice

Open Weekdays 9.30am-6pm Saturday 10am-5pm  
1 Thames Avenue, Windsor, Tel: Windsor 58077 (4 lines)

# ASSEMBLY WITH THE BEEB

□ *Assembly language programming for the BBC micro by Ian Birnbaum, Macmillan, 305pp, £8.95*

THE cover material proclaims this book will appeal to three types of reader. First, owners of BBC machines who wish to delve into assembly language programming; second, the student or teacher of computer science requiring a structured course, and third, the person with a knowledge of Basic who is thinking of buying a BBC machine. The book does contain material appropriate for each category, but the attempt to be all things to all men results in a book not ideally suited to any. However, Ian Birnbaum has pieced together a considerable amount of material making it a useful source of information.

In common with other recent books, the author relies heavily on relating assembly language programming to imitating the statements and structures of Basic. The limitations of this approach in its assumption that most people quickly pick up elementary Basic are unimportant if those that don't are not going to be interested in assembly language programming. This assembly language comparison to Basic works well in places. In particular one chapter gives a clear introduction to loop structures by contrasting the FOR . . . NEXT and REPEAT . . . UNTIL structures of Basic with their assembly language counterparts.

The BBC assembler is almost unique in terms of its friendliness, ease of use and the accessibility of operating system routines. It is these features that one might expect the book to make use of early on, but, disappointingly, this is not the case. It opts instead to stay with a conventional 'computer science' start - block diagrams of computer systems and an ample helping of binary arithmetic. Throughout the book are numerous exercises for the reader to try, solutions for which are provided.

Many programs are included, although most are poorly laid out

listings produced on a dot matrix printer. Nowhere to be seen is there a copy of any output produced by the assembler. Comments follow the listings in the style - 'lines 20-50' and a description of the section. This has resulted in comment appearing several pages adrift of the listing in some cases. How comments appear is perhaps just down to personal preference, but the right hand side of an assembly language listing is usually empty so why not use it?

The programs are, nevertheless, useful, including a high resolution screen copy, a monitor program and several sort routines. One chapter consists entirely of such utility programs.

One omission is a full treatment of the Beeb's powerful CALL statement. The ability to pass numerous parameters to a machine code routine from Basic is a valuable feature of the BBC machine. Even the standard operating system calls receive limited attention yet it is in these

areas that the BBC machine allows the assembly language programmer to get a lot out of the machine with little effort.

Also marketed, but not available with the review copy of the book, are two software cassettes (£9 each). As well as programs from the text the tapes contain four additional utility programs including a disassembler.

The race to produce the first book on assembly language for the BBC micro has been won. The author has done his bit by supplying plenty of useful material, but more care and control at the publishing stage would undoubtedly have improved the end product.

It contains much useful information (without an index) which may appeal most to the enthusiast, but it does not provide the gentle introduction necessary to woo the novice into the delights of assembly language programming on a very special machine.

John Ferguson  
Tony Shaw

## IT'S AS CLEAR AS MUDD

□ *Pascal from Basic by Peter Brown, Addison Wesley, 183pp, £6.95*

**FROM its title, you might think this book is intended solely for those learning Pascal as a second computer language. This is emphatically not the case: the book is more a treatise on general programming style.**

**Professor Brown is an experienced teacher and skilled author. He has produced a book which is a fine amalgam of lucid, witty writing and clear, detailed information. His explanation of the world of Pascal is ably assisted by such characters as Professor Pimple, an academic devotee of Pascal, whom**

**nobody understands, Bill Mudd, a stubborn devotee of Basic, whose programs never quite work and Mr Perkins the security man, keen on reliability.**

Users of Basic with BBC machines may consider some of the criticisms of their language unfair. This is because Professor Brown has unfortunately chosen to use the rather old ANSI minimal Basic for his standard. BBC Basic has learned from the block-structured languages.

This book is however far from being an attack on Basic. Where praise for the language is deserved such as in string manipulation, it is given. The

page 80 ►



# THE PLOTS THICKEN

► from page 79

□ *Graphs and charts on the BBC microcomputer* by Robert Harding, Acornsoft, 104pp, £7.50 (cassette £9.95)

THIS is a set of mathematically-oriented, graph-plotting utilities written as Basic procedures. These are 'compiled' into complete programs using the \*EXEC command to extract programs from the cassette. The material covered includes histograms, pie-charts, plotting functions of one and two variables and stereo views of functions of two variables. The book consists of procedure listings, a description of each procedure and how to use it, and a liberal number of illustrations of the utilities in use.

The material is ordered into three levels to enable high or low level access, depending on the user's requirements. Level three, the highest, includes complete programs ready to run, that are loaded using CHAIN. These are then supplied with data from the keyboard, or a function is selected to generate the data points. For example, when using the level three histogram program, points are supplied, one at a time from the keyboard, together with a selection of options such as colour, bar base, width and title.

In level two, a procedure, rather than a complete program, is used and this has to be supplied with the data set up in global arrays, together with option selection as procedure parameters.

**T**his is an excellent approach from an educational viewpoint, a user being taken through the facilities available in each utility, before moving on to tailor the utility for his own purpose. Indeed, the value of the package is likely to be as an adjunct to the teaching of secondary school mathematics.

Level one the lowest level, is similar to level two as far as 'compiling' is concerned, but allows access to more detailed facilities,

setting as a mathematical to plotting transformation and setting viewpoints so more than one graph can be displayed on the screen.

In both level two and level three complete example programs are given showing how the procedures should be driven. Incidentally, one practice the author adopts is to start the names of all global variables with "" which is a good way of preventing logical errors due to the programmer selecting variable names identical to those intended for global variables.

The book is clearly written and nicely produced with a spiral binder. Because of their generality, the procedures are lengthy and unless you are desperate to save £9.95 or only want to use one or two utilities, I would not recommend purchasing the book without the cassette.

**H**owever, I have three quibbles. First the book is rather expensive for 104 pages, but I suppose you are purchasing a software package rather than a text book. Second the Basic is written in traditional style (although it's an improvement on some of the stuff you see around). Little use is made of mnemonic variable names, spacing and indentation to highlight program structure. I find this somewhat disappointing given that BBC Basic programs can be made much more readable with the facilities available in the dialect. Contrary to popular opinion, writing readable programs only has a marginal effect on interpreter run time. Readability is important with a product such as this if a reader, for example, wanted to muse through the procedures to familiarise himself with graph drawing techniques.

Finally, the surface plotting procedures suffer from the lack of hidden line removal. This is not particularly arduous either in run time overheads or algorithmic complexity for this special case. Without hidden line removal some of the illustrated functions look like crushed balls of chicken wire.

Alan Watt

author is quick to point out areas where Basic would be the better language to use. Occasionally this endeavour for fairness is taken to extremes. For example, it is true that the speed of Basic as compared to Pascal depends on the implementation, and that Pascal can be slower than Basic. However, as far as micro users are concerned most Basics are interpreted or at best partly compiled, whereas Pascal is invariably fully compiled at least as far as P-code and runs much faster. For many micro users this is the main criterion for switching to Pascal.

Professor Brown has also given a brief overview of operating systems, a subject generally unfamiliar to users of Basic. What most micros describe as an operating system is in reality just an operating system kernel, providing primitive facilities, such as reading and writing characters, opening files and so on. Basic then provides the operating system command program, with high-level instructions

The BBC micro and Acorn Atom are unusual in having operating systems that also provide high-level commands (for instance, \*LOAD, \*FX), but even these are rudimentary compared with a fully-blown operating system, such as Unix. Pascal is not interactive like Basic, and so requires an environment (provided by the operating system) to work in. This book gives readers an insight into such environments.

By far the most impressive features are the comments throughout on programming style. It is here that this book will benefit all programmers, whether schooled in Basic, Pascal or other languages. The author emphasises readability and there is a marvellous section on the evils of GOTO.


Lastly, there is great detail on writing large programs which are easily maintained. If you wish to improve your programming ability this is an enjoyable way to do it.

Jeremy Bennett

# Draw with the BBC micro and show the true potential of your machine

- Fill complex shapes in any one of 20 colours
- Draw points, lines, rectangles, ellipses and circles
- Smooth curves
- Draw wire frame diagrams
- Draw in 3rd dimension
- Measures distances which are displayed
- Displays actual foreground colour
- Store up to 10 ellipses or circles in memory
- Re-draw any one of these at cursor position
- Change any one colour for another
- Ekta sketch lines, Half-tone facility
- Clear screen, load screen, save screen
- Print characters or numbers at any pixel point
- Error messages for incorrect input
- Fully comprehensive manual

356 496 • □ •••

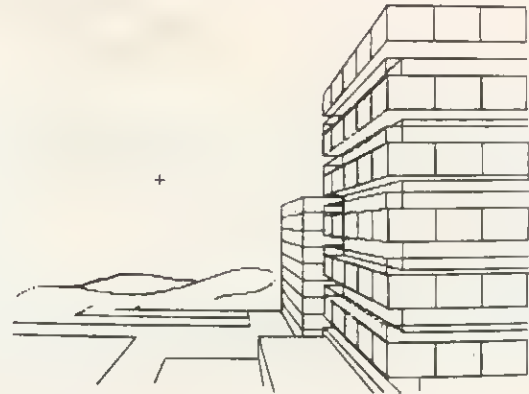

Listed above are some of the functions available for the BBC "E" Micro, however, there is an edited version for the BBC "A" machine. This programme has been purpose designed for simplicity and ease of use. There is no need to input any numerical data, as all judgements are made visually.

The BBC Micro is the finest drawing machine in its price range. Find out what it can do.

The A.B. Designs Drawing Programme costs only £35 for the model B (over 70 functions) and £25 for the model A. When ordering include 50p for p & p. Please send telephone no. with all correspondence. For further information send S.A.E & phone no. to A.B. Designs, 81 Sutton Common Road, Sutton, Surrey.

## BBC MICRO

● scientific & educational applications ●

COMPLETE HARDWARE & SOFTWARE PACKAGES FOR MODEL B BBC MICROCOMPUTER SYSTEM

Professional Joystick 35.50

Environmental Monitoring Packages  
-Temperature, Illumination, Humidity etc. 18.00

100 year Clock - Calendar Unit 35.50

ALL SOFTWARE PROVIDED ON CASSETTE

manuale only available at 75p each  
refundable against package purchase

ALL PRICES INCLUDE P+P and VAT

for details of these and other products  
please send s.a.e. to:-

Chris Hall Software Engineering

Department B  
47 Bush Lane  
Freckleton  
PRESTON PR4 1SB

## BBC MICRO

Cost-effective Instrumentation for Home or School

### r q FORTH BBC FORTH TOOLKIT

"r q FORTH" runs on 16K or 32K BBC micros and costs £15. It:  
\* follows the FORTH-79 STANDARD and has fig-FORTH facilities;  
\* provides 260 FORTH words;  
\* is infinitely extensible;  
\* has a full-screen editor;  
\* allows full use of the M.O.S.;  
\* permits use of all graphic modes, even 0-2 (just!);  
\* provides recursion easily;  
\* runs faster than BBC BASIC;  
\* needs no added hardware;  
\* includes a 70 page technical manual and a summary card;  
\* has hundreds of users...

Level 9 Computing are pleased to announce a new toolkit for "r q FORTH" on 32K BBC micros. It costs only £10 and adds the following facilities to FORTH:  
\* a 6502 assembler, providing machine-code within FORTH;  
\* turtle graphics, giving you easy-to-use colour graphics;  
\* decompiler routines, allowing the versatile examination of your compiled FORTH programs;  
\* the full double-number set;  
\* an example FORTH program and demonstrations of graphics;  
\* other useful routines.

### nascom

Extension Basic . £15/£30 ROM  
Adds 30 new keywords to BASIC  
Compression Assembler 2 . £12  
Small source + high speed

Asteroids . . . . . m/c,g £7.90  
Galaxy Invaders . m/c,g £5.90  
Missile Defence . m/c,g £7.90  
Super Gulp . . . . . eb,g £4.90  
5-games cassette . misc £5.90  
(FULL RANGE IN CATALOGUE)

### adventures Spectrum BBC nascom

- 1) COLOSSAL ADVENTURE: The classic mainframe game "Adventure" with all the original treasures & creatures + 70 extra rooms.
- 2) ADVENTURE QUEST: Through forest, desert, mountains, caves, water, fire, moorland and swamp on an epic quest vs Tyranny.
- 3) DUNGEON ADVENTURE: The vast dungeons of the Demon Lord have survived His fall. Can you get to their treasures first?

Every Level 9 adventure has over 200 individually described locations and is packed with puzzles - a game can easily take months to complete. Only sophisticated compression techniques can squeeze so much in! Each game needs 32K and costs £9.90

ALL PRICES INCLUDE P&P AND VAT - THERE ARE NO EXTRAS. Please send order or SAE for catalogue, describing your micro, to:

### LEVEL 9 COMPUTING

Dept A, 229 Hughenden Road, High Wycombe, Bucks. HP13 5PG



## IF YOU WANT:

- \* The Latest News on the BBC Micro
- \* Top Quality Programs
- \* Useful Hints and Tips
- \* Honest Reviews
- \* Independent Opinions
- \* Local User Group Information
- \* Members Special Offers

## THEN YOU NEED:



The Newsletter of the Independent National BBC Microcomputer User Group

### MEMBERSHIP:

£12 for 1 year (£15 overseas) or send £1 and an A4 size SAE for a sample copy

**WRITE TO:** LASERBUG, 10 Dawley Ride, Colnbrook, Slough, Berks., SL3 0QH.

**MEMBERS IN 14 COUNTRIES WORLDWIDE**

# AMBER 2400



\*\*\*\*\*  
**AMBER 2400**  
MATRIX PRINTER  
\*\*\*\*\*

USED WITH MANY COMPUTERS  
INCLUDING BBC, UK101, ATOM,  
DRAGON, NEUBRAIN, ATARI,  
TRS-80, VIC-20 AND MZ-80K

LOW RUNNING COSTS USING  
PLAIN PAPER.  
24 COLUMNS WIDE.  
GRAPHICS CAPABILITY.  
SERIAL & PARALLEL INPUTS

**AMBER CONTROLS LIMITED**  
Central Way  
Walworth Industrial Est.  
Andover  
Hampshire SP10 5AL

### ORDER FORM

Please send me  Printer with parallel lead for:  
BBC  Acorn Atom  Dragon  @ £101.15 inc. VAT (+£2.95 p+p)  
I enclose cheque/money order (delete where necessary)  
made payable to AMBER CONTROLS LTD. for £ \_\_\_\_\_  
OR debit my Access/American Express/Diners Club Card  
(delete where necessary)                  
(allow 28 days for delivery)

Please use BLOCK CAPITALS

Name: \_\_\_\_\_

Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Postcode: \_\_\_\_\_

Signature: \_\_\_\_\_

Post to: **AMBER CONTROLS LTD., DEPT. JG2, CENTRAL WAY, ANDOVER, HAMPSHIRE. Telephone (0264) 54524**

# PRINTERS FOR BEGINNERS.....

## George Hill introduces you to the ins and outs of 'hard' copy. He starts off with a description of the types available.

After buying your computer and playing pre-packaged games for a few weeks, the need for a printer will gradually grow. Money spent in acquiring a printer is well spent, and you ought to start saving up now if you don't already own one.

Printers are vital to develop good programming technique, and cut down the length of time spent staring at a flickering television screen. If you copy programs from magazines you will inevitably make typing errors. A printout can be laid side by side with the original, and you can check it much more readily.

Also, as your own programming develops you are much more likely to write legible and well-structured programs if you can construct them with a printout available at each stage. Relationships between the parts are much clearer and the need for sections and explanatory REMs is more obvious on the printed page.

Finally, you can refer to a previous program while typing in a new one, without having to perform any complex manoeuvres.

Apart from program listings, there are also the advantages of having printouts of the results of your programs. Once you own a printer you will design your programs to use it automatically at appropriate moments, and sequences like:

```
PRINT "Results on 1) VDU only,
2) Printer and VDU?"
INPUT "Type 1 or 2" N
IF N=2 THEN PROCPRINTERON
```

will start to appear in your programs. With some printers you can also copy the graphics screen.

You may later wish to invest in or write some form of word-processing system. Word processing is the greatest development since the typewriter and to take advantage of its wonderful flexibility and capabilities, a printer, and preferably a good one, is an absolute necessity.

Now we know the advantages, let's look at the types of printer

which home users, small businesses, or educational establishments could reasonably afford. Teletype machines will not be considered, nor line- or page-printers used in conjunction with mainframe computers. They are far too large and expensive, and their only advantage is enormous speed.

The computer has a limited control over the appearance of the characters printed. Characters are letters, numbers and punctuation marks making up a 'character set'. The computer merely generates a series of ASCII numbers which it sends along the wire(s) to the printer. The printer decodes the numbers, and prints its own version of the character. Thus a change of mode from 2 to 0 on the BBC computer will change the appearance of the characters on the screen completely, but will not affect the printed ones at all. The type of character printed is generated from a source in the printer known as its 'character font'. The font varies, but is usually a pretty permanent feature of the printer, and the appearance of the characters is only subject to minor variation during a run.

There are five types of printer available within our parameters.

The basic difference is in the mechanism by which the data is transferred to the paper. They are: daisy-wheel; dot-matrix; electro-sensitive; ink-jet; graph-plotter.

The simplest to understand, and the one producing the highest quality output (but no graphics), is the daisy-wheel printer. The paper is fed, as in a typewriter, across a rubber roller. The character font is a plastic wheel with spokes (figure 1) and the characters are embossed on the ends of the spokes. An electro-magnetic hammer strikes the character head which strikes the ribbon, transferring its images to the paper. The daisy-wheel is rotated until the correct character is in front of the hammer, the hammer is fired, and the whole printing mechanism moves across the paper, printing one character at a time. The speed and sophistication of this process varies considerably with price!

The second type, the dot-matrix printer, is probably the type most likely to recommend itself to the home user. The printhead consists of a series of very fine, strong wires, which are fired individually by solenoids (figure 2). The wires print through a ribbon and the paper is fed over a roller as in the typewriter. The printhead moves across the paper and can print a band of dots.

Typically an 80 character line would have more than 400 dots per

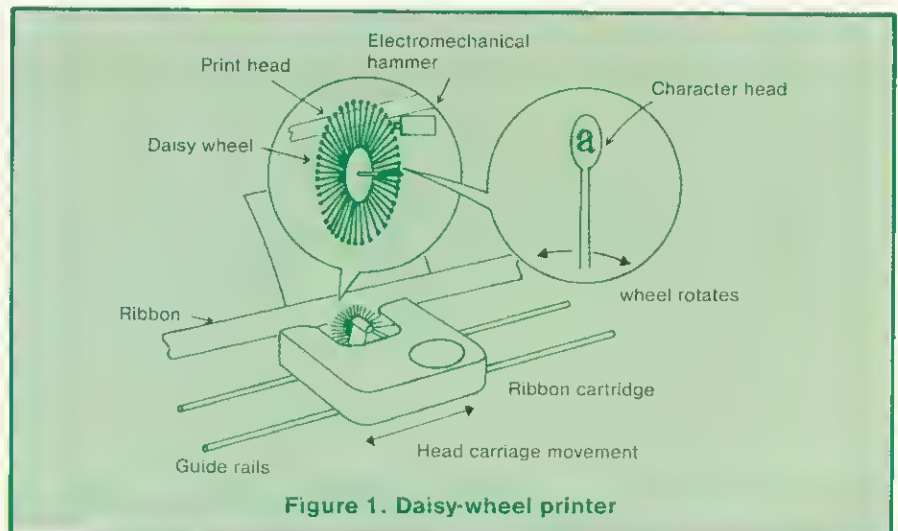


Figure 1. Daisy-wheel printer



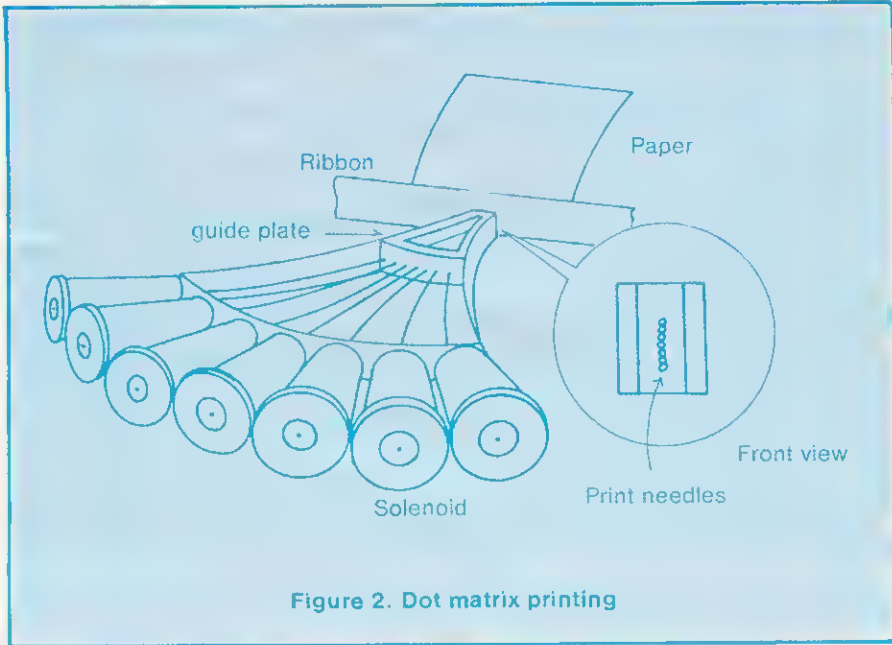


Figure 2. Dot matrix printing

line, and the band would be six to nine dots high. Thus each character is printed on a matrix (figure 3). The character font is in ROM in the printer (ie it is stored in a chip on the printer's circuit board). If an 'A' is sent to the printer the appropriate dot pattern is extracted from the ROM, and the wires are fired in the correct order as the printhead scans the paper.

The electro-sensitive system uses special paper which is a sandwich of paper, ink and aluminium foil (figure 4). Printing is carried out by wires in contact with the foil. When the wire is raised instantaneously to a high voltage, a current flows, melting the foil and exposing the ink underneath, which appears as a black dot on a silvery background. The character font is again in ROM.

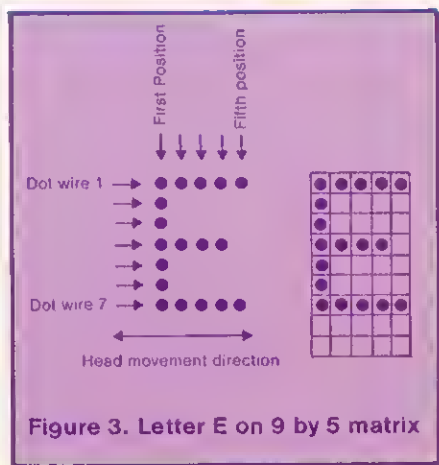


Figure 3. Letter E on 9 by 5 matrix

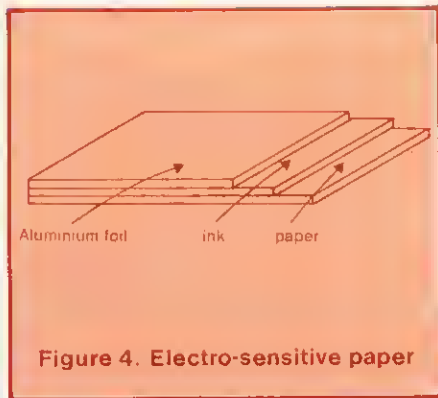


Figure 4. Electro-sensitive paper

The latest printers in our price-range are the ink-jet and graph-plotter types. The ink-jet principle operation is illustrated in figure 5. A jet of electrically charged ink droplets is fired at the paper, and deflected by electric fields in much the same way as the electron beam in a television set. The character font is again in ROM, but controls the direction of the deflections.

The graph-plotter type uses fibre tipped pens and draws its image by programmed movements.

Until more is known of the ink-jet and graph-plotter types, I shall not be able to give accurate comparisons, so for the present I shall not consider them. The only electro-sensitive I know of is the Sinclair. An article appeared in the November issue on interfacing it to the Atom, but the problems make it a non-starter for beginners.

A list of points to consider when choosing a printer follows. At the cheaper end of the market one desirable feature is traded off against another.

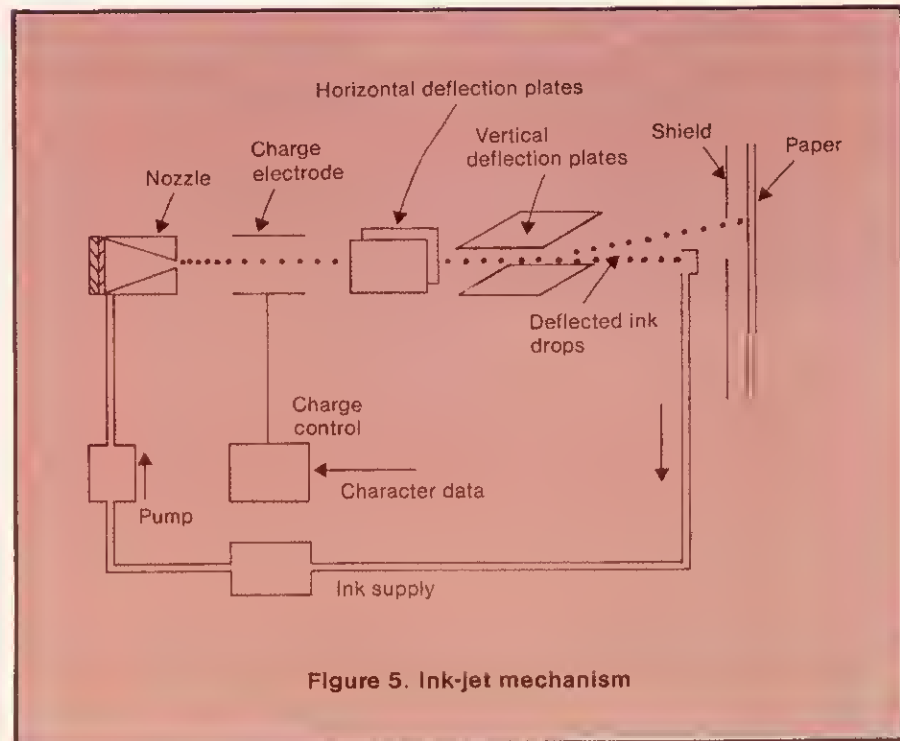


Figure 5. Ink-jet mechanism


**Paper width.** Some cheaper printers will only operate on their own size of paper (normally in rolls). Usually this is very narrow, resulting in long thin listings which are not easy to read. In the middle price range, paper width is up to A4 size (about 8.5 inches wide). Only in the larger, more expensive machines can full width computer paper be used. This is unlikely to be a disadvantage to the home user, but

# Cumana drives BBC Micro best!



**CUMANA DRIVES +  
OWN POWER SUPPLY  
= BIG PLUS FOR  
BBC MICRO USERS  
... JUST FOR  
STARTERS**

**... PLUS NO HASSLE  
12 MONTH WARRANTY**

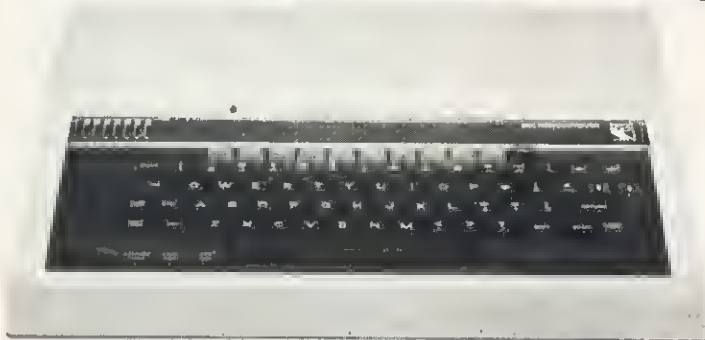

The 'ice on the cake' is that, because the Cumana Drive has its own power supply, it can be used with many other Micros when connected via the appropriate cable. Cumana supply a Drive connecting cable which has a standard 34 way edge connector plus 34 way BBC connector in the same cable length. This allows the Cumana Drive to be connected to numerous makes of micro without the need to change connecting cable. And the Japanese manufactured disk drives are quiet and utterly dependable.

- |              |   |             |
|--------------|---|-------------|
| <b>CS50A</b> | Single sided 40 track TEAC drive in a cabinet with own power supply 100K    | <b>£199</b> |
| <b>CD50A</b> | 2 single sided 40 track TEAC drives in a cabinet with own power supply 200K | <b>£369</b> |
| <b>CS50E</b> | Single sided 80 Track TEAC Drive with cabinet and own power supply 200K     | <b>£265</b> |
| <b>CD50E</b> | 2 single sided 80 Track TEAC Drives in cabinet with own power supply 400K   | <b>£495</b> |
| <b>CS50F</b> | Double sided 80 Track TEAC Drive with cabinet and own power supply 400K     | <b>£345</b> |
| <b>CD50F</b> | 2 double sided 80 Track TEAC Drives with cabinet and own power supply 800K  | <b>£619</b> |
|              | 2 drive Cable for BBC Micro   | <b>£15</b>  |
|              | 2 drive Cable for BBC Micro plus TRS80, Video, Genie etc.                   | <b>£18</b>  |

**UPGRADE KITS**

**A → B      £90**

## CUMANA LTD

Unit 1, The Pines Trading Estate, Broad Street,  
GUILDFORD, Surrey. GU3 3BH. Tel: (0483) 503121.  
Telex: 859380 CUMANA.

Please add VAT to all prices

**DEALER & EDUCATIONAL ENQUIRIES WELCOME --  
GENEROUS DISCOUNTS AVAILABLE**





business users might need the wider paper facility.

**Paper-feed mechanism.** This can be by two methods. First is the traditional typewriter mechanism, where the paper is squeezed between two rollers, one of which is rotated by a motor. This is the friction-feed mechanism. Second is by a tractor-feed mechanism, where the paper has holes down its edges, and is fed over motor-driven wheels which have teeth which correspond to the holes (figure 6). The holes are often in perforated strips which can be torn off after printing is complete. This mechanism gives more accurate control, and is preferable for graphics.

Paper for friction-feed normally comes in rolls and often needs a special roll-holder, which is not always supplied as standard. Tractor-feed paper comes in packs of perforated sheets, folded like a fan, hence fan-fold paper. Any type of printer might have either mechanism, so you need to be specific in your enquiries. It is desirable to be able to use single sheets of ordinary paper. This will only be possible in a printer with the friction-feed option and you will have to feed the sheets in by hand, unless you have a very expensive special attachment – beware of paper end detectors which switch off the printer in mid-page.

**Printing speed.** This is often quoted in advertisements in c/s (characters per second), and must not be confused with baud rate, which is the rate at which electrical signals can be transferred to the printer from the computer. The latter will be discussed in the next article in this series. Printing speeds vary widely from 12 c/s to 300 c/s. Beware of quotations of lines per second unless you are sure of the characters per line. For long programs and lists you will find a printing speed of less than 40 c/s a disadvantage.

**Printing styles.** Major changes may be made relatively easily on a daisy-wheel printer by changing the wheel. Thus italics, joined script, and greek alphabets may be available, but you cannot change the wheel in the middle of a run.

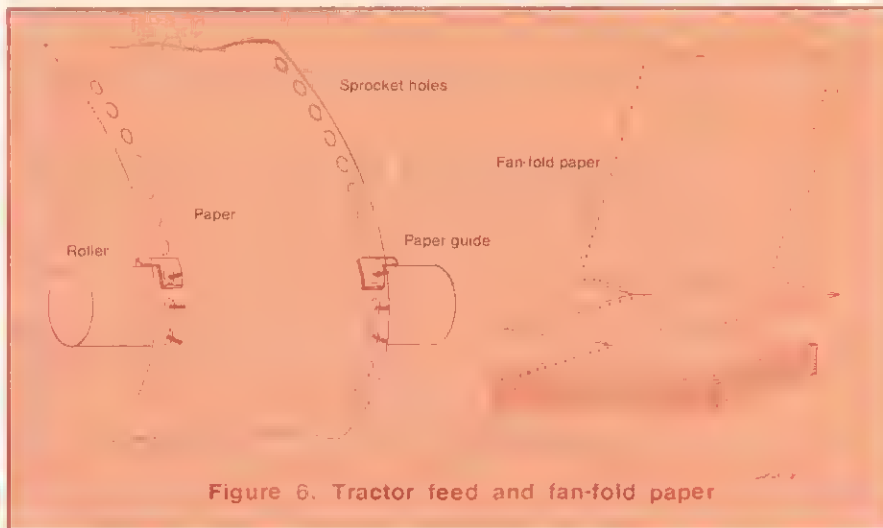


Figure 6. Tractor feed and fan-fold paper

So, unless the characters you want are all on the same wheel, you won't be able to use them in the same printout.

Dot matrix printers normally have only a single basic appearance for each character in the font, but a variety of printing methods produces a wide apparent variation. For example, the letter 'A' is always the same dot pattern, but the dots may be printed closer together, doubled up, further apart, producing different appearances (figure 7). Some of these features are under software control (ie you can change them by sending the appropriate control characters or escape sequences to the printer from the keyboard, or from within a program). Some need changes in switch settings or link placements within the printer. 'Control characters' are those with low ASCII values, generated by using the control key, which subtracts 64 from the ASCII value of any key pressed simultaneously (eg CTRL A sends 65-64, ie 1). 'Escape sequences' are generated by sending ESCape (ASCII 27) followed by a variety of letters or numbers. Each printer has its own function assigned to each, and there is little agreement between manufacturers.


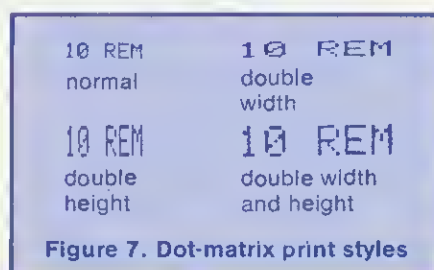


Figure 7. Dot-matrix print styles

**Graphics capability.** There are two forms of graphics printing available. The first is the 'chunky graphics' character set, based on a three by two matrix, and controlled typically by ASCII values 128 to 192.

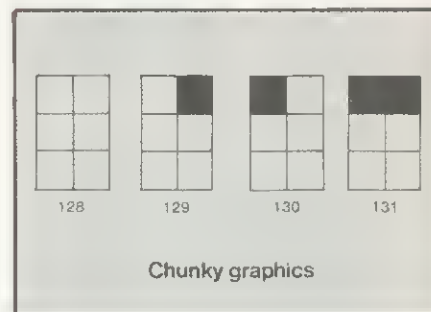

Manufacturers tend to refer to this as 'full graphics capability', but it requires some mathematical ability, good programming and much experimentation to use, and even then it has disadvantages.

The second is never available on daisy-wheel printers. It involves the ability to control each individual dot wire in the printhead, and hence produce any dot pattern under the control of the programmer. Here the number of dots per line and the degree of control are critical to performance, and the ability to produce a 16 colour dump with different patterns for each colour would require a minimum of 480 dots per line, and 640 or 960 would be more desirable. Satisfactory, though much more limited, pictures can be printed with as few as 256 dots per line, but any fewer than that involves splitting the picture up and printing it in parts, at least for the BBC computer.

**Line spacing and wraparound.**

Linefeeds can be tricky things on printers. First you may be able to vary the amount of space between lines, and indeed this may be crucial in graphics printing. This ability may be under software control, may need changes in internal switching, or there may be no control possible. Second, the printer may interpret a carriage return character (ASCII 13) either literally (ie it returns the printhead but continues printing on the same line) or it may perform 'auto-linefeed'. That means the paper is advanced every time a return is encountered. Again control may be under software, or switched, or not available. Third, if a line is overlength, the printer may interpret a carriage return as an instruction to do one of three things: truncate the line at the maximum width set, ignoring all characters above the pre-set linelength; overprint the excess characters on top of the first characters on the line; perform a linefeed and print the excess characters on the next line.

Although you may think the last is the only sensible option, there are occasions when it is desirable to have this feature under your control. It is known as wraparound.

**Interfacing.** This will be dealt with as a separate topic in a future article. The two forms are called 'serial' and 'parallel', and the BBC micro can cope with either. Some printers can be switched from one form to the other, but this usually involves setting switches located in the bowels of the machine.

**Reliability.** In my experience modern printers are reliable, and are unlikely to give trouble in the course of normal moderate use. Like other delicate mechanisms they do not like major abuse.

**Noise.** If you are noise-sensitive, as I am, the clatter and whirr of noisy parts can be annoying. Daisy-wheels are generally more noisy than dot-matrix, and cheap printers are more noisy than expensive ones.

What should influence you in your choice of printer, if it is to be between daisy-wheel and dot-matrix? Unless the *primary* purpose of your printer is the production of top quality printed matter in the form of letters and circulars, or you need to produce multiple carbon copies, or you are really buying a typewriter, and its use as a printer is a bonus, you should probably opt for the dot-matrix printer. The quality produced by middle priced dot-matrix printers will satisfy all but the most fussy (particularly if you fit a new ribbon regularly). The added ability to reproduce graphics is probably the deciding factor.

How much should you be prepared to pay? Prices vary enormously in the range £60 to £2000, and on the whole you get what you pay for. It is however unlikely that the home user should pay more than £400.

Some of the latest printers will be reviewed in these pages to help you choose. But remember, you're buying, so take a good look and, if possible, use it first.

**MICROAGE ELECTRONICS**  
**BIG value in small printers**



**The Incredible Seikoshia AP80**

The AP80 is probably the world's **LOWEST COST**, compact 80-column graphic dot-matrix printer available.

It can produce single and double width characters and has the ability to produce any pattern through its dot-matrix capability.

The AP80's robust construction and its unique "unihammer" make it an extremely cost effective and efficient printer.

**Its features include**


- 80 Cols 30 cps ● Dot Matrix Unihammer action ● 96 ASCII standard characters ● Up to 8" paper width ● Upper and lower case ● Double width printing ● Standard interface: Centronics

**The Amazing Seikoshia AP100**

Big brother to the AP80 the AP100 is a wider more sophisticated version of the AP80 with a full graphics capability and the ability to take standard width computer stationery, the AP100 is an ideal choice for anyone with a microcomputer.

**Its features include:**

- 80 cols 30 cps ● Dot Matrix Unihammer action ● 116 ASCII standard characters ● Full graphics capability ● Up to 10" paper width ● Upper and lower case ● Double width printing ● Centronics interface: Only £215.

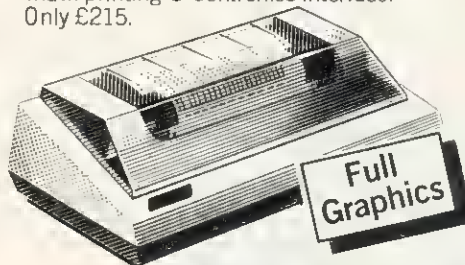

Official Orders Accepted

At Microage you can now get the very best value in microcomputer printers. We've selected only the best printers available so you can choose confidently, knowing you're getting the best value for money.

Free Cable + paper with printers

**Accessories**

- Seikoshia GP-80 Ink Ribbon £4.75 (75p p+p)
- Seikoshia GP-100 Ink Ribbon £5.75 (75p p+p)
- Dust and sound Cover £3.95 (75p p+p)
- Friction feeds for 80/100 £25.00 (£1.50 p+p)

Please Rush me details of all Printers.

Name \_\_\_\_\_

Address \_\_\_\_\_

The computer I shall be using it with is: \_\_\_\_\_

AU3

**MICROAGE ELECTRONICS**

135 HALE LANE EDGWARE MIDDLESEX HA8 9QP TEL: 01-959 7119 TELEX 881 3241  
Open Mon - Sat 9.15am - 6.00pm. Thurs 9.15am - 1.00pm.

**DEALER ENQUIRIES WELCOME**

**CALL 01-959 7119 FOR TRADE PRICES**



# Midwich

COMPUTER COMPANY LIMITED

**1st choice for microcomputer components**



### QUALITY & VALUE

Every product in our catalogue is carefully selected as being of the highest quality and is backed by our 12 month "no-quibble" guarantee. Most of our range is purchased from leading manufacturers such as Texas Instruments, Motorola, National Semiconductor, Intel etc. Our bulk buying power and low overheads ensure that these products are sold at the lowest possible, often unbeatable prices.



### DELIVERY & SERVICE

We guarantee to despatch by 1st class post or Securicor every order received by us up to 3.30pm that day, for goods available from stock. That means that, due to our commitment to massive in depth stocks, better than 95% of our product range is available to you within 24 hours. Every product we sell is supported by our technical enquiries department and datasheets are available on most products.

## BBC MICROCOMPUTERS AND ACCESSORIES

### BBC COMPUTERS

Model B	£346.95
Model B + Disc Interface	£441.95

### BBC MICRO DISC DRIVES

BBC 31 Single 100K Drive	
Expandable to 2 x 100K	£229.00
BBC 32 Dual 100K Drives	£340.00
BBC 33 100K Upgrade for BBC 31	£122.00
BBC 34 Dual 400K Drives	£649.00

All disc drives (except BBC 33) complete with Manual, Utilities Disc, and Connecting Cables.

### BBC UPGRADE KITS

BBCA2B Complete A to B Upgrade	£44.75
BBC 1 16K Memory	£18.00
BBC 2 Printer/User 1/0KK	£ 7.50
BBC 3 Disc Interface Kit	£95.00
BBC 4 Analogue Input Kit	£ 6.70
BBC 5 Serial 1/0 Rab Kit	£ 7.30
BBC 6 Bus. Expansion Kit	£ 6.45

All kits are supplied with full fitting instructions.

*Fitting Service available*

### BBC CONNECTORS

BBC 21 Printer Cable and Amphenol Plug (not assembled)	£13.00
BBC 22 User Port Connector and Cable 36"	£ 2.46
BBC 23 Cassette Lead	£ 3.50
BBC 24 7 Pin Din Plug	£ 0.60
BBC 25 6 Pin Din Plug	£ 0.60
BBC 26 5 Pin Din Plug	£ 0.60

### BBC 35 Disc 1/0 Cable 34W IDC to 2 x 34 way Card Edge

BBC 35	£12.00
BBC 36 Disc Power Cable	£ 6.00
BBC 44 Analogue Input Plug & Lever	£ 2.25
BBC 66 1 M Bus Connector + 36" Cable	£ 3.50

### BBC ACCESSORIES

BBC 45 Joysticks (per pair)	£11.30
BBC 67 Eprom Programmer (assembled)	£57.95

### ACORN SOFTWARE FOR THE BBC

SBE03 Business Games	£ 8.65
SBE04 Tree of Knowledge	£ 8.65
SBE02 Peeko Computer Inc Manual	£ 6.65
SBE01 Algebrail Manipulation PK	£ 8.65
SBX01 Creative Graphics Cassette	£ 8.65
SBX02 Graphs & Charts Cassette	£ 8.65
SBB01 Desk Diary Inc Manual	£ 8.65
SBL02 Lisp Cassette	£14.65
SBL01 Forth Cassette	£14.65
SBG01 Philosophers Quest	£ 8.65
SBG07 Sphinx Adventure	£ 8.65
SBG03 Monsters	£ 8.65
SBG04 Snapper	£ 8.65
SBG15 Planetoid	£ 8.65
SBG06 Arcade Action	£10.35
SBG05 Rocket Raid	£ 8.65
SBG13 Meteors	£ 8.65
SBG14 Arcadians	£ 8.65
SBG10 Chess	£ 8.65

*New Acorn Electron Ring for price and delivery*

### ACORNSOFT BOOKS FOR THE BBC MICRO

SBD01 Creative Graphics	£ 7.50
SBD02 Graphs - Charts	£ 7.50
SBD04 Lisp	£ 7.50
SBD03 Forth	£ 7.50

\* Please ring for current delivery on Acornsoft products before ordering.

*Fast ex-stock delivery on most items*

### BBC MICRO COMPONENTS

4516 100NS	£ 2.25
6522	£ 3.19
74LS244	£ 0.59
74LS245	£ 0.69
74LS163	£ 0.34
DS3691N	£ 4.50
DSBLS120N	£ 4.50
UPD7002	£ 4.50
8271	£36.00
20 Way Header	£ 1.46
26 Way Header	£ 1.76
34 Way Header	£ 2.06
40 Way Header	£ 2.32
15 Way D Skt	£ 2.15
6 Way Din Skt	£ 0.90
5 Way Din Skt	£ 0.90

### BBC SOFTWARE IN ROM.

Wordprocessor "View"	£52.00
1.0 MOS	£36.00

*Delivery Charges Computers/Disc Drives £5.00 Components/Software £0.50 Books/Joysticks £1.00*

THE ABOVE LIST SHOWS JUST A FEW OF THE ITEMS IN STOCK. PLEASE TELEPHONE YOUR REQUIREMENTS - OR BETTER STILL SEND FOR OUR FREE CATALOGUE



Carriage Orders up to £199 are sent by 1st class post, and £200 + by Securicor. 0-£100 0.50 £100-£199 1.25 £200 + 5.00 by Securicor. Prices quoted (+ carriage charges) are exclusive of VAT and are subject to change without notice. Quantity Discounts are available on many products, please ring for details. Official Orders are welcome from Education Establishments, Government Bodies and Public Companies. Credit Accounts are available to others subject to status. Payment is due strictly nett by the 15th of the month. Credit Cards are accepted (Access and Visa) for telephone and postal order and NO SURCHARGE is made. Out of stock items will follow automatically, at our discretion or a refund will be given if requested.

**MIDWICH COMPUTER COMPANY LIMITED**  
 PICKINGHALL HOUSE, PICKINGHALL, SUFFOLK IP22 1HH  
 TELEPHONE (0379) DISS 898751

Please complete this coupon for a copy of our FREE catalogue.

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

\_\_\_\_\_

TEL NO \_\_\_\_\_





BACK ISSUES of *Acorn User* are available at a cost of £1.25 each including postage and packing. Please make cheques or postal orders payable to Addison-Wesley and send with your order to BKT (address below). If you have any queries on subscriptions or back issues, contact BKT. The company will also accept credit card payment for subscriptions by

telephone. Their number is: (0732) 351216.

We are running short of some of the early issues of *Acorn User* as a result of heavy demand, but we can offer a photocopy service for articles which appeared in these early issues. The cost per page is 16p. Write to: Acorn User Reprints, Addison-Wesley Publishing, 53 Bedford Square, London WC1B 3DZ.

To ensure regular delivery of *Acorn User*, send this form (or copy) to: Acorn user, Freepost, B.K.T. (Subscription Services) Ltd, Douglas Road, Tonbridge, Kent TN9 2TS, England.

## SUBSCRIPTIONS

# Acorn User

### Direct Subscriptions

Please open one year's subscription to *Acorn User*. Annual subscription rates (please tick appropriate box):

- UK £15     Europe £18     Middle East £20
- The Americas & Africa £22     All other countries £24

Name.....

Position.....

School/College/Company.....

Department.....

Address.....

.....

..... Post Code .....

AU8

### Preferred Method of Payment

Please complete the appropriate section and delete where necessary (\*).

#### UK Subscribers

I enclose my cheque/postal order\* for £..... payable to Addison-Wesley Publishers Limited.

#### Overseas Subscribers

I enclose my cheque/international money order/sterling bank draft\* for £..... payable to Addison-Wesley Publishers Limited.

#### Credit Card Payment

Please debit my Access/American Express/Barclaycard/Diners Club/MasterCard/Visa\*.

Account No.

Signed..... Date.....

#### Important Note

If you are paying by credit card, the address you give for delivery of *Acorn User* must be the same as the address to which your credit card account is sent.


Send this form, with your remittance, to the address above.





# Software for the BBC Micro

from **COMPUTER CONCEPTS**  
*Wordwise*

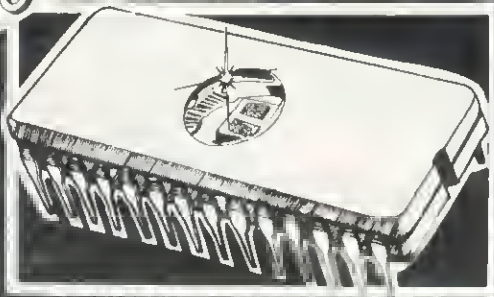

For the BBC microcomputer Model B

The word processor for the BBC machine. This ROM based word processor has received superb reviews. Supplied with full spiral bound manual and cassette containing an example document and free typing tutor program. Now available from stock. Quantity Discounts.  
£39.00 + £1.50 p&p + VAT.

from **COMPUTER CONCEPTS**  
*Forthcoming*  
**ROMS**

## Beeb-calc

A ROM based spread sheet program.

## Debugging Program

2 machine code debugging programs — one in ROM, one on tape. Essential for the machine code programmer. An ideal complement to the assembler built into the BBC machine.

## Disk Doctor

A ROM containing useful disk utility programs. Enables the recovery of any data off the disk including deleted files etc.



from **COMPUTER CONCEPTS**  
*Games*  
FOR THE MODEL B.

**NEW!**

**SWARM**  
Alien against you, mode 2 graphics. Very fast. £7.80 + VAT.

## Spacehawks



Mode 2 graphics, a machine code game much like the 'Galaxians' found in the arcades — very fast and also works with joysticks

£7.80 +VAT


## Asteroid belt



High speed and high resolution graphics are combined in this game to produce an exciting game — almost identical to the original arcade version.

£7.80 +VAT

## Chess

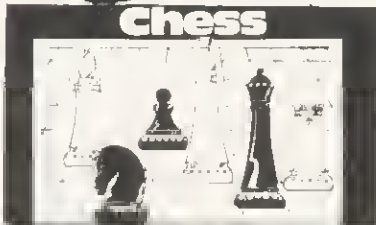

High resolution graphics with thousands of skill levels — more features than any other chess game.

£10.00 + VAT.

## Snake



Another game that has received very favourable reviews — Fast and addictive.

£7.80 +VAT

## We give very generous trade discounts

Cash or royalties — we pay the best rates around for any good BBC micro software

Our tapes are guaranteed to work on all Operating Systems.

**COMPUTER CONCEPTS**



**Dept AC6**  
**16 Wayside, Chipperfield,**  
**Herts, WD4 9JJ. tel (09277) 69727**



Letters  
Acorn User  
53 Bedford Square  
London WC1B 3DZ

## Back issues, hardware and user groups

Sir, Last September I purchased a BBC model B and have thoroughly enjoyed the machine. Sometime before I purchased my machine I read an article in which it was stated that owners of the BBC micro would receive two complimentary copies of Acorn User. However, I have not received any complimentary copies, so I assume this practice has now been stopped, no doubt for sound reasons.

I was pleased therefore to see your first nationally circulated November issue and immediately purchased it. My compliments on the presentation and contents of the magazine. This has been reinforced by your December and January issues and I have now placed a regular order with my local newsagent. There is however one problem; I do not possess copies of your first three issues. Would it be possible to obtain these?

There are several other queries I would like to raise with you which you may consider worth looking into.

First, my computer functioned perfectly (excluding ROM bugs) for several months. However, recently I have experienced problems with flashing across the TV screen and picture distortions. On investigation I found the lead to the TV had a fault – the earthing wire to the input connector on the lead was not soldered, merely wrapped around. After soldering this on the problem disappeared.

What about articles on hardware peripherals? I would like to make a combined joystick/numeric pad which would give greater flexibility in program applications than a simple joystick/fire button. Take for instance Planetoids, this requires seven inputs. A joystick/numeric pad would accommodate this easily.

On the same lines, I was impressed with your article on interfacing discs to the Beeb, particularly those used for the TRS80. What about the Aculab floppy tape – is there any chance

of interfacing this? They can be obtained for £125 for a drive and £50 for slaves.

I note facilities are advertised for teachers through the auspices of your magazine. Do you know if individuals outside the teaching profession can obtain these? They would be useful to our small local user group at ICI in Huddersfield.

B.D.Gott  
Huddersfield

**The first two issues of Acorn User (July/August and September) were mailed out free. Unfortunately, these have now been distributed, and the dwindling supplies have to be reserved for subscribers, unless you are prepared to pay for them (see back issues and subscriptions information, page 73).**

**The point you make about duff soldering is an important one – many problems with TVs, and cassettes, can be put down to bad connections.**

**Your idea about the joystick/numeric pad has been noted, and we hope to carry an article on this in the future. Joe Telford's article on the lightpen may be of interest – and George Hill on printers.**

**It would be nice to cover every disc under the sun, but space doesn't allow this. The article on discs you mention in January's issue should, however give pointers to using any brand of disc – and your dealer may be able to help.**

**The facilities which user groups negotiate depend on how hard you try. The teaching user groups rely on self-help and information exchange. Your local dealer may give you discounts and your bargaining power would undoubtedly increase if you teamed up with other user groups in ICI, or locally.**

**Many other aids for the teaching profession come from the MEP – a Government sponsored body. Their products may be put on sale – but remember that the software was originally written in individual schools. The MEP just tidies it up, collates it and distributes it.**

## A lost micro

Sir, In October 1982 I took delivery of a model B BBC micro which developed some problems. I sent the machine back to Wellingborough, omitting to insure it, and I have been told on the phone that they have no record that it arrived.

Could you please circulate the number of my micro (119843, and on the keyboard 11172) to make it more difficult to dispose of?

B. Ross  
West Sussex

Sadly, we have heard of several machines disappearing in the post. It would obviously be wise to take out some form of insurance with the Post Office when you send your micro off for repair.

## 'B' software on upgraded 'A'

Sir, Recently I sent off a coupon to Acornsoft and was pleased to receive a colourful brochure describing their programs for the BBC micro. My one problem is that the programs are described as either 'model B' or 'model A' compatible. As I possess a model A with the memory upgrade to 32k, I would be pleased if you could tell me which model B programs will run on such a machine.

Peter Waymont  
Essex

**You will be able to run all model B games on your micro so long as you have a 6522 VIA (versatile interface adaptor) chip. A few games do not require this chip, but you will have to ask your dealer which these are. The chip plugs into the IC69 socket on the board inside the computer. You can get these chips from dealers, who will fit them in a couple of minutes. The cost will be around £11 including VAT.**



## Error puzzle

Sir, Out of curiosity and not need, I wish to make a query about our BBC model B computer.

When we switch it on and immediately type OLD we get the error message 'Bad program'. Then, if we type RUN, 'Syntax error in line 255, Bad program' is returned. Type RUN once more and two lines of rubbish are shown. Typing RUN once again and either we are told: 'Mistake' or 'No room'. Or the top few lines of the display 'fizzle' up and off the screen - in both cases all keys except BREAK are disabled.

Until we decided to always type NEW before entering a new program, we got the error message 'No room' very quickly, almost as if our micro's chips are full of nonsense.

Is this normal?

Helga Zunde

**No, this is not normal! We feel that your micro has RAM problems - you can get these changed by your dealer.**

## Printer choice and EPROMs

Sir, I am considering buying a printer for my 32k model A. I have added a printer port and two chips - IC70 and IC69. Is there any more hardware to be added before a printer can be used? I have up to £200 to spend. Are there any printers that are recommended for the BBC?

I have been having problems loading files to and from cassette and I believe it is my OS 0.1 EPROM. Promises were made that this would be replaced free of charge - is this service now available?

Is it possible to squeeze about 6k more of variable storage above my 32k using either extra hardware or re-allocating memory?

Jonathan Brenchley  
Sussex

**To answer your first question, you now have everything needed to drive the printer. There are no printers recommended by Acorn for the Beeb in your price range - and for under £200 your choice will be limited. See George Hill's article (p67) for some**

advice. We also reviewed the £70 Amber printer last month. This printer can also be used with the Atom.

**Point two: yes, this service is now available and you should be able to change your EPROMs for a series one chip through your dealer.**

**It's not directly possible to squeeze out more memory. The second processor will allow more program and variable space but it's not possible without it due to the 64k memory limitation of the 6502 microprocessor.**

## 'Guide' errors

Sir, page 453 of the BBC User Guide contains an error. In the third line of the page, it is stated that OSFIND returns the channel number in the Y register. The channel number is actually returned in the accumulator, A. Assembler programmers will be interested to learn this.

Washington Jordan  
London

**Here are two other errors: Page 179, line 10120 should read:**

**MOVE X%,Y% not MOVE %X,Y%**

**and page 518 (index) the entry for PRtNT in hex should read ~ PRINT in hex 18,410.**

## Advice on screen photos

Sir, I wish to take transparencies of text from my TV screen. As you use such pictures, can you help me with any information?

Eric Jones  
Clwyd

**Most photos used in this magazine showing screen displays (see February issue page 57 'Rocket Raid') are taken from a monitor which provides a much sharper, steadier picture than a domestic television.**

**Our photographer offers this advice: mount the camera on a tripod; use a single lens reflex camera with a long focus lens (135mm is ideal). The room must be**

**dark with no screen reflections and obviously you don't use a flash. Frame the picture so only the screen is in view. Use 64ASA film for still displays, 200ASA for moving displays and shutter speed 1/25th second. The best aperture setting must be discovered, by trial and error - use your light meter to determine an initial setting and bracket each way.**

**This advice will produce the best pictures. For results which are quite acceptable, but not as professional, the most important points are a dark room and a steady camera.**

## Graphics program won't work

Sir,  
On running graphics program 2 (page 54 of the December issue) on my model B, despite scrupulous checking and re-checking I could get nothing other than the message: 'Not local at 10220.'

Who or what is at fault? I would welcome any suggestions.

Keith Leadbitter  
Hampshire

**We tried this procedure many different ways, and the only way to reproduce the error message you were getting occurred when the program executed the procedure without calling it.**

**All procedures should be put beyond the END statement of a program so they cannot be executed, unless called by name from within the program. For example, consider the following lines:**

```
100 DEF PROCprint
110 LOCAL N
120 PRINT "Hello"
130 ENDPROC
```

**If this is run it will produce the error message 'Not local at line 110', whereas the same procedure called in a program will execute with no errors. For example:**

```
10 PROCprint
20 END
100 DEF PROCprint
110 LOCAL N
120 PRINT "Hello"
130 ENDPROC
```

**We hope your program runs, as the teletext mode is such a nice one to use.**

# Salamander Software PRESENTS

## EDG GRAPHICS PACKAGE

Salamander Software has recently obtained sole U.K. marketing rights to a sophisticated graphics package for use with the BBC Model B microcomputer. The package was developed by a firm of consultants and design engineers to the oil and utility industries for in-house use, and has now been assembled in commercial form for applications in the home, business and schools.

The package consists of an advanced picture drawing system controlled entirely by normal keyboard input and using cassette tapes for software and picture storage, so that no additional hardware is required.

### THE MAIN SYSTEM FEATURES ARE:

- \* Picture drawing in mode 0, 1 or 2
- \* Actual and Logical colour changes at any time
- \* Drawing functions include lines, boxes, circles, arcs, text and shape repetition
- \* Drawing aids include grid, elastic band, save and home cursor (5 positions)
- \* Colour fill
- \* Text window showing X, Y cursor position, length, angle, colour menu and current colour
- \* Saving and loading of pictures using cassette tapes
- \* Multi file picture
- \* Flashing crosshairs cursor
- \* User instructions/prompts
- \* Spiral bound manual

PRICE £24.95 inc VAT

Available from:

Salamander Software  
27 Ditchling Rise  
Brighton  
East Sussex  
BN1 4QL

or ask at your local Acorn dealer  
Trade enquiries: Tel: B'ton (0273) 771942

Send stamped s.a.e. for full catalogue





# BBC Micro-Aid

**SOFTWARE**—Programs that are guaranteed to run! Save hours of work and worry with these utilities and practical programs on cassette.

<b>2 Cashbook B</b>	Double entry Cashbook with accounts.	<b>£ 4.95</b>	A/B
<b>4 Mailing B</b>	Database mailing system with 6 options including 2 sorts, labels, search and updating	<b>£ 4.95</b>	B
<b>5 Payroll</b>	Two part program to handle weekly wages for around 100 employees. Fully supported.	<b>£11.90</b>	B
<b>101 Cards</b>	Beat Bruce Forsyth at his own game.	<b>£ 2.95</b>	A/B
<b>102 Battle</b>	Fast moving simulation of Falklands innelield.	<b>£ 2.95</b>	B
<b>501 Banner</b>	Print out large text and graphic characters.	<b>£ 2.95</b>	A/B
<b>502 Distances</b>	Graphic maps of U.K., EUROPE and WORLD. Calculates distances between any two points on Earth.	<b>£ 2.95</b>	B
<b>503 Flags</b>	Full colour flags of the world. Educational.	<b>£ 2.95</b>	B
<b>504 Statpack</b>	Statistics offering over 15 options.	<b>£ 7.95</b>	B
<b>801 Searchbas</b>	PROC to search a BASIC program and alter it.	<b>£ 1.95</b>	A/B
<b>802 Procvr</b>	PROC to list all variables used in a program.	<b>£ 1.95</b>	A/B
<b>803 Proclush</b>	PROC to clean out memory including integers.	<b>£ 1.00</b>	A/B
<b>804 Proclrd</b>	A combination of 801, 802 and 803.	<b>£ 2.95</b>	A/B
<b>805 Datchr</b>	Design graphic characters, display and store.	<b>£ 2.95</b>	A/B
<b>806 Sortm/c</b>	Machine Code Bubble sort for up to 255 integers.	<b>£ 1.00</b>	A/B
<b>807 Sortbas</b>	A very fast BASIC sort. 1000 items in 42 secs.	<b>£ 1.00</b>	A/B
<b>808 Utility A</b>	A combination of 801-807. Super value.	<b>£ 4.95</b>	A/B

Coming shortly; **French Verbs & Trigonometry**

**Hardware** An aluminum stand to lit over the BBC Micro to support your VDU or T.V. Saves space on your desk and protects your micro from damage. Anodised super quality. **£ 17.50** Plus p/p £1.50

**Holidays** **Weekends in Paris** for computer enthusiasts by coach and including three star hotel. Have fun and make friends **£ 39.50**

**Easter at Falmouth in Cornwall** for a computer jamboree. Apartments for up to 6 people at a per apartment price of **£ 10.00** per day

July and August prices £110 and £120 per week. **Visit Silicon Valley in California** for two weeks, flying with Pan-Am. See San Francisco, Los Angeles and Vegas. **£699.00**

Apartments available on Costa Brava from **£39** per week.

Download our software from Prestel on Micronet 800  
Holiday Details on **Prestel \*80091722 #**

If you want further information before parting with your hard earned cash drop a line to:

**Micro-Aid (AU),**

25 Fore Street, Praze, Camborne, Cornwall TR14 0JX.  
Tel: 0209 831274

# BBC Micro-Aid

## NEW SOFTWARE FOR YOUR BBC MICRO

A full database program offering unlimited array power. As many columns as you like each with its own heading. Adjusted number of rows each with its own key field. Enter numbers or strings as required to fill the array. Alter, sort, search, list and evaluate data using cursor. Mathematical calculations on individual data, rows or columns. Enter your own equations or formulae and watch the results.

# Memo-Calc

Order as 505 MEMO-CALC Total price just **£7.95** inclusive.

(manual £2.00 extra)

## NEW FOR EMPLOYERS

An addition to our PAYROLL suite for MONTHLY staff.

**MONTHLY PAYROLL 3 £5.95**

For users of our PAYROLL 1 & PAYROLL 2 for Weekly staff just order PAYROLL 3 for the monthly pay calculations. Other purchasers will need PAYROLL1 (database) **£5.95**.


**Micro-Aid (AU)**

25 Fore Street, Praze, Camborne, Cornwall TR14 0JX  
Tel: 0209 831274


# ACORN PLUS

**FREE!**  
**NEW 100 PAGE**  
**CATALOGUE**  
**FREE!**

Control Universal stock Acorn, Rockwell, Cubit and fine peripherals. Send for our catalogue.

**ACORN STOCK**  Ring Control Universal on four telephone lines for technical advice and fast deliveries on all Acorn products - Eurocards, systems, Atoms, all software, networks components, connectors, spares - everything you need.

**MORE: STOCK**  Control Universal also stock Rockwell Computers, EPSON and TEC printers, BMC and MICROVITEC vdu displays, G.P.I. EPROM programmers and erasers, disks, stationery, memory and TTL chips.

**CUBIT**  The CUBIT range is made by Control Universal and includes single board computers with 4K RAM and VIA i/o chip for 6502, 6802 and 6809 processors; CU-MEM memory card for eight 24 or 28 pin memory chips, with on board battery back up for CMOS RAM; CUBIO 64/80 channel digital i/o card, CUBAN eight bit analogue interface with 16 analog inputs, one analog output and 20 digital i/o channels, CU-KEY ascii keyboard.

**'ATOM PLUS 17K RAM — £69**

**why 17k ?**

- to fill in the gap from hex 3C00 to 3FFF with 1K of static RAM, and provide 16k of dynamic RAM from 3000 to 7FFF. Uses 5v only devices, and fits in the standard Atom case.

Standard Eurocard size and bus connector.

**'CU-DRAM' 64K bytes DRAM — £129**

For all Acorn and Control Universal systems. Each block of 4k can be enabled or disabled to match the system. Carries also a 4k/8k 28 pin socket for ROM or EPROM, and can be software selected at board level to allow up to 16 boards in one system and hence a maximum of 1Mbyte of RAM.

Standard Eurocard size and bus connector.

**CONTROL UNIVERSAL LTD.**  
Unit 2, Andersons Court, Newnham Road, Cambridge  
(0223) 358757

**VISIT OUR**  
**NEW SHOWROOM**



# DEALER LIST

## Official Acorn Dealers

Acorn dealers stock and service the BBC micro, Atom Computer, Acorn systems and Acornsoft software. The Acorn dealer not only sells computers and peripherals but provides vital customer support. Most have recently attended technical seminars in Cambridge to ensure that they deal effectively with customers' enquiries. In addition, Acorn supply dealers with specific test and diagnostic equipment to speed fault finding.

### LONDON

- Direct Data Marketing Ltd SW1
- 01 834 501 6/5096
- Group 70 E18
- 01 505 7724
- Jessop Microelectronics Ltd E2
- 01 739 3232/729 1851
- Multi Data Services Ltd SW1
- 01 828 7457/9
- Off Records SW11
- 01 223 7730
- REW West End Video Centre WC2
- 01 240 3386/7
- Technomatic Ltd NW10
- 01 452 1500
- Technomatic Ltd W2
- 01 723 0233
- The Video Palace W6
- 01 937 8587

### AVON

- Datelnk Microcomputer Systems Bristol
- 0272 213427/8
- Microstyle Bath
- 0225 334659

### BEDFORDSHIRE

- Braceway Electronics Ltd Bedford
- 0234 213639

### BERKSHIRE

- Microstyle Berkshire
- 0935 41929
- Windair Computer Centre Windsor
- 07535 58077

### CAMBRIDGESHIRE

- Arden Personal Computers Peterborough
- 0733 47787
- Cambridge Computer Store Cambridge
- 0223 65334
- Comfil Universal Cambridge
- 0223 368757

### CHESHIRE

- Fairfax Instruments Ltd Wilmslow
- 0625 525694
- Mesple Computer Centre Mersple
- 061 449 9933
- Northern Computers Warrington
- 0928 35110

### CLEVELAND

- Customised Electronics Ltd Middlesbrough
- 0842 247727

### CORNWALL

- Brewer & Bunney Camborne
- 0209 712681
- Microlet Ltd Bodmin
- 0208 3171

### DERBYSHIRE

- Datron Micro Centre Derby
- 0332 380085

### DEVON

- A & D Computers Exeter
- 0392 55665
- Bits & Bytes Ilfracombe
- 0271 82601

### DEVON COMPUTERS

- Paignton 0803 526303
- A.D. Integrated Services Plymouth
- 0752 82616

### DORSET

- Landsowne Computer Centre Bournemouth
- 0202 20165

### ESSEX

- Akhil Instruments Hatfield
- 0279 412639
- Computers for All Romford
- 0708 60725
- Direct Data Marketing Ltd Brentwood
- 0277 229379/214168

### GLOUCESTERSHIRE

- Computer Shack 0242 584343
- Miletop Ltd Gloucester
- 0452 411010

### HAMPSHIRE

- Business Electronics Southampton
- 0703 738245
- Electroncorp Fareham
- 0329 230670
- Beingsloke Computer Centre Basingstoke
- 0256 522203
- R D S Electrical Portsmouth
- 0706 712478
- R M K Electronics Ltd New Milton
- 0425 616110

### HERTFORDSHIRE

- Compshop Ltd New Barnet
- 01 441 2322
- Computer Plus Welton
- 0923 33927
- Intelligent Artifacts Ltd Royston
- 0233 207689
- C-Tek Systems Ltd Stevenage
- 0438 65385

### HUMBERSIDE

- Computer Facilities Scunthorpe
- 0724 63167
- Holdeiness Computer Services Hull
- 0364 30225
- Vixon Computer Systems Cleethorpe
- 0472 58561

### KENT

- Kent Micro Computer Medstone
- 0622 52784

### LANCASHIRE

- The Byte Shop Manchester Ltd
- 061 236 4737
- Merrill Computers Ltd Wigan
- 0942 495821
- Microbase Ltd Bentham
- 0468 62180
- Modern Electronics St Annes
- 0253 711875

### NSC COMPUTING

- Shops Ltd Manchester
- 061 832 2269

### LEICESTERSHIRE

- O A Computers Leicester
- 0533 549407

### LINCOLNSHIRE

- Felix Computers Boston
- 0205 65400

### LIVERPOOL/MERSEYSIDE

- Data Exchange Ltd
- 051 847 8185

### MIDDLESEX

- Microage Electronics Edgware
- 01 959 7119
- Twickenham Computer Centre Twickenham
- 01 891 1612

### NORFOLK

- Anglia Computer Centre Norwich
- 0603 26602
- Carlton Computers Ltd Great Yarmouth
- 0493 58898

### NORTHAMPTONSHIRE

- Deventry Computer Centre Daventry
- 03272 78058
- Furton Computers Ltd Northampton
- 0604 21051

### NOTTINGHAMSHIRE

- Leaslink Viewdata Nottingham
- 0602 396378/399454

### SHROPSHIRE

- Jentech Services Ltd Bridgnorth
- 07462 5287

### SOMERSET

- Somerset Business Computers Taunton
- 0823 62149
- The Computer Room Yeovil
- 0935 20268

### SUFFOLK

- Micro Management Ipswich
- 0473 53181
- Midwith Computer Co Ltd Ricklinghill
- 0379 898751

### SURREY

- Croydon Computer Centre
- 01 889 1280
- J S Simnett Computers Ltd Kingston upon Thames
- 01 546 3793
- PJ Equipments Ltd Guildford
- 0453 504801
- 3D Computers Sutton
- 01 337 4317
- 3D Computer Centre Sutton
- 01 642 2534

### SUSSEX

- Castle Electronics Haslemere
- 0424 437875
- Gamei Brighton
- 0273 698424

### MICROCENTRE

- Bognor Regis
- 0243 827778

### TYNE AND WEAR

- H G C S Gateshead
- 0532 821924
- Newcastle Computer Services Newcastle-upon-Tyne
- 0632 751166

### WEST MIDLANDS

- Walters Computer Systems Ltd Stourbridge
- 03843 70811/2/3

### YORKSHIRE

- Customised Electronics Ltd Leeds
- 0532 792332
- Datron Computers & Supplies Sheffield S10
- 0742 755105
- Datron Micro Centre Sheffield S7
- 0742 655490
- Elitec Services Ltd Bradford
- 0274 491371
- Micro Power Leeds LS7
- 0532 683186
- Pennine Computers Co Ltd Halifax
- 0422 41719
- Superior Systems Ltd Sheffield 1
- 0742 755005

### WALES

- Cardiff Microcomputers Cardiff
- 0222 373072
- Cardigan Electronics Cardigan
- 0239 514483
- Clwyd Technics Ltd Rhydymwyn, Ni Mold
- 05583 766
- K9 Computers Llangollen
- 0691 72 651

### SCOTLAND

- Edinburgh Computer Centre Edinburgh
- 031 229 4416
- Esco Computing Glasgow
- 041 221 0310
- Lom Computer Services Oban
- 0831 85635
- Personal Computers 'West Coast' Ayr
- 0292 285082
- Silicon Centre Edinburgh
- 031 557 4545
- Gate Microsystems Dundee
- 0382 28194


### NORTHERN IRELAND

- C E M Microcomputer Services Belfast
- 0232 4411/143564

### ISLE OF MAN

- Typeset Ltd Onchan
- 0624 25890/24850

# SPECTRUM

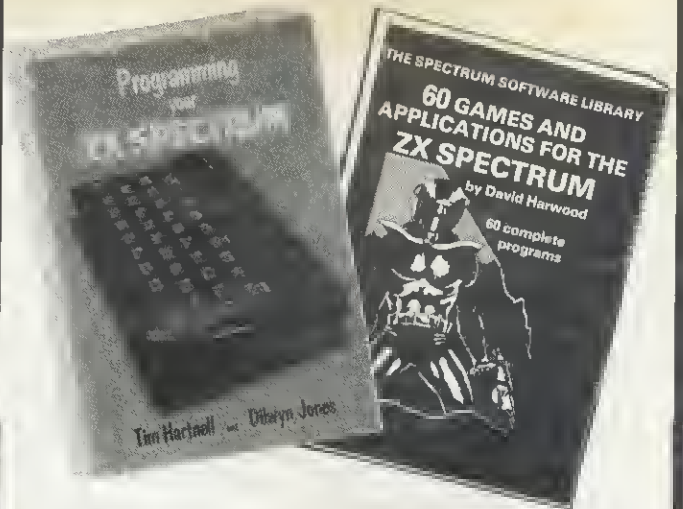

Make the most of your Spectrum, with these acclaimed books from the experts!

## PROGRAMMING YOUR ZX SPECTRUM

Tim Hartnell and Dilwyn Jones

More than 100 routines and programs, 230 pages, and value for every Spectrum user. Learn how to make the most of user-defined graphics (with a Pacman-like program, DOTMAN), sound, colour, and such commands as ATTR, SCREEN\$ and BRIGHT. From the co-ordinator of the National ZX Users' Club, Tim Hartnell. Just £6.95.

## THE SPECTRUM SOFTWARE LIBRARY

60 GAMES AND APPLICATIONS FOR THE ZX SPECTRUM!

By David Harwood

Arcade games, intelligent board games, brain games and utility programs. They're all here in this massive collection of 60 tested programs for the Spectrum, compiled by Interface columnist David Harwood. Just £4.95.

Interface,  
Dept., AA  
44-46 Earls Court Road, London, W8 6EJ  
Please send me:

( ) PROGRAMMING YOUR ZX SPECTRUM—£6.95

( ) THE SPECTRUM SOFTWARE LIBRARY—£4.95

( ) A sample issue of INTERFACE, the monthly magazine published by the National ZX Users' Club—£1.00


I enclose £

Name .....

Address .....




# A + F SOFTWARE A + F

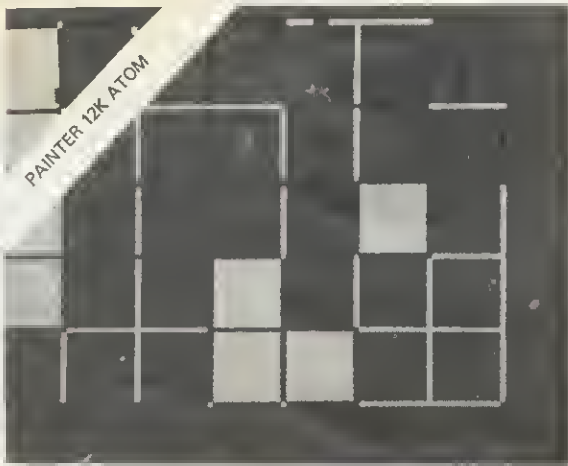


PAINTER 12K ATOM



TORPEDO RUN 12K ATOM

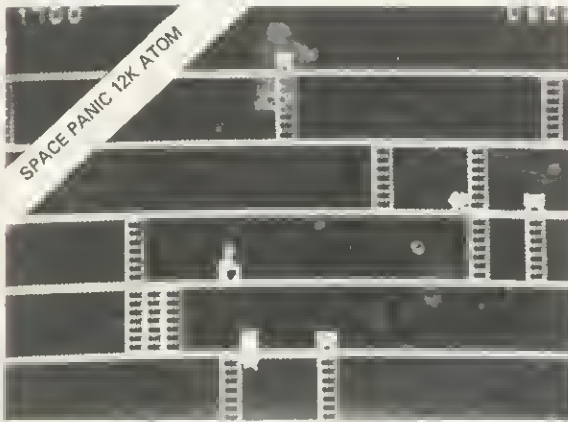

SPACE PANIC 12K ATOM

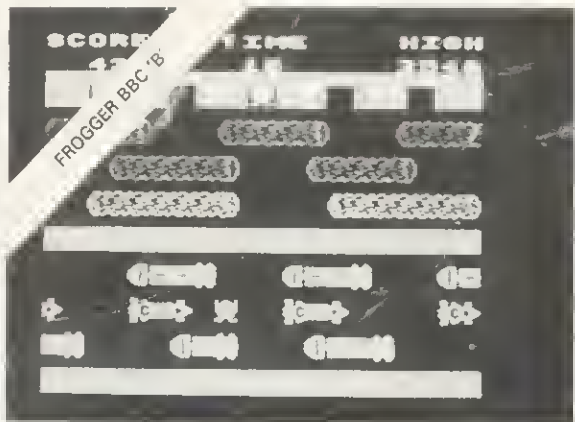

FROGGER BBC B

## 12K ATOM

Starburst	£5.75
Torpedo Run	£6.90
Cylon Attack	£6.90
Space Panic	£6.90
Painter	£6.90
Zodiac*	£6.90
Death Satellite*	£6.90

WE PAY 25% ROYALTIES FOR HIGH QUALITY PROGRAMS

Hours of enjoyment for all the family featuring fast moving graphics, sound effects and high score tables where appropriate.

## BBC MODEL A

Tower of Alos*	£6.90
(above also runs on Model B)	

## BBC MODEL B

Lunar Lander	£6.90
Early Warning	£6.90
Road Runner	£6.90
Frogger (Machine Code)	£8.00

\* Hours of Purgatory with these adventure games — can you get out alive?

\*\*\*\*\*  
 BBC 'B' BRAND NEW INTERACTIVE ADVENTURE GAME WITH SUPERB GRAPHICS.  
 'PHAROAH'S TOMB' WILL BE THE BEST £8.00 YOU HAVE EVER SPENT ON AN ADVENTURE  
 GAME.  
 \*\*\*\*\*

### ATOM 'TOOLKIT' EPROM

22 Extra Commands and Five features including  
 1200 Band Cass. operating System. £18.50

### ADD 4 or 6 EPROMS

TO YOUR ATOM WITH OUR 'ADDA' BOARDS  
 4-Way 'Adda' board £20.75  
 6-Way 'Adda' board £28.75

PLEASE NOTE: NO EXTRAS, ALL PRICES INCLUDE VAT AND POSTAGE

TO ORDER BY MAIL: SEND CHEQUE, POSTAL ORDER OR CREDIT CARD NUMBER  
 OR TELEPHONE (24 HOUR ANSWERING) CREDIT CARD NUMBER

VISIT OUR SHOWROOM FOR A DEMONSTRATION OR MAIL ORDER

**061-223 6206**      **TELEX: 667461 (Attn. A + F)**

**830 HYDE ROAD GORTON MANCHESTER M18 7JD**